


SHARP SERVICE MANUAL

S39E1SX-68JS7

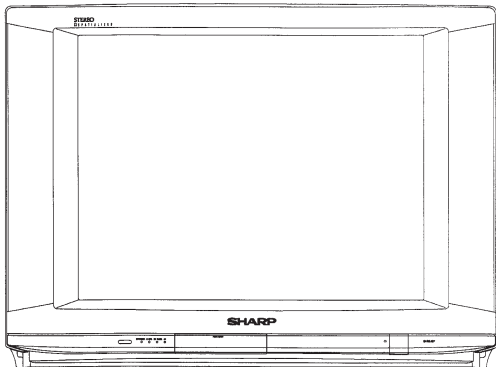

COLOUR TELEVISION
Chassis No. SP-60

SX-68JS7 MODELS SX-68JS9

In the interests of user-safety (Required by safety regulations in some countries) the set should be restored to its original condition and only parts identical to those specified should be used.

CONTENTS

	Page		Page
• FEATURES	2	• SOLID STATE DEVICE BASE DIAGRAM	13
• SPECIFICATIONS	2	• CHASSIS LAYOUT	14
• IMPORTANT SERVICE NOTES	3	• DESCRIPTION OF SCHEMATIC DIAGRAM	15
• ADJUSTMENT PRECAUTIONS	3	• SCHEMATIC DIAGRAM	15
• SERVICE MODE	4	• BLOCK DIAGRAM	26
• SERVICE ADJUSTMENT	5	• PRINTED WIRING BOARD ASSEMBLIES	30
• TROUBLESHOOTING	9	• PARTS LIST	37
• WAVEFORMS	13		

WARNING

The chassis in this receiver is partially hot. Use an isolation transformer between the line cord plug and power receptacle, when servicing this chassis.
To prevent electric shock, do not remove cover. No user-serviceable parts inside. Refer servicing to qualified service personnel.

SHARP CORPORATION

FEATURES

- Auto search tuning system
- AI-OPC function
- 100 CH. program memory
- IGR(B/G) stereo sound
- Black stretch circuit
- CATV hyper band
- Digital comb filter
- 2 mode spatializer
- Apertural control circuit (Y/C Transient Improver)
- S Terminal.
- 6 language OSD
- 7-entertainment menufunction
- ON-TIMER/OFF-TIMER combination use
- Picture noise reduction circuit
- Blue back noise mute
- Front AV-IN terminal & Rear AV in/out terminal.
- AST BOX (SX-68JS9 Only)

SPECIFICATIONS

Convergence	Self Convergence System
Focus	Bi-Potential, Uni-Potential Electrostatic
Sweep Deflection	Magnetic
Intermediate Frequency	
Picture IF Carrier	38.9 MHz
Sound IF Carrier	33.4 MHz
Colour Sub-Carrier	
PAL/NTSC	34.47MHz
NTSC	35.32MHz
Power Input	AC 220-240V, 50/60Hz
Power Consumption	184W
Audio Power Output Rating	10 W x 2 (Max)
Speaker	
Size	6 x 13 cm Elliptic x 2pcs. + 4 cm Round x 2pcs.
Voice Coil Impedance	7 ohm at 400 Hz
Aerial Input Impedance	75 Ω Unbalanced
Receiving Channels	
PAL-B/G	
VHF	AU0 thru 12
UHF	AU28 thru 69
Receiving Frequency	
VHF	44.25MHz thru 463.25MHz
UHF	471.25MHz thru 863.25MHz

Specifications are subject to change without notice.

ADJUSTMENT PRECAUTIONS

This model's setting are adjusted in two different ways: though the I²C bus control and in the conventional analog manner. The adjustments via the I²C bus control include preset-only items and variable data.

1. Calling the service mode by the microprocessor.

- (1) Set the switch S1006 to the service mode position, and the microprocessor is put service mode. (Adjustment through the I²C bus control)
- (2) Press the CH DOWN key on the remote controller to get ready to select the modes one by one.
- (3) Press the CH UP key on the remote controller to get ready to select the modes in the order opposite to the above step(2). (See SERVICE MODE)
- (4) Using the VOLUME $\wedge$ /VOLUME $\vee$ keys on the remote controller, the data can be modified.
- (5) Set the switch S1006 to the normal mode (OFF) position, and the microprocessor is put out of the service mode.

2. Factory Presettings.

- (1) Set the switch S1006 to the service mode position and turn on the main power switch. Initial values are automatically preset only when a new E²PROM is used (judgement with the first 4 bytes).
- (2) The initial data are preset as listed in SERVICE MODE.
- (3) Some settings should be modified, and the others should remain as preset. For details, see SERVICE MODE.

Note: Once the chassis has been put together, be sure to set the switch S1006 to the service mode position first and then turn on the main power switch (See 2-(1) above). Turning on the power without initializing the E²PROM may cause a flow of excess beams.

IMPORTANT SERVICE NOTES

Maintenance and repair of this receiver should be done by qualified service personnel only.

SERVICING OF HIGH VOLTAGE SYSTEM AND PICTURE TUBE

When servicing the high voltage system, remove static charge from it by connecting a 10k ohm Resistor in series with an insulated wire (such as a test probe) between picture tube dag and 2nd anode lead. (AC line cord should be disconnected from AC outlet.)

1. Picture tube in this receiver employs integral implosion protection.
2. Replace with tube of the same type number for continued safety.
3. Do not lift picture tube by the neck.
4. Handle the picture tube only when wearing shatterproof goggles and after discharging the high voltage completely.

X-RAY

This receiver is designed so that any X-Ray radiation is kept to an absolute minimum. Since certain malfunctions or servicing many produce potentially hazardous radiation with prolonged exposure at close range, the following precautions should be observed:

1. When repairing the circuit, be sure not to increase the high voltage to more than 34.0 kV (at beam 0 μ A) for the set.
2. To keep the set in a normal operation, be sure to make it function on 30.5 $\pm$ 1.5kV (at beam 1.6mA) in the case of the set. The set has been factory-Adjusted to the above mentioned high voltage.
∴ If there is a possibility that the high voltage fluctuates as a result of the repairs, never forget to check for such high voltage after the work.
3. Do not substitute a picture tube with unauthorized types and/or brands which may cause excess X-Ray radiation.


BEFORE RETURNING THE RECEIVER

Before returning the receiver to the user, perform the following safety checks.

1. Inspect all lead dress to make certain that the leads are not pinched or that hardware is not lodged between the chassis and other metal parts in the receiver.
2. Inspect all protective devices such as non-metallic control knobs, insulating fishpapers, cabinet backs, adjustment and compartment covers or shields, isolation resistor- capacity networks, mechanical insulators etc.

SERVICE MODE

(1) Press the specific keys to change the mode as follows.

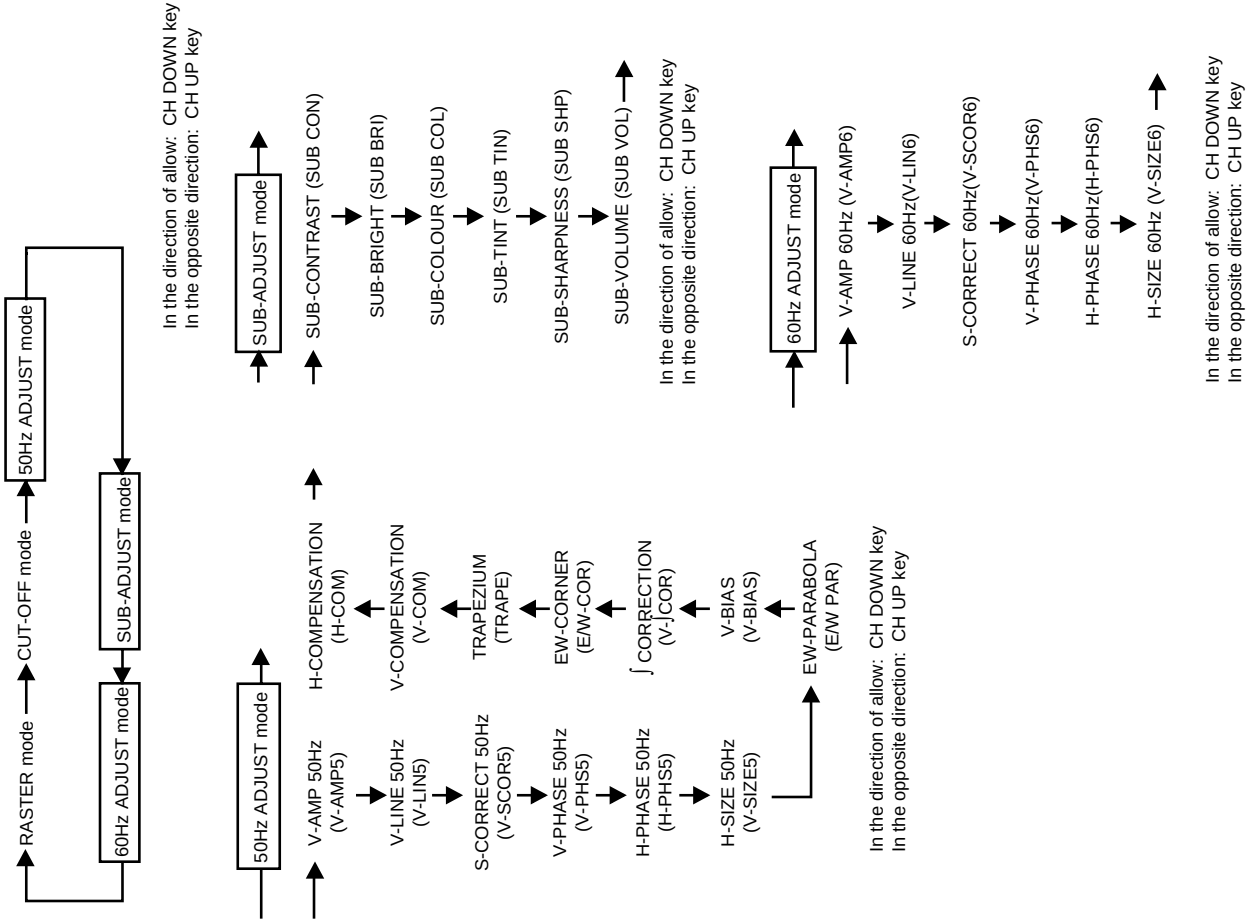

To go to the service mode, the data at the E²PROM's addresses 00H thru 03H are read. If the data are no as given below, the E²PROM is initialized according to the table below.

Address: Data

00H: 12H 02H: 87H


01H: 37H 03H: 54H

E ² PROM item	Data adjustable range	Data initial value	Remarks
(00H)		12H	
(01H)		37H	
(02H)		87H	
(03H)		54H	
R CUT OFF	384 ~ 1023	384	
G CUT OFF	384 ~ 1023	384	
B CUT OFF	384 ~ 1023	384	
G DRIVE	0 ~ 255	127	
B DRIVE	0 ~ 255	127	
50Hz V-AMP	0 ~ 127	66	0 *1
50Hz V-LINEARITY	0 ~ 31	22	0 *1
50Hz S-CORRECTION	0 ~ 31	15	0 *1
50Hz V-PHASE	0 ~ 7	4	0 *1
50Hz H-PHASE	0 ~ 31	11	+5 *1
50Hz H-SIZE	0 ~ 63	34	-1 *1
60Hz V-AMP	0 ~ 127	66	
60Hz V-LINEARITY	0 ~ 31	22	
60Hz S-CORRECTION	0 ~ 31	15	
60Hz V-PHASE	0 ~ 7	4	
60Hz H-PHASE	0 ~ 31	16	
60Hz H-SIZE	0 ~ 63	33	
EW-PARABOLA	0 ~ 63	40	
V-BIAS	0 ~ 7	4	
f-CORRECTION	0 ~ 15	15	
EW-CORNER	0 ~ 15	8	
TRAPEZIUM	0 ~ 63	28	
V-COMPENSATION	0 ~ 15	4	
H-COMPENSATION	0 ~ 15	4	
BELL FILTER	0 ~ 7	4	
SECAM R-Y	0 ~ 15	6	
SECAM B-Y	0 ~ 15	6	
CHROMA GATE PULSE	0 ~ 15	0	
SUB-CONTRAST	0 ~ 127	127	
SUB-BRIGHT	0 ~ 255	127	
SUB-COLOUR	0 ~ 115	55	
SUB-TINT	0 ~ 127	63	
SUB-SHARPNESS	0 ~ 127	63	
SUB-VOLUME	43 ~ 53	53	
BS DET SRT POINT (LEVEL)	0 ~ 15	3	
8MHz f RESPONSE(RS)	0 ~ 7	0	
SRT TRACKING (RTC)	0 ~ 7	4	
V/C/J BS (BS)	0 ~ 1	0	

3. RF AGC CUT-IN ADJUSTMENT: R259

1. Receive the "PAL COLOUR BAR" signal.
2. Field strength: 57 ± 1 dB μ V (75 ohms open)
Connect the oscilloscope to P201, as shown in **Fig. 4**.
3. Bias box: About 6.5V
4. Turn R259 slowly in the opposite direction until the voltage goes down 0.1V below the highest level.
5. Adjust the signal level to 63-67 dB μ V and make sure there are no noise.
6. Now adjust the signal level to 90-95 dB μ V and make sure there is no chrominance modulation beat.

Note: If a 50 ohm field strength meter is used without a 50/75 impedance converter, set the field strength to 55 ± 1 dB μ V. Pay attention to a loss that would be caused by the converter.

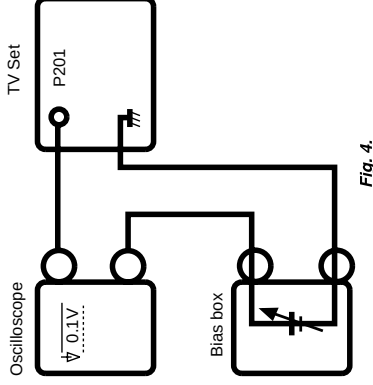

4. VIDEO DETECTION LEVEL ADJUSTMENT: R235

1. Receive the "B/G SYSTEM PAL COLOUR BAR" signal (100% white colour bar).
2. Adjust R235 so that the video output at the AV OUT terminal be 1.0 ± 0.05 Vp-p with a 75-ohm termination.

DIGITAL COMB FILTER Y LEVEL ADJUSTMENT

1. DIGITAL COMB FILTER Y LEVEL ADJUSTMENT: R5467

1. Receive the PAL colour bar (100% white colour bar) signal. (1.0 Vp-p)
2. Connect the oscilloscope to TP5462 (emitter of Q5467).
3. Adjust R5467 so that the Y signal (100% white) at TP5462 be 2.0 Vp-p ± 0.1 Vp-p.

Note: Make sure that the signal is linearly amplified overall. (The 100% portion should be kept intact.)

SYNC DETECTION FREQUENCY ADJUSTMENT

1. SYNC DETECTION FREQUENCY ADJUSTMENT: R1685

1. Put the unit in the A/V mode with no signal input.
2. Connect the frequency counter to TP1680 (on the MAIN unit PWB).
(Use a probe with small input capacitance: 10:1 or so of the oscilloscope)
3. Adjust R1685 so that the frequency counter should read 15.65 ± 0.05 kHz.

• Warm up the unit for 20 minutes or longer before starting this adjustment.

SOUND ADJUSTMENT

1. RF SUB-SOUND ADJUSTMENT: R256

1. Receive the "PAL COLOUR BAR" signal.
2. Signal: 400 Hz, 100% modulation
3. Connect the oscilloscope to the Audio Out (L or R) terminal. (Terminate with a 10 kohm impedance.)
4. Adjust R256 so that the 400 Hz sine wave be of 1.76 Vp-p.
5. Adjustment error: $1.76 \pm 0.04/-0.06$ Vp-p

2. SUB-SOUND ADJUSTMENT (bus adjustment)

1. Receive the "PAL COLOUR BAR" signal.
2. Signal: 400 Hz, 100% modulation (50 kHz dev.)
3. Turn up the volume control to maximum.
4. Connect the VTVM's probes to the SI connector (pin (1): L-ch, pin(2): Ground, pin (3): R-ch).
5. Adjust the sub-sound data so that the VTVM should be 8.35 ± 0.1 Vrms
6. Adjustment error: 8.35 ± 0.1 Vrms

Notes:

- Spatializer off
- In the S-Normal mode
- S-VOL control at MAX position
- Speaker impedance: 7 Ω

3. NOISE MUTE CHECKING

1. Receive the "PAL COLOUR BAR" signal.
2. Turn up the volume control to maximum and make sure the sound is heard from the speakers. Then put the unit in the no-signal state.
3. Be sure that the sound mute is effective.
4. Finally turn down the volume control minimum.

PURITY ADJUSTMENT

1. Receive the green only signal or "MONOSCOPE PATTEN" signal. Adjust the contrast control to have a beam current of 1.1 mA.
2. Degauss the CRT enough with the degaussing coil.
3. Keep the purity magnet in the zero magnetic field in advance. Roughly adjust the convergence.
4. Observe the point "a" and "b", as shown in **Fig. A**, through a microscope. Adjust the landing to the rank "A" requirements.
5. Adjust the raster rotation to 0 eastward.
6. Tighten up the deflection coil screws.
7. Tightening torque: $108 \text{ N} \pm 20 \text{ N}$
(11 ± 2 kgf)

While observing the CRT screen corners, apply the magnet sheet to have the landing at rank "C".
Note: Before starting this adjustment, warm up the unit for 30 minutes or longer at a beam current of over 1300 μ A.





Fig. A

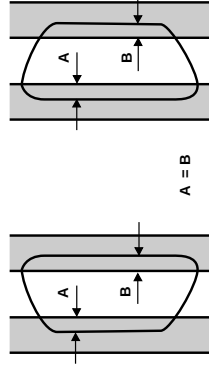

Rank "A" (on the right of the CRT)
Rank "A" (on the left of the CRT)

CONVERGENCE ADJUSTMENT

(To be done after the purity adjustment)

1. Receive the "CROSSHATCH PATTERN" signal.
2. Using the remote controller, call the Normal mode.

STATIC CONVERGENCE

1. Turn the 4-pole magnet to a proper opening angle in order to superimpose the blue and red colours.
2. Turn the 6-pole magnet to a proper opening angle in order to superimpose the green colour over the blue and red ones.

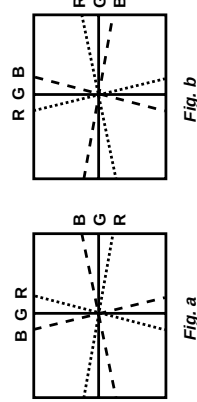


Fig. a

Fig. b



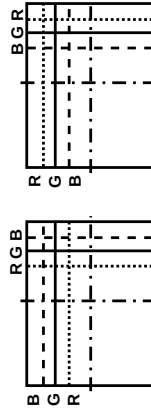


Fig. c

Fig. d

DYNAMIC CONVERGENCE

1. Adjust the convergence on the fringes of the screen in the following steps.
 - a) Fig. a: Drive the wedge at point "a" and swing the deflection coil upward.
 - b) Fig. b: Drive the wedge at points "b" and "c" and swing the deflection coil down ward.
 - c) Fig. c: Drive the "c" wedge deeper and swing the deflection coil rightward.
 - d) Fig. d: Drive the "b" wedge deeper and swing the deflection coil leftward.
2. Fix all the wedges on the CRT and apply glass tape over them.
3. Apply lacquer to the deflection yoke lock screw, magnet unit (purity, 4-pole and 6-pole magnets) and magnet unit lock screw.

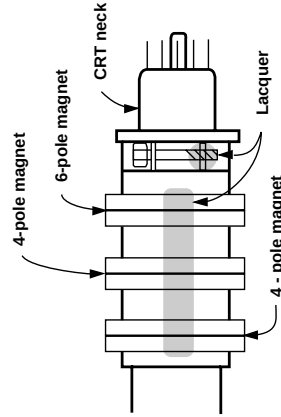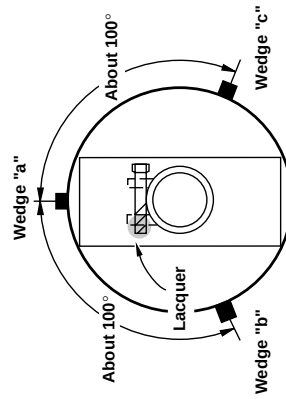

CRT CUT-OFF, BACKGROUND AND SUB-CONTRAST ADJUSTMENT

1. CRT CUT-OFF ADJUSTMENTS

Adjusting Point

1. Sub-Brightness: R890
2. Receive "MONOSCOPE PATTERN" signal.
3. Using the remote controller, call up the P-NORM mode. Turn on the service switch and select the cut-off/background mode.
4. Connect the oscilloscope to TP852 (RED cathode).
5. Set the screen control to 0/10 position.
6. Press the "g" key on the remote controller to reach the horizontal centering mode.
7. Adjust the sub-brightness control (R890) so that the blanking pulse on the oscilloscope screen be $10 \pm 1Vp-p$.
8. Disconnect the oscilloscope from TP852.
9. Turn the screen control clockwise until the horizontal raster of the first glimmering colour becomes slightly visible.
10. Adjust the cut-off data of the other two colours until the horizontal raster becomes whitish.

Note: The data can be turned up and down with the above keys.

- R CUT OFF UP "1" key
- R CUT OFF DOWN "4" key
- G CUT OFF UP "2" key
- G CUT OFF DOWN "5" key
- B CUT OFF UP "3" key
- B CUT OFF DOWN "6" key

11. Turn the screen control counterclockwise until the horizontal raster disappears.
Note: Before starting this adjustment, warm up the unit for 30 minutes or longer at a beam current of 1300 μA .

12. Press the "g" key on the remote controller to call the normal mode.

13. Using the remote controller, call the sub-brightness setting mode. (Receive the E-2CH signal).
14. Set the sub-brightness data so that the second black portion of the window pattern looks sinking. The service mode adjustment in the above steps (13) and (14) should be carried out after the white balance and background adjustments.

Note: Make sure the sub-brightness data is smaller than 129 (initial value 127). If above 130, go back to Step(7). Readjust the sub-brightness control(R890) so that the blanking pulse level on the oscilloscope screen be within $+0.5 Vp-p$ from the first-adjusted level. Now take Step(8) and the following over again. (The sub-brightness data is adjusted to about 20 steps lower.)

- If the sub-brightness data is above 130, there will be problem with the user's brightness control.

2. WHITE BALANCE and BACKGROUND I²C BUS ADJUSTMENT

1. Receive the "MONOSCOPE PATTERN" signal.
2. Using the remote controller, call the Video Normal mode.
3. Connect the beam ammeter between TP601 and TP602.
4. Roughly adjust R1631 (sub-contrast control) to have a beam current of about 1.6 mA.
5. Adjust the G-drive and B-drive data to have a colour temperature of 12300°K (white).

*12300°K X: 0.272 Y: 0.275

(with a Minolta colour temperature meter)

Note: The data can be turned up and down with the above keys.

- G-DRIVE UP "7" key
- G-DRIVE DOWN "8" key
- B-DRIVE UP "9" key
- B-DRIVE DOWN "0" key

6. Adjust the contrast and brightness controls to have a beam current of 200 μA . Now check the background clour. If the colour temperature is not 12300°K, go back to No. 1 on the preceding page.

Note: Before starting this adjustment, warm up the unit for 30 minutes or longer at a beam current of 1300 μA .

CRT CUT-OFF, BACKGROUND AND SUB-CONTRAST ADJUSTMENT (Continued)

SUB-CONTRAST ADJUSTMENTS

Adjusting Point

Sub-Contrast: R631

1. Receive the "MONOSCOPE PATTERN" signal.
2. Using the remote controller, call the Video Normal mode.
3. Connect the beam ammeter between TP601 and TP602.
 - Ammeter's full scale: 3mA range
 - Ammeter's positive (+) read: TP602
 - Ammeter's negative (-) read: TP601
4. Adjust R1009 (sub-contrast control) so that the beam current be 1.6 mA.

Note: Before starting this adjustment, warm up the unit for 30 minutes or longer at a beam current of 1300 μ A.

HORIZONTAL AND VERTICAL CIRCUIT ADJUSTMENT

1. SERVICE MODE DATA ADJUSTMENT

For this items 1 thru 6 below, use the remote controller in the service mode.

1. V-AMPLITUDE 50: Adjust the overscan 8.5% (E-5).
2. V-LINEARITY 50: Adjust to get the best linearity.
3. V-S-CORRECTION 50: Preset (readjust if the linearity is poor).
4. V-PHASE 50 (V-CENTER): Align the screen center with CRT's geometrical center (E-5)
5. H-PHASE 50 (H-CENTER): Align the screen center with CRT's geometrical center (E-5)
6. H-SIZE 50: Adjust the overscan 8.5% (E-5).
7. EW-PALABOLA (SIDE-PIN): Adjust so that the second vertical lines from the left and right ends of the crosshatch pattern be straight (E-2).
8. V-BIAS: Preset
9. V-S-CORRECTION: Preset
10. EW-CORNER (SUB-SIDEPIN): Preset (readjust if the picture quality at the corners is degraded.)
11. TRAPEZIUM: Preset (Readjust if the trapezium is poor). (25)
12. V-COMPENSATION: Preset
13. H-COMPENSATION: Preset
14. Others: For the V-HEIGHT 60, V-LINEARITY 60, V-S-CORRECTION 60, V-SHIFT 60, H-SHIFT 60, and H-WIDTH 60 adjustment, their corrected data are automatically entered when the corresponding 50 Hz mode adjustments are made.

2. FOCUS ADJUSTMENT

1. Receive the "MONOSCOPE PATTERN" signal.
2. Using the remote controller, call the Video Normal mode.
3. Adjust the focus control so that the center of screen is good focus.

PAL CHROMA ADJUSTMENT

1. SUB-COLOUR ADJUSTMENT (I²C bus adjustment, main picture)

1. Receive "PAL colour bar" signal.
2. Using the remote controller, call the Video Normal mode.
3. Connect the oscilloscope to TP852 (RED cathode). (Use a 10:1 probe.)
 - Range: 2V/div.
 - Sweep time: 20 μ sec/div.
4. Using the remote controller, call the sub-colour adjustment mode. Adjust the sub-colour data so that the 75% white and red portions of the PAL colour bar be at the same level. See Fig.6.
5. Clear the adjustment mode. (Now the 100% white and red portions will be at the same level.)


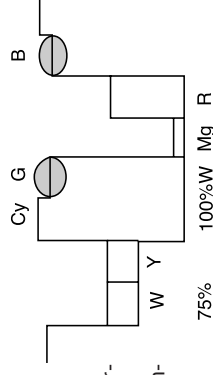


Fig. 5.



75% white and red to be.

Fig. 6.

NTSC CHROMA ADJUSTMENT

1. SUB-TINT ADJUSTMENT (main picture, I²C bus adjustment, inset picture)

1. Call the sub-tint adjustment mode. Receive the JA-8CH "NTSC COLOUR BAR" signal.
2. Connect the oscilloscope to TP806 (B-Y)
 - Range: 20mV/div.(AC)
 - Sweep time: 20 μ sec/div.
3. Adjust the sub-tint data to obtain the waveform as shown in Fig.10.
4. Clear the adjustment mode.

Note: TP806 IC801 55pin

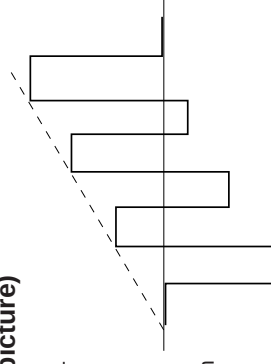


Fig. 7.

■ A/V INPUT AND OUTPUT CHECK

1. **AUDIO/VIDEO OUTPUT CHECK**
 1. Receive the E-12CH "PAL COLOUR BAR" signal (100% white colour bar, sound 400Hz, 100% mod.).
 2. Terminate the video output with a 75-ohm impedance. Make sure the output is as specified (1.0Vp-p ± 3dB).
 3. Terminate the audio output with a 10k-ohm impedance. Make sure the output is as specified (1.76Vp-p ± 3dB).
2. **AUDIO/VIDEO INPUT CHECK, S-TERMINAL INPUT CHECK**
 1. Using the TV/AV key on the remote controller, make sure that the modes change in order of TV, AV1, AV2, AV3 and TV again and that the video and audio outputs are according to the input and output terminals for each mode.
 2. In the AV1 mode, connect the connector to the S-VIDEO input terminal. Make sure the AV mode changes to the S-VIDEO mode, that the unit functions well, and that "AV1-S" appears on the screen.

3. **AV3 AUTOMATIC ID CHECKING**
 1. Using the remote controller, receive a TV broadcast signal.
 2. Feed the signal to the AV3 VIDEO input terminal. Make sure the AV3 mode shows up automatically.

*Setting: AUTO SELECT to be turn on.


■ PROTECTOR PERFORMANCE CHECK


1. **BEAM PROTECTOR**
 1. Receive the E-5CH "MONOSCOPE PATTERN" signal.
 2. Set the contrast control to maximum.
 3. Set the brightness control to maximum.
 4. Make a short-circuit between the collector and emitter of Q853 and make sure that the protector is activated and the stand-by mode is called.
2. **HIGH-VOLTAGE PROTECTOR**
 1. Receive the E-5CH "MONOSCOPE PATTERN" signal.
 2. Connect the bias box to the cathode (R1625 side) of D1607.
 3. Adjust the bias box voltage to 16V and make sure that the protector is not activated.

•Reference: usually about 19V


 4. Boost the bias box voltage to 24V and make sure that the protector is activated.
3. **OTHER PROTECTORS**
 1. In checking the performance of other protectors – for example, the one against shorting of smoothing electrolytic capacitor of + B line –, pay attention not to damage or deteriorate element.



TROUBLESHOOTING


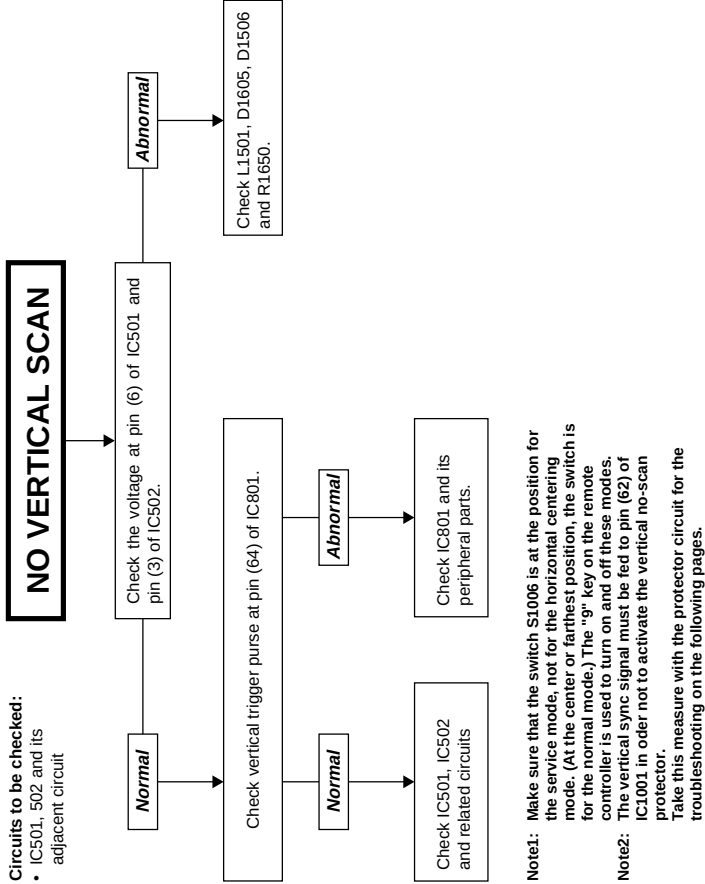


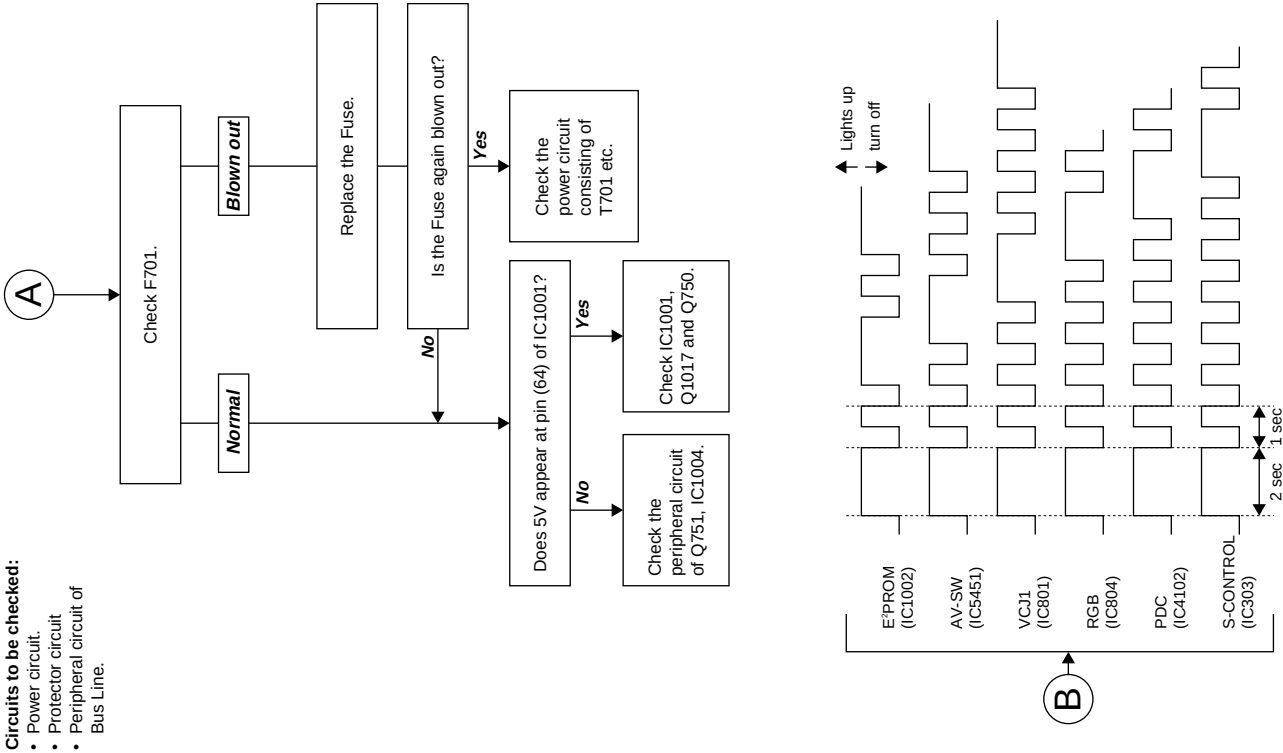

Other pattern: Other iC bus control IC or unit.
(It has SDA and SCL PORT.)

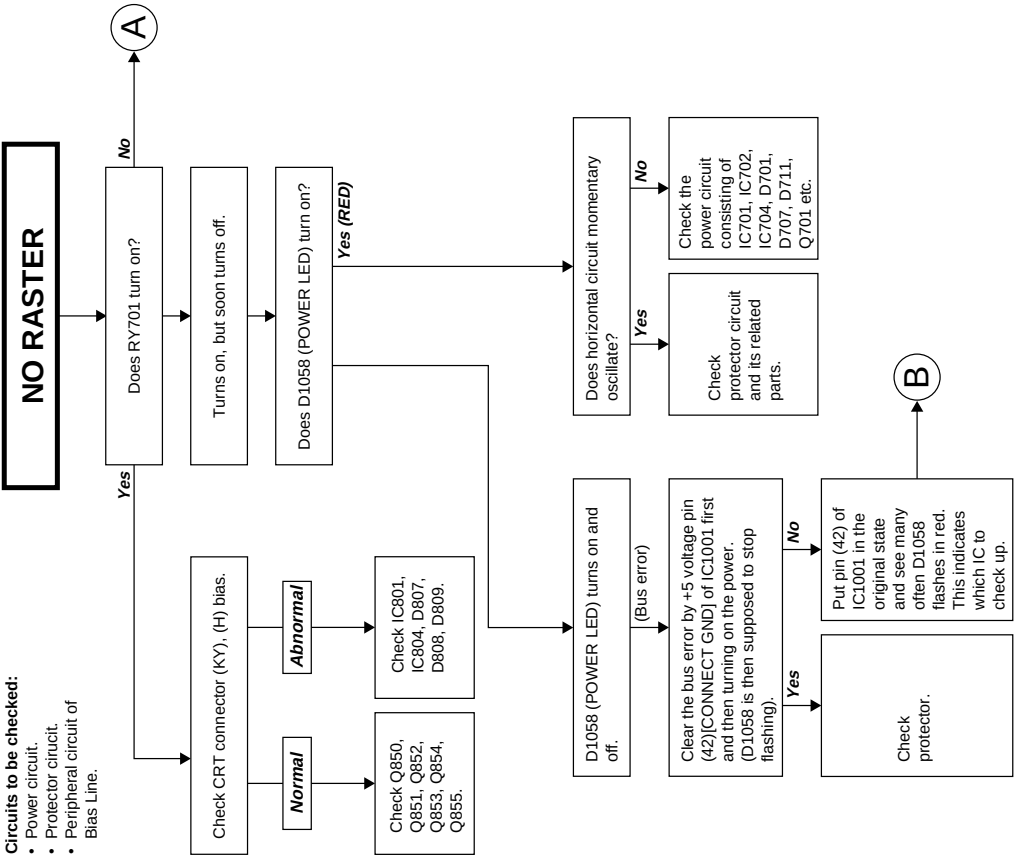

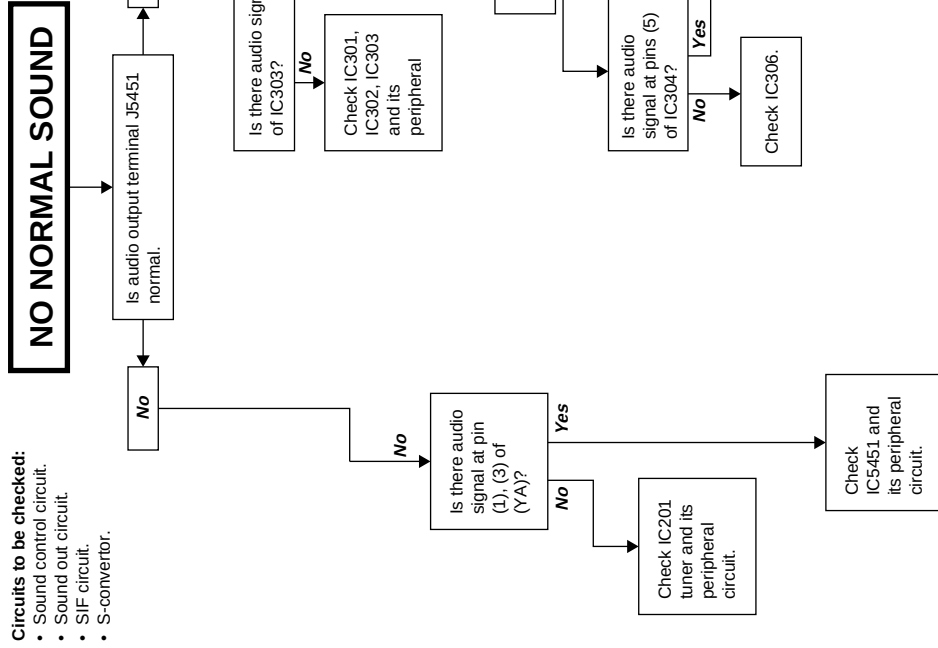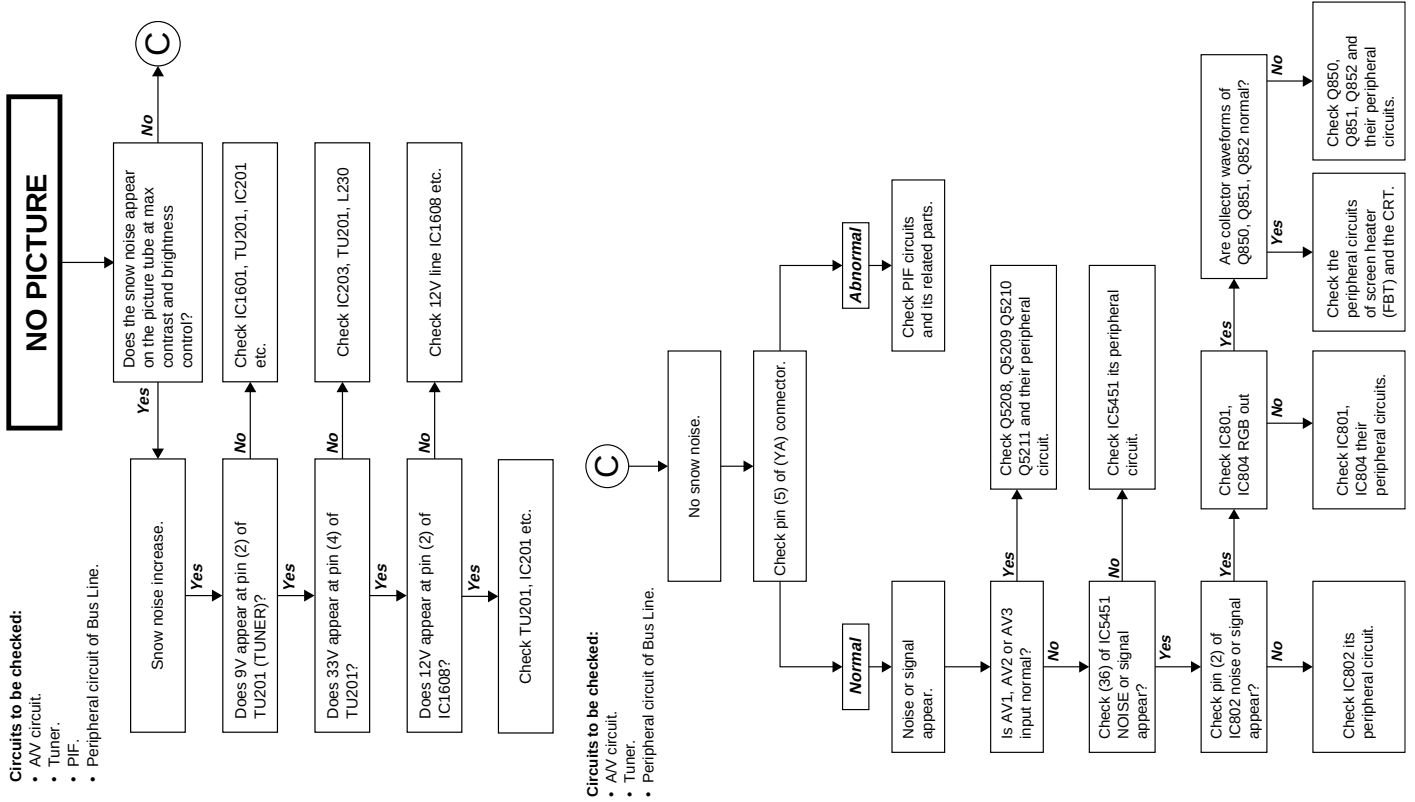


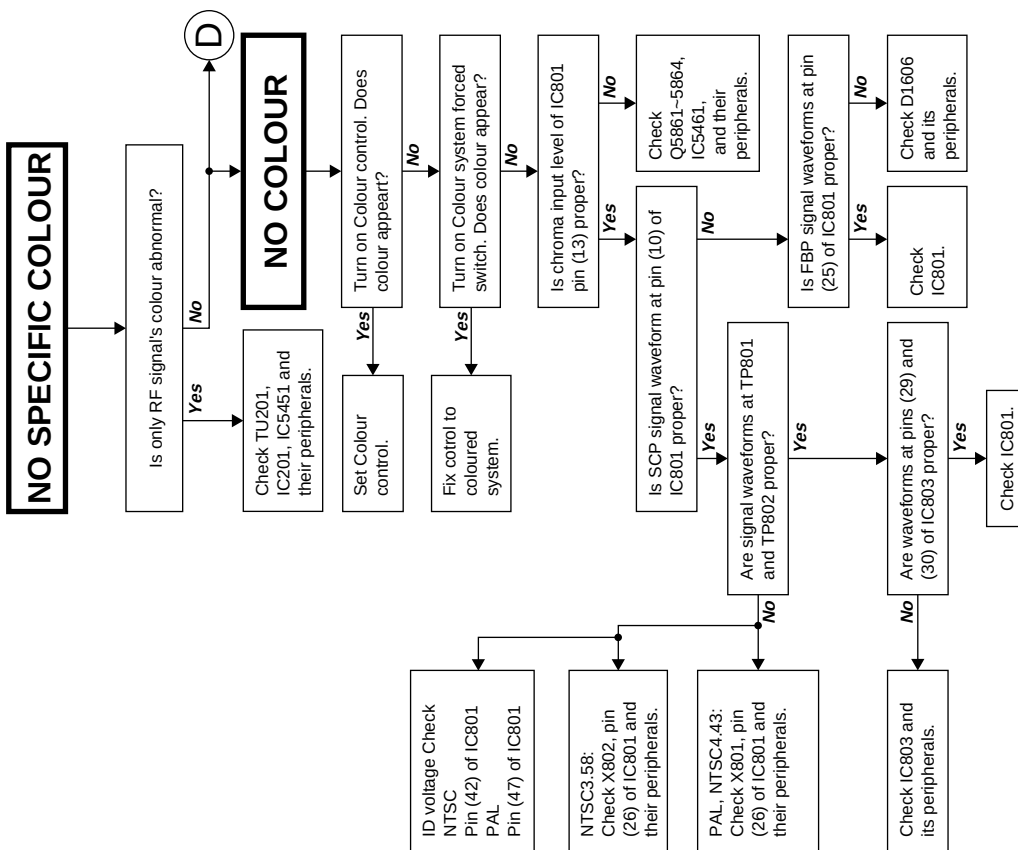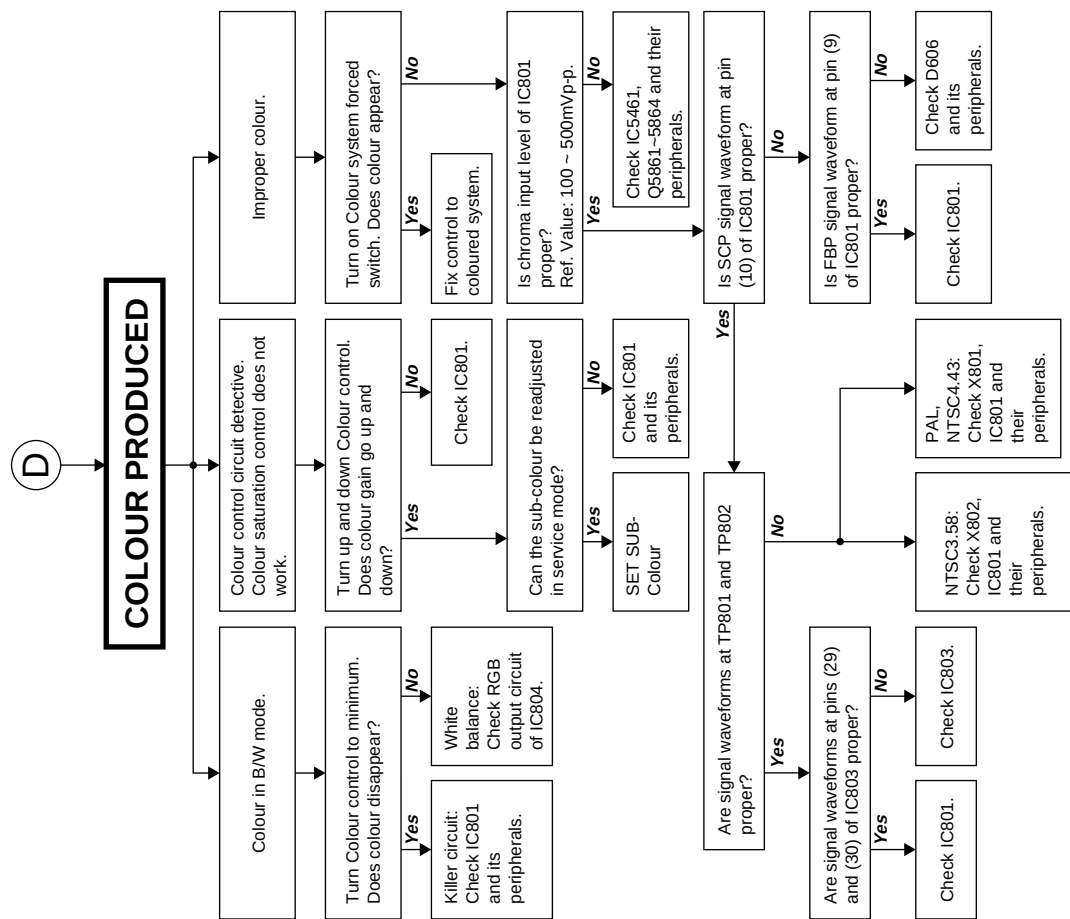



WAVEFORMS

SOLID STATE DEVICE BASE DIAGRAM


TOP VIEW

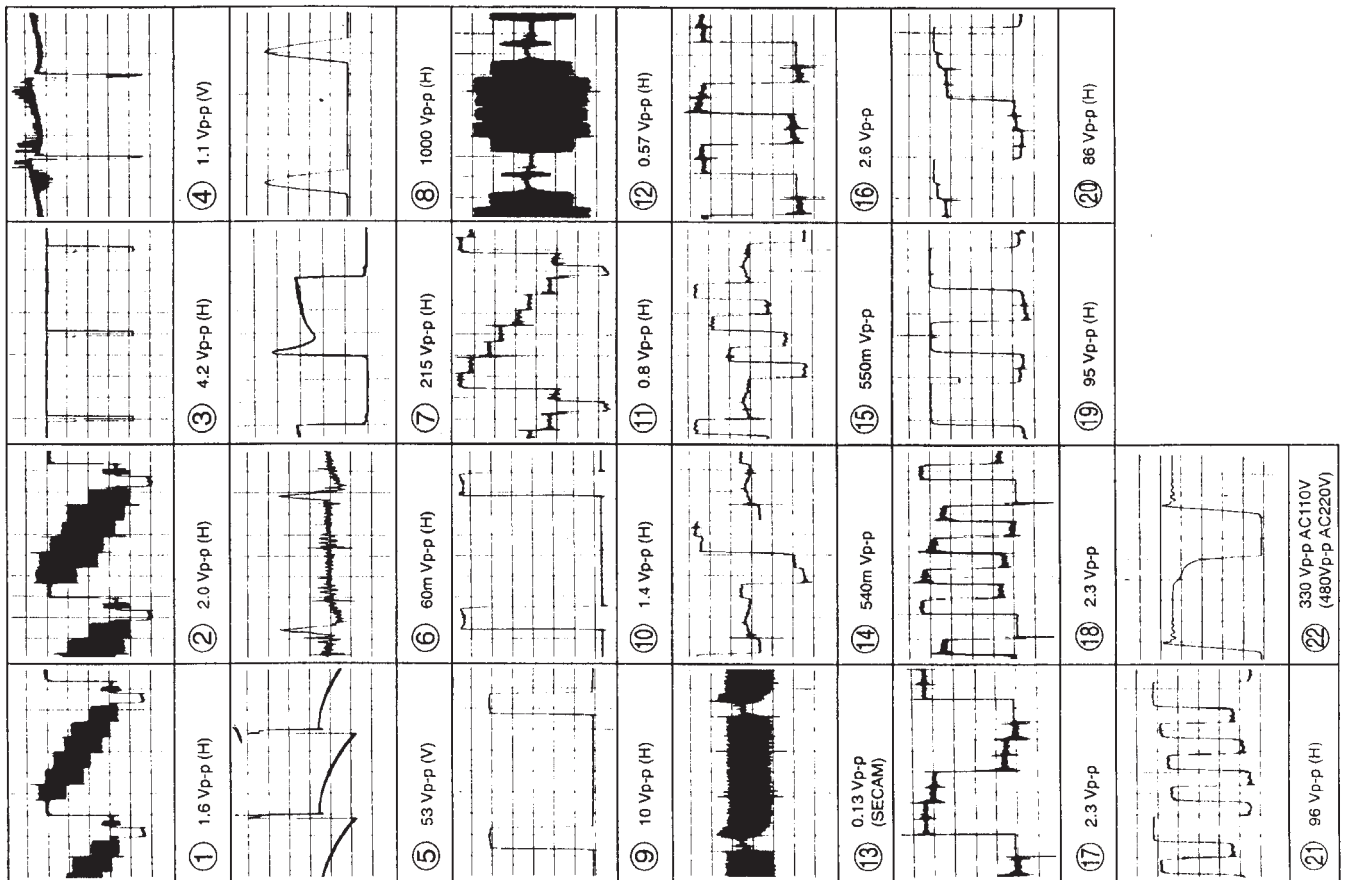

TOP VIEW

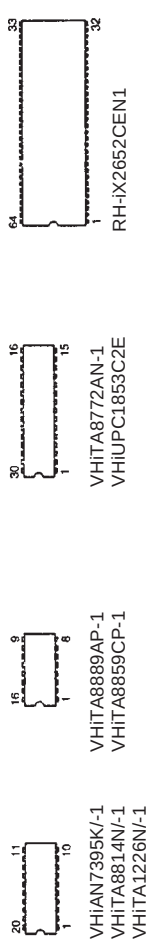

SIDE VIEW

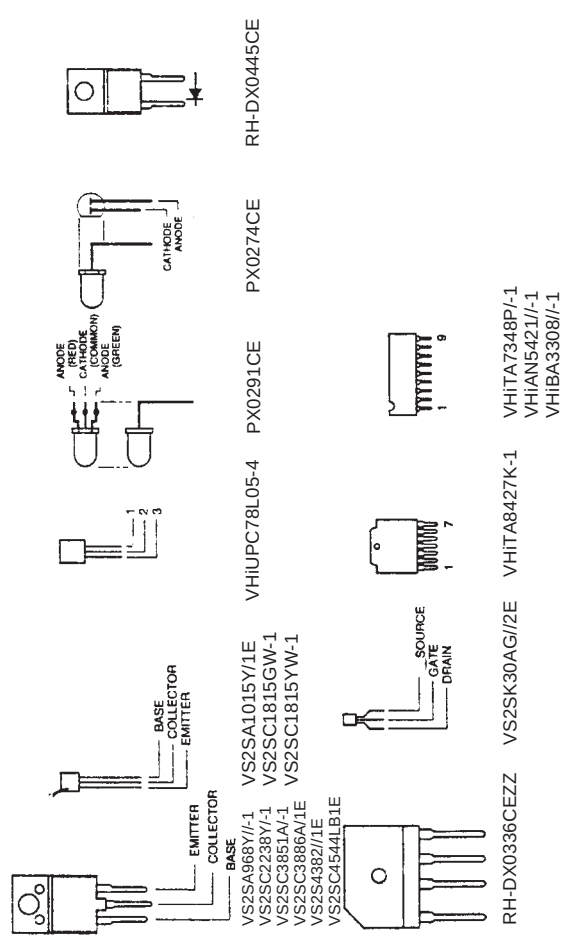





TUNER SCHEMATIC DIAGRAM


NOTE: The parts here shown are supplied as an assembly but not independently.

VTUVTSR6HD64/

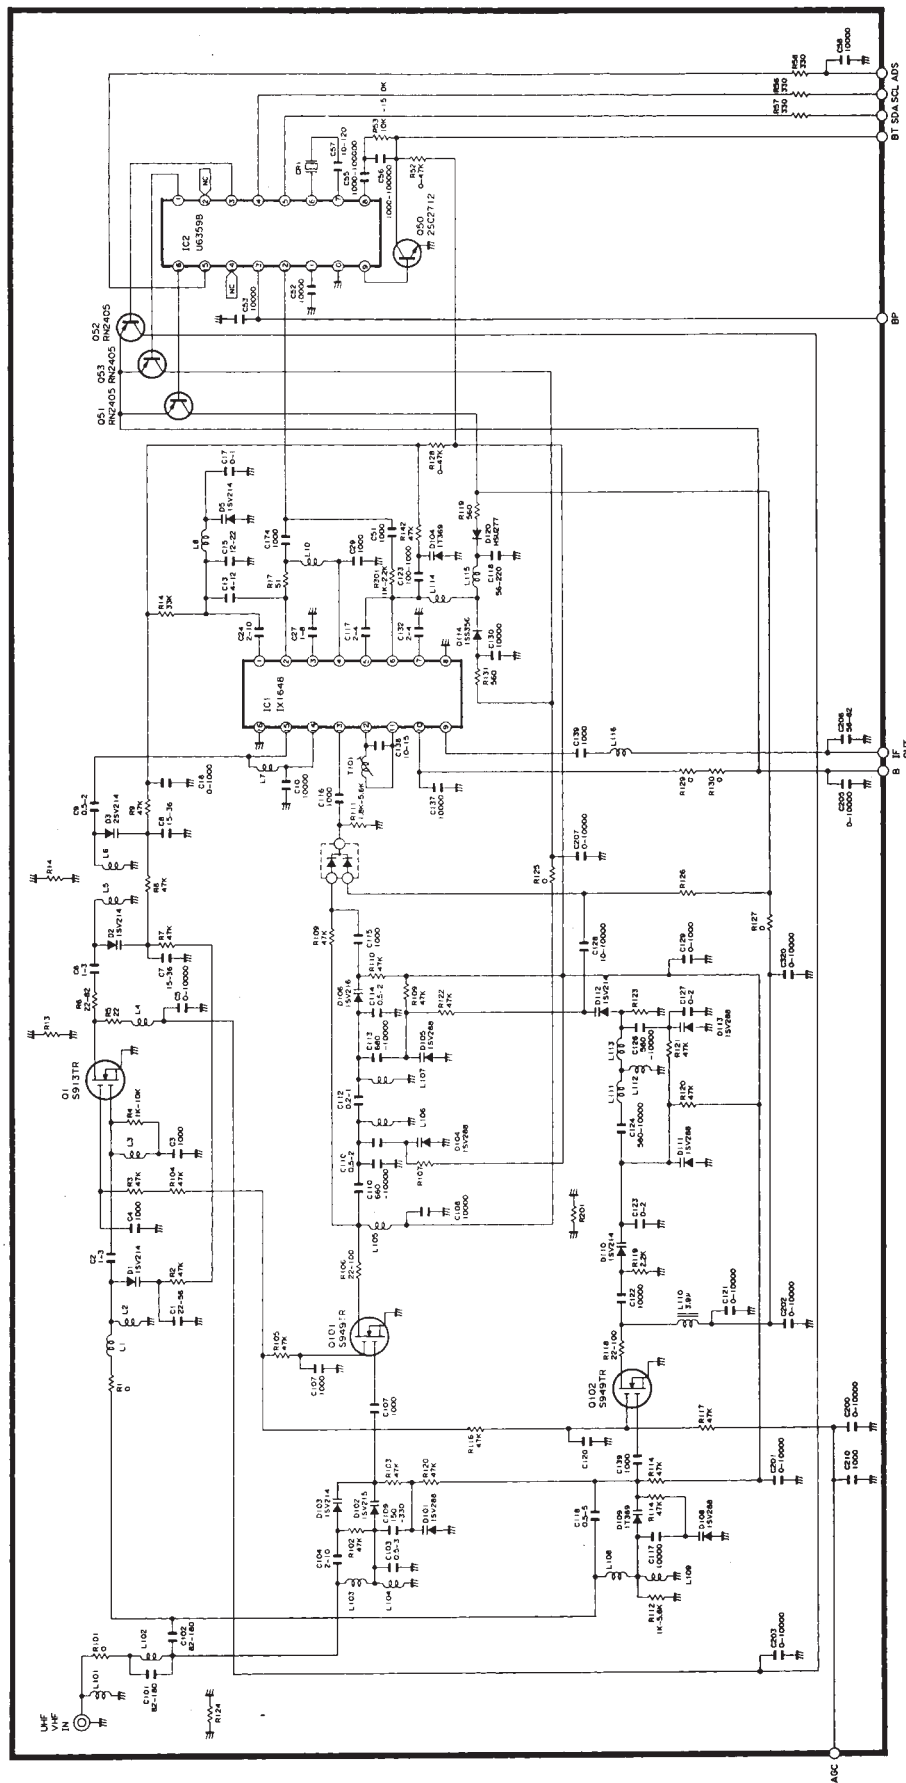

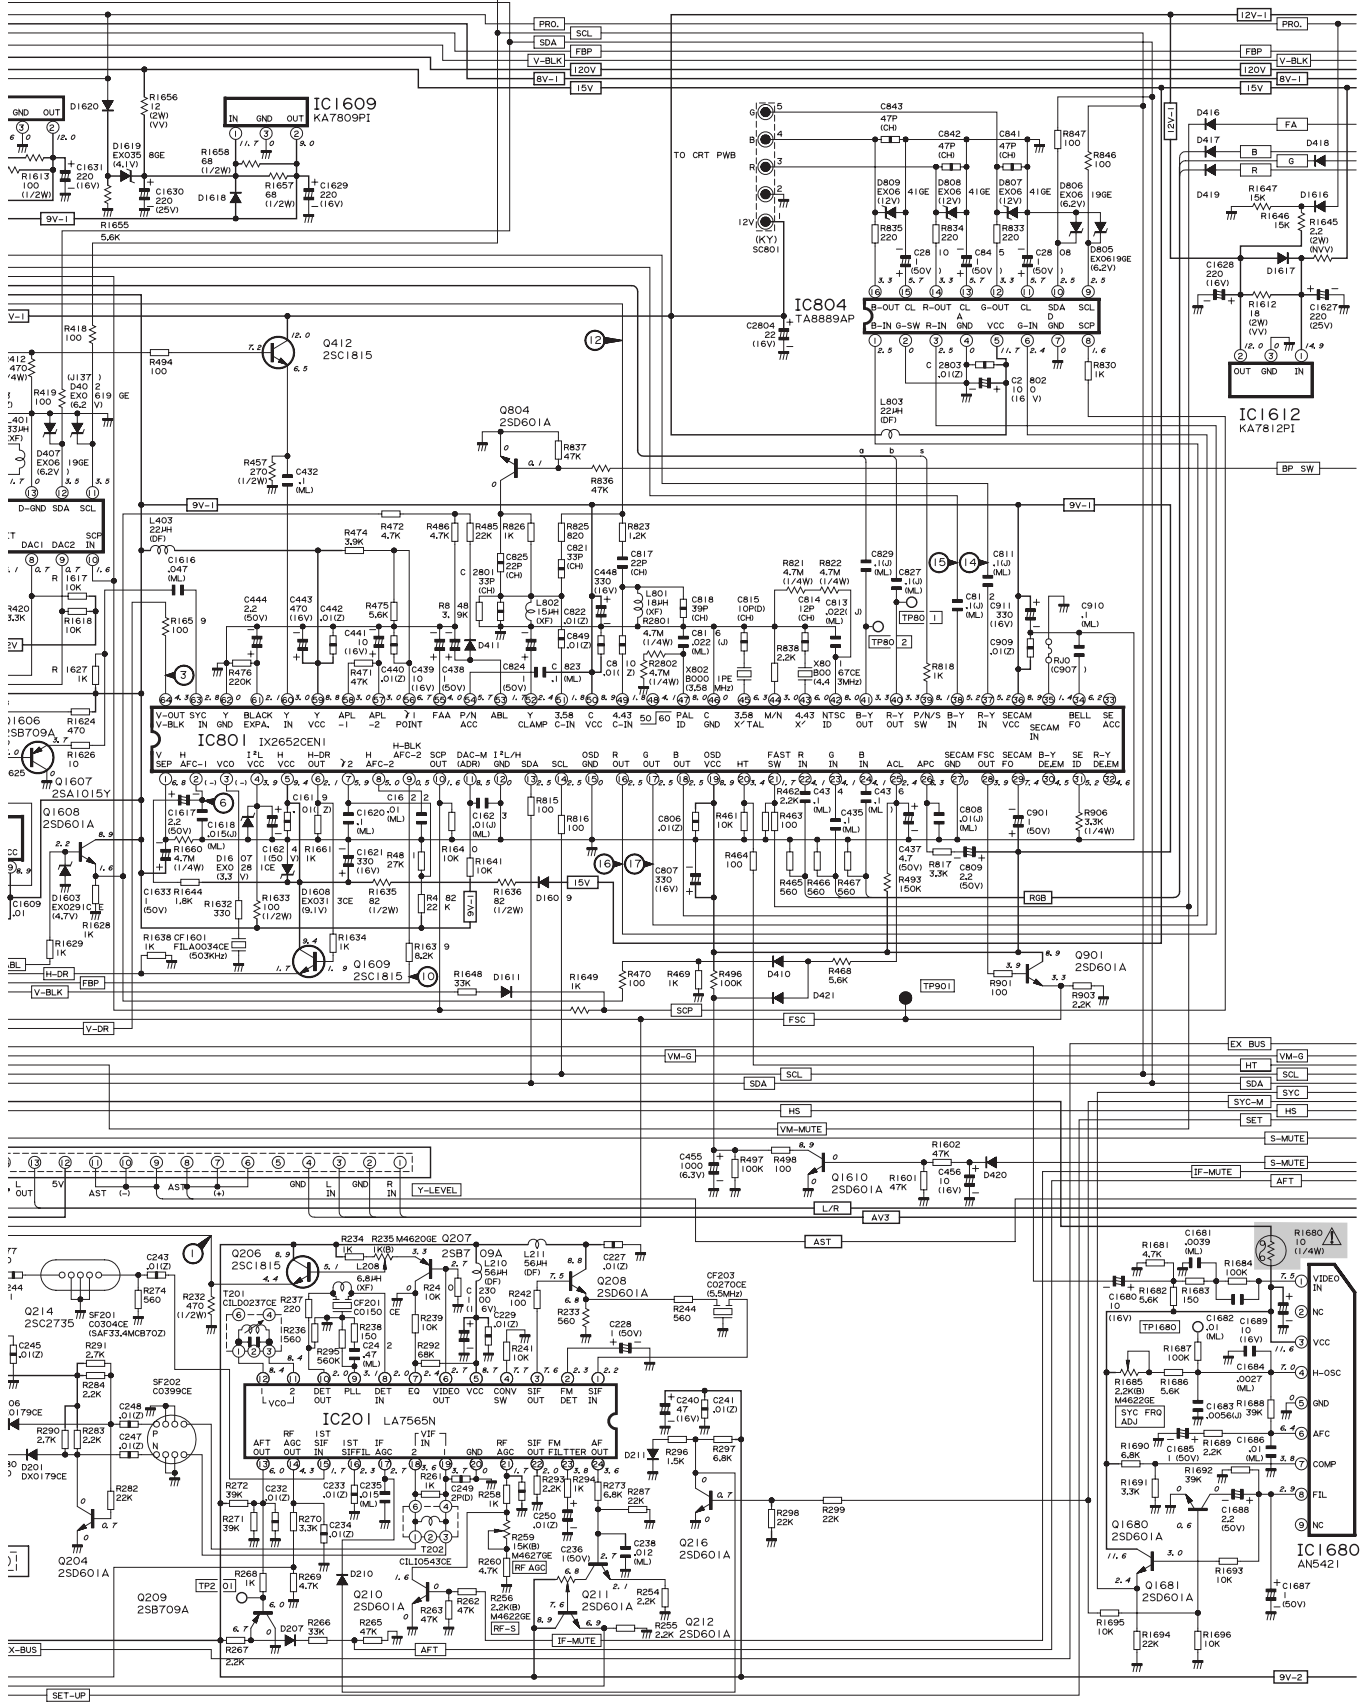


MAIN 2 UNIT SCHEMATIC DIAGRAM

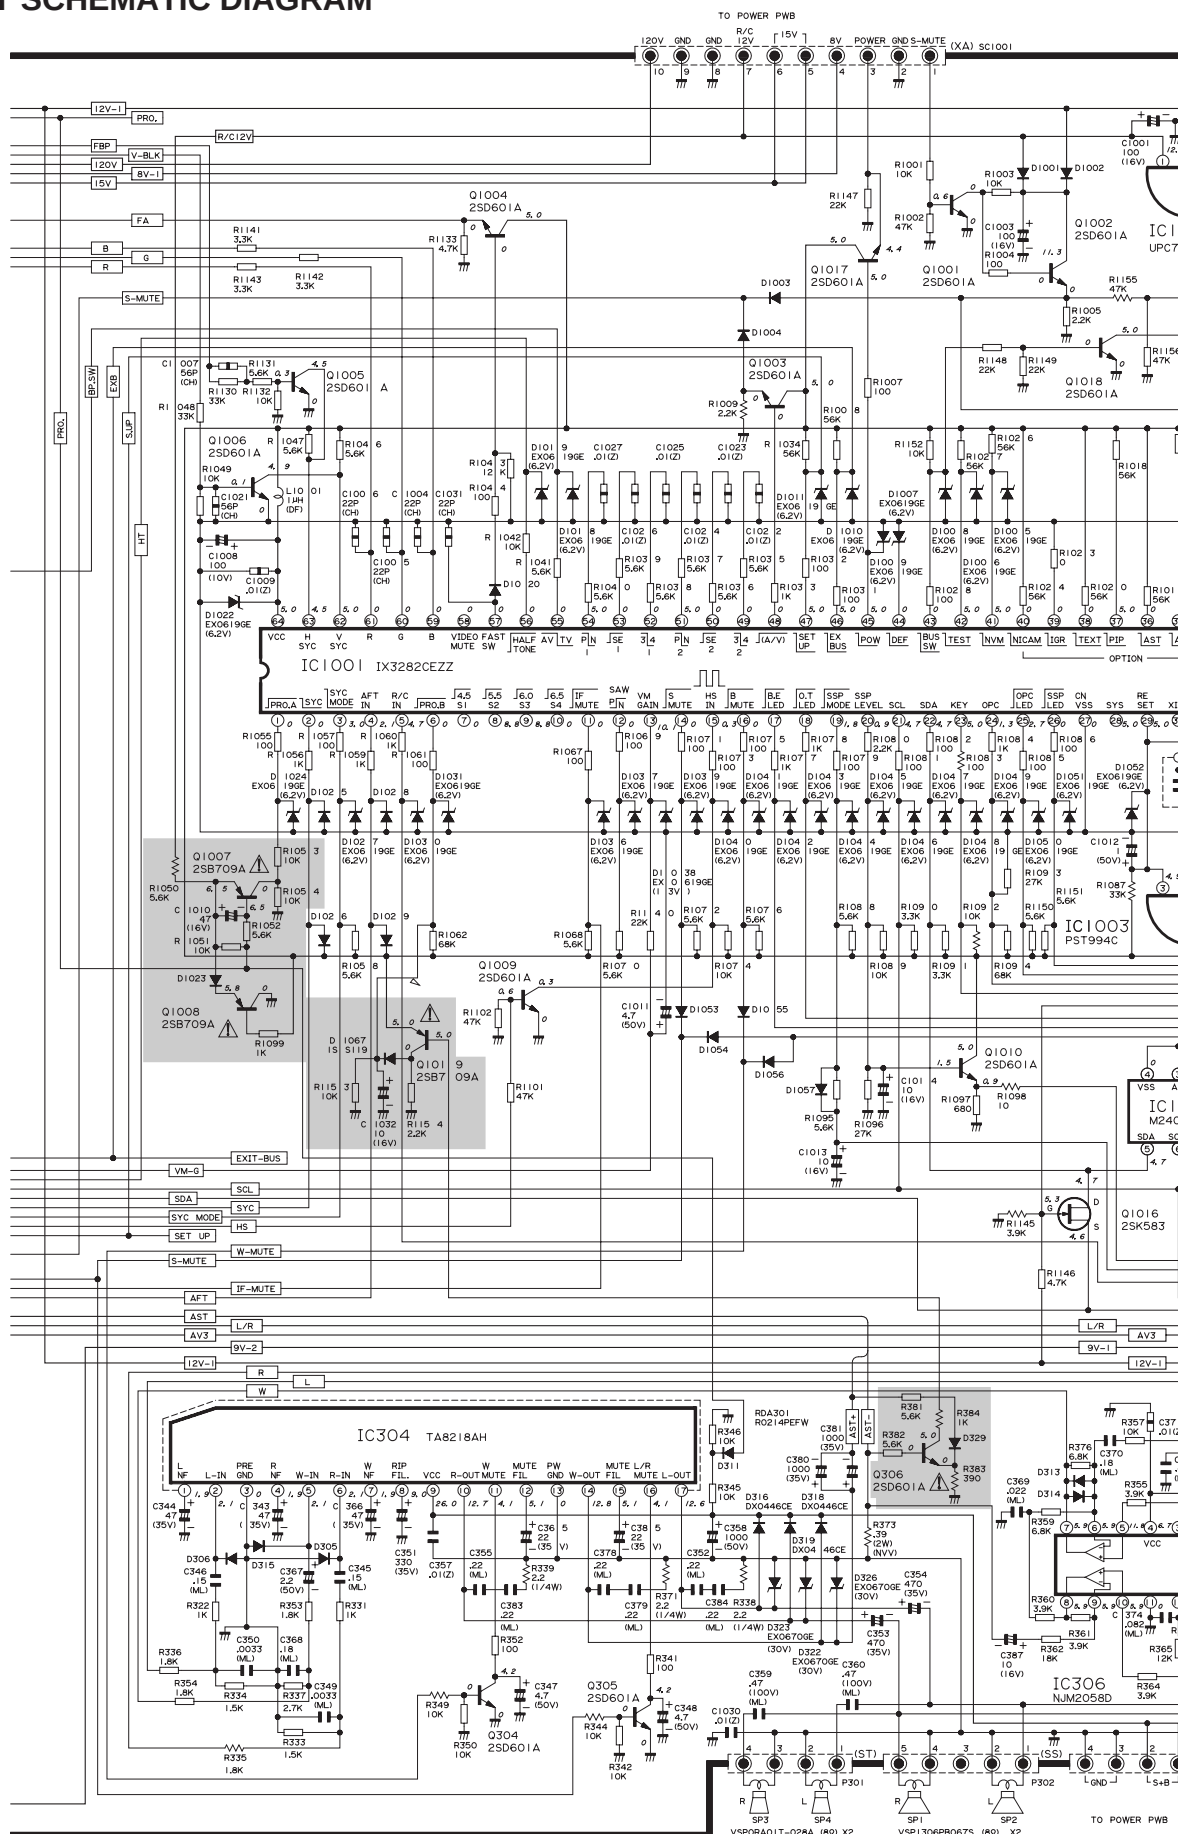


AV/DIG.-COMB UNIT SCHEMATIC DIAGRAM

PWB-D (AV/DIG.-COMB UNIT)
DUNT9077WEW5

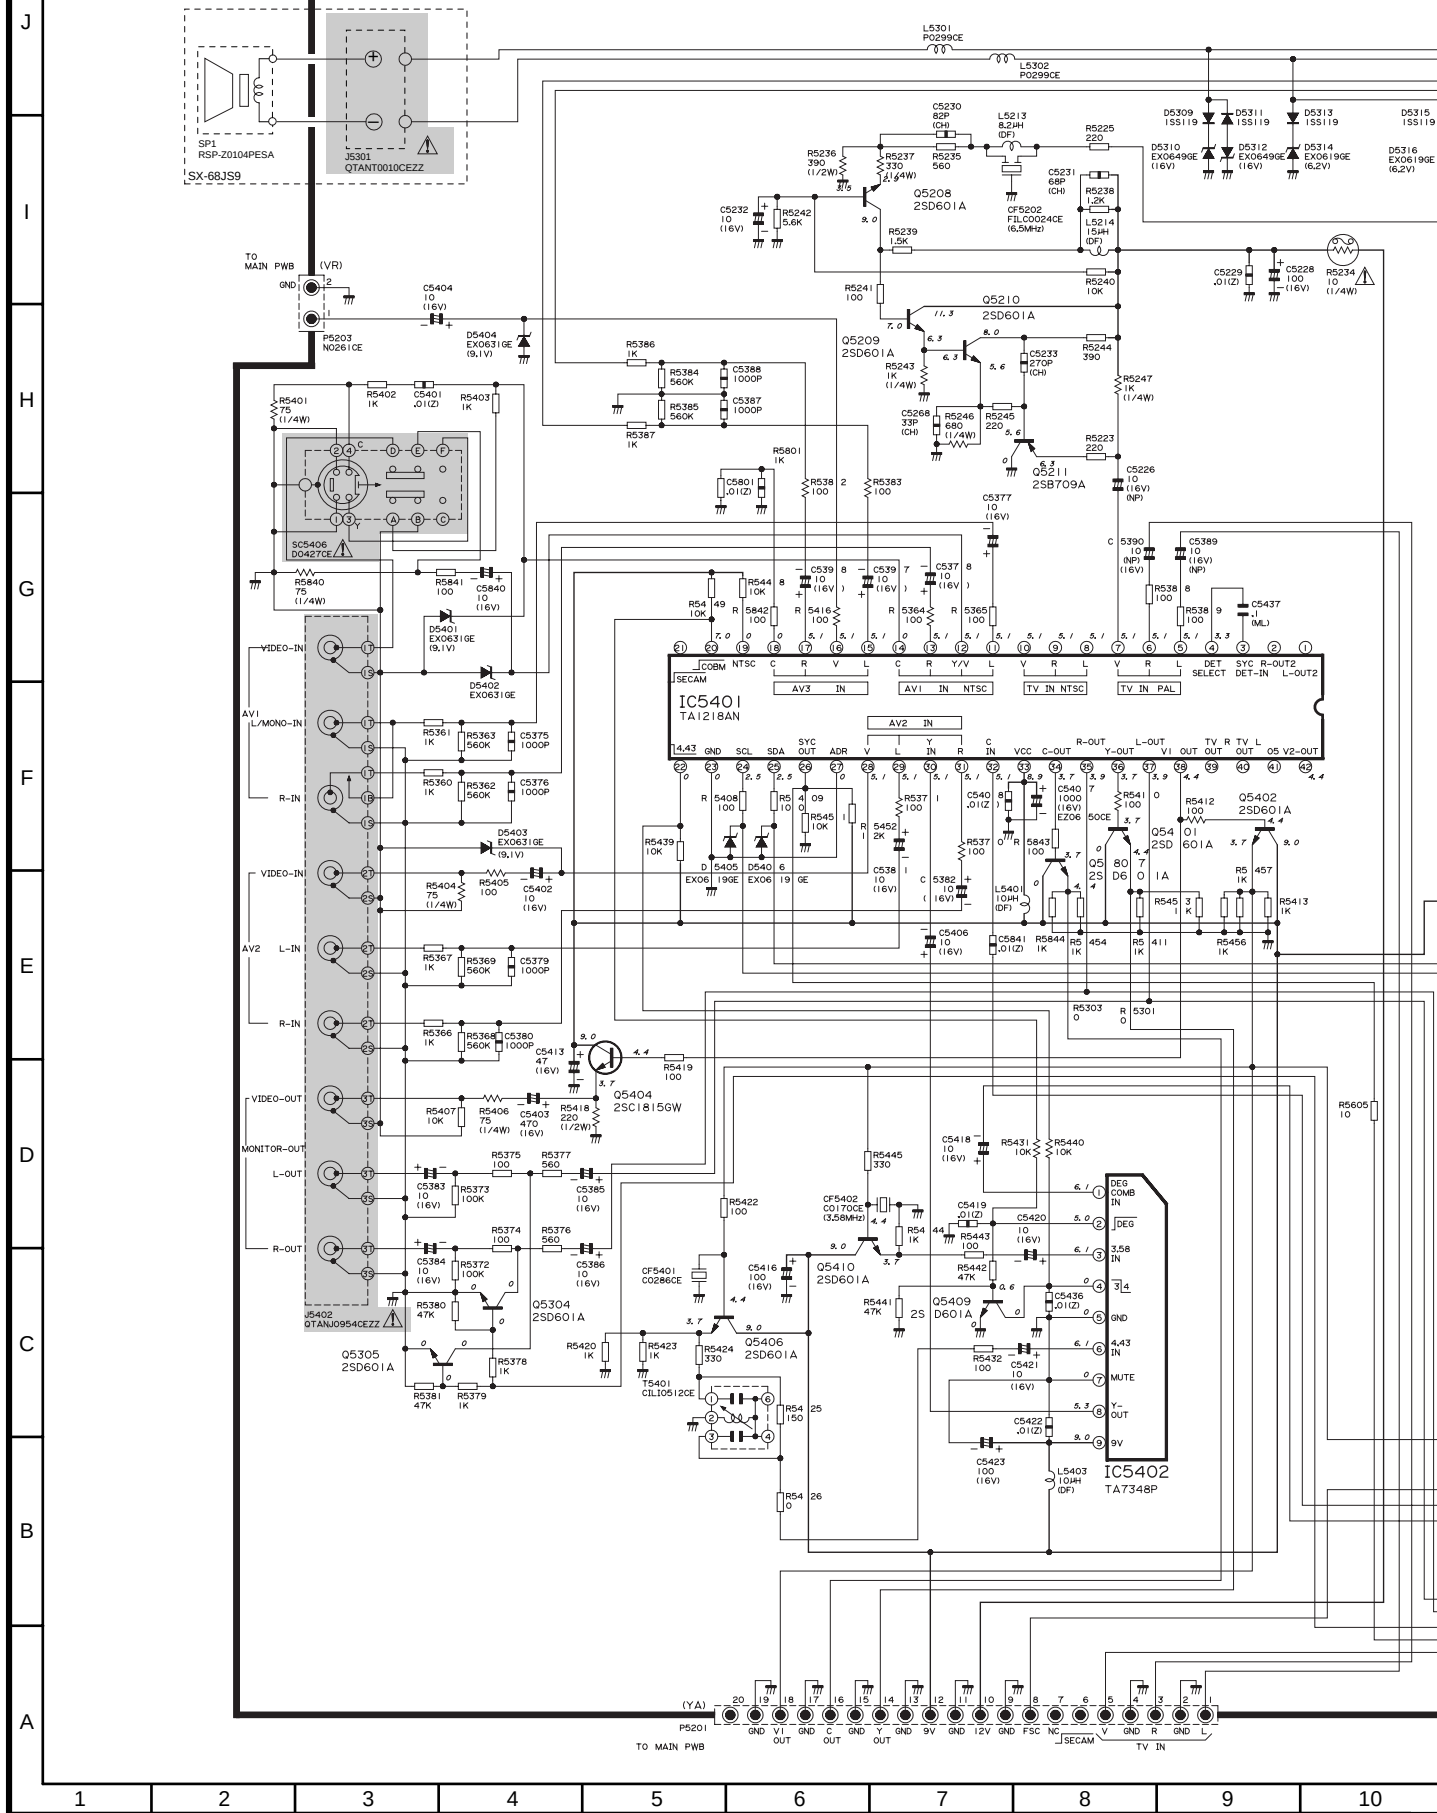


POWER UNIT SCHEMATIC DIAGRAM

PWB-E (POWER UNIT)
DUNTK9075WEW6

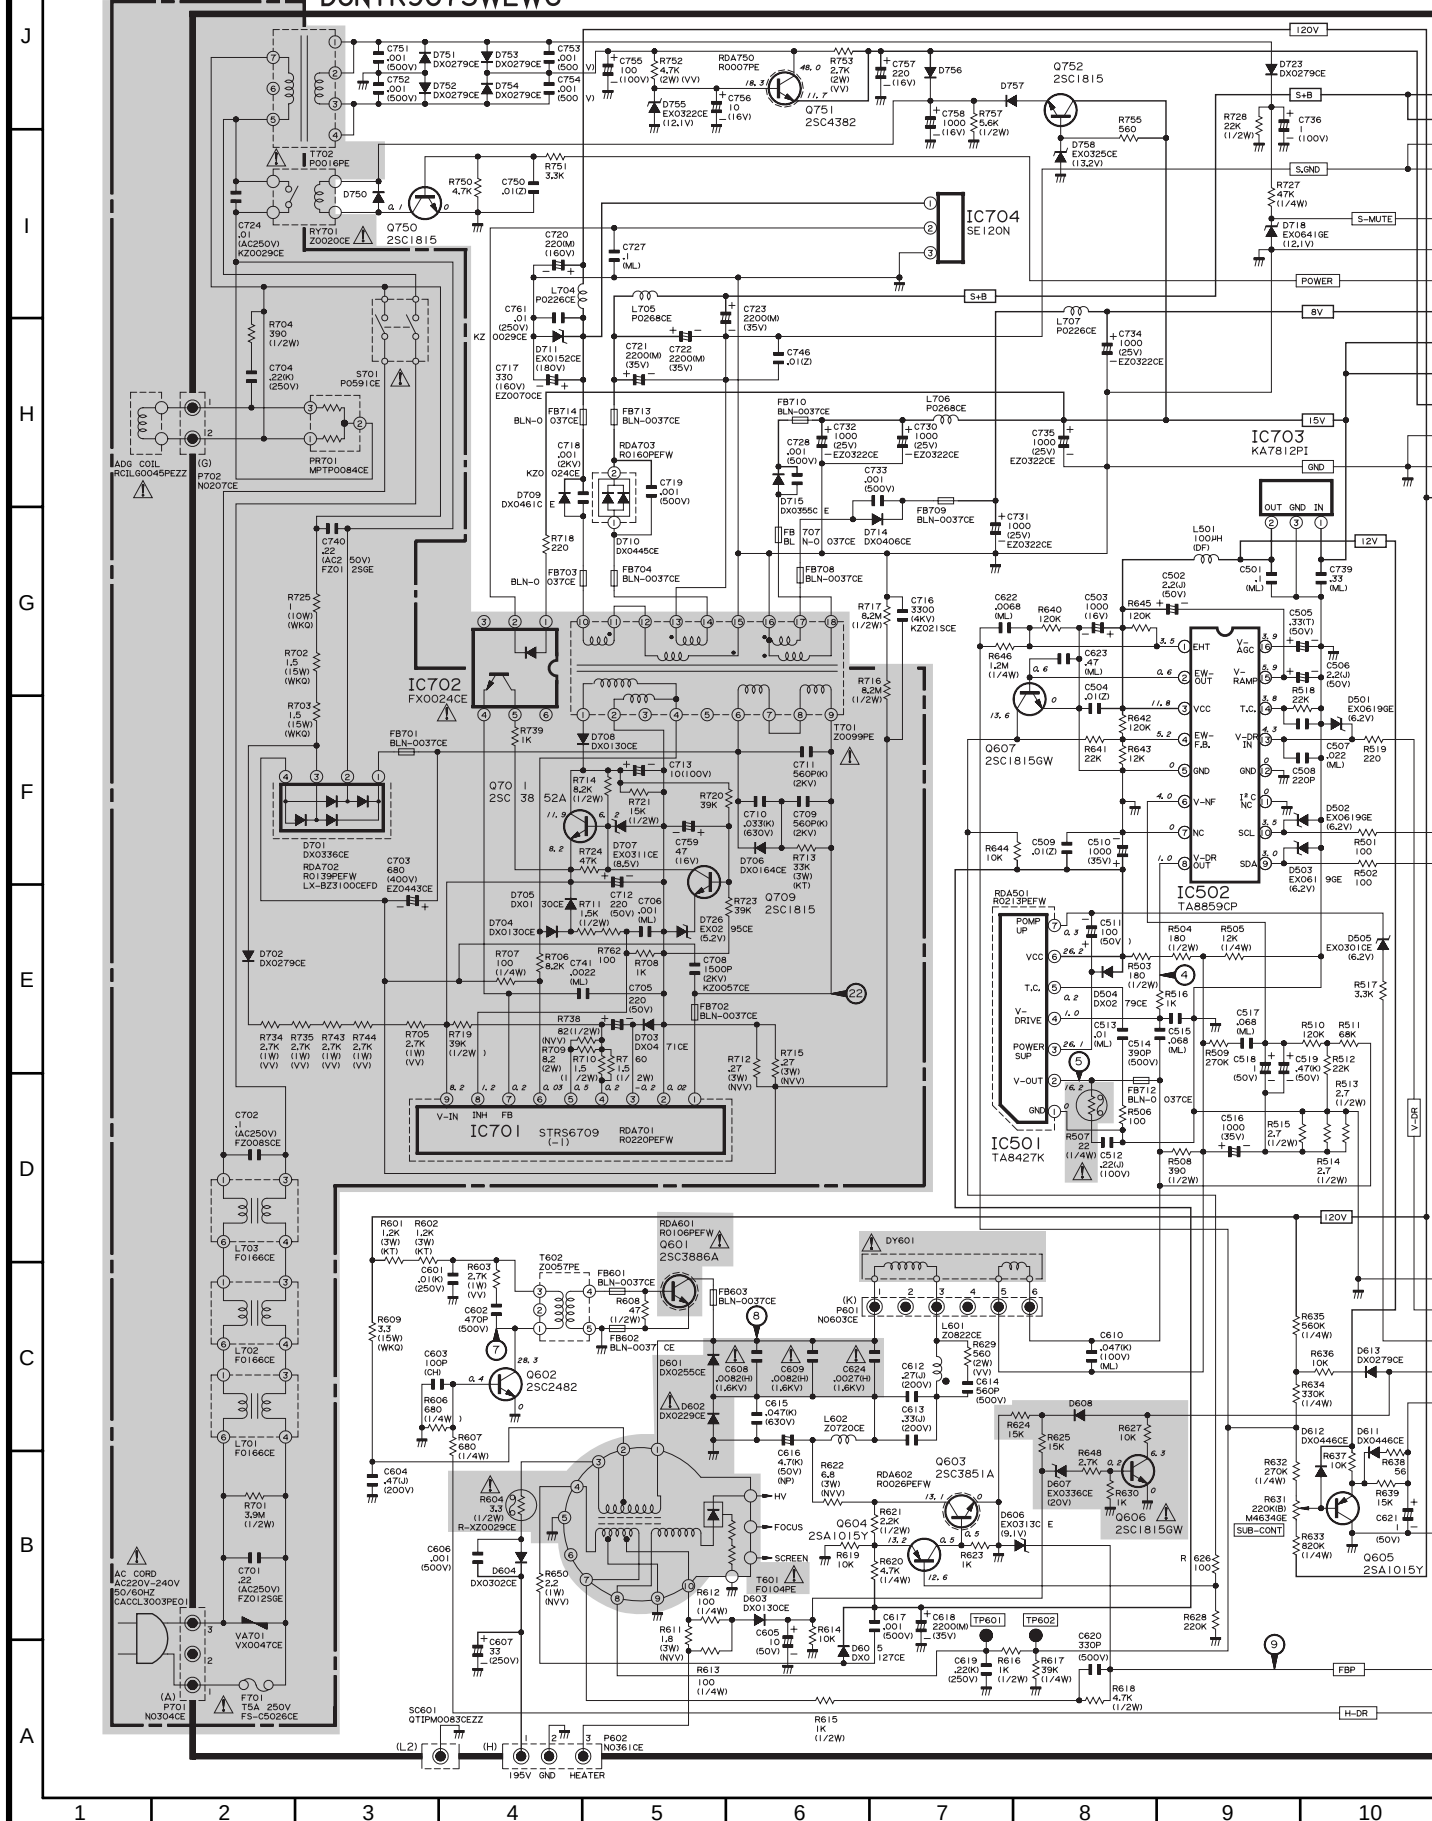


PWB-B (CRT UNIT)
DUNTK8776WEX2



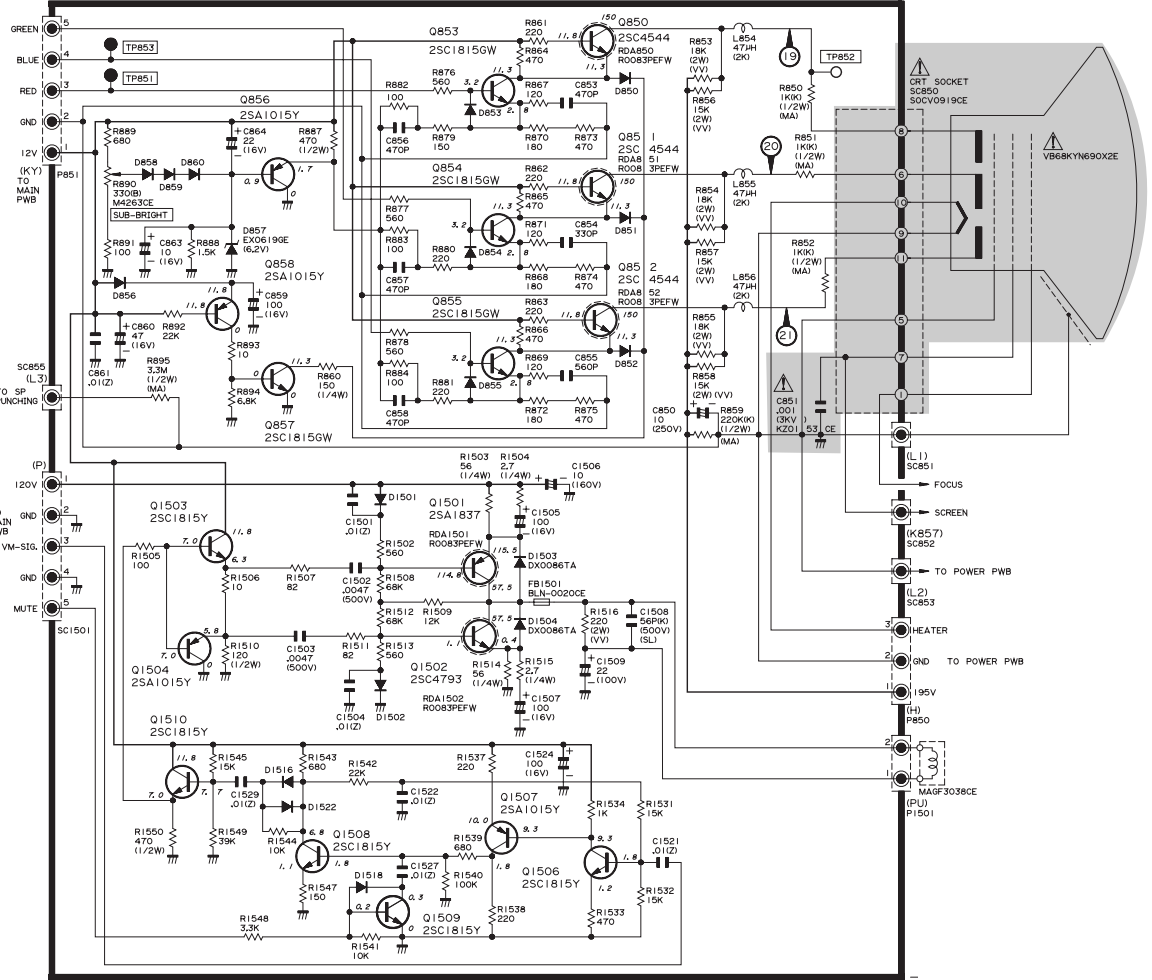


10	11	12	13	14	15	16	17	18	19
----	----	----	----	----	----	----	----	----	----


BLOCK DIAGRAM


MAIN UNIT/IGR UNIT/AV/DIG.-COME UNIT BLOCK DIAGRAM

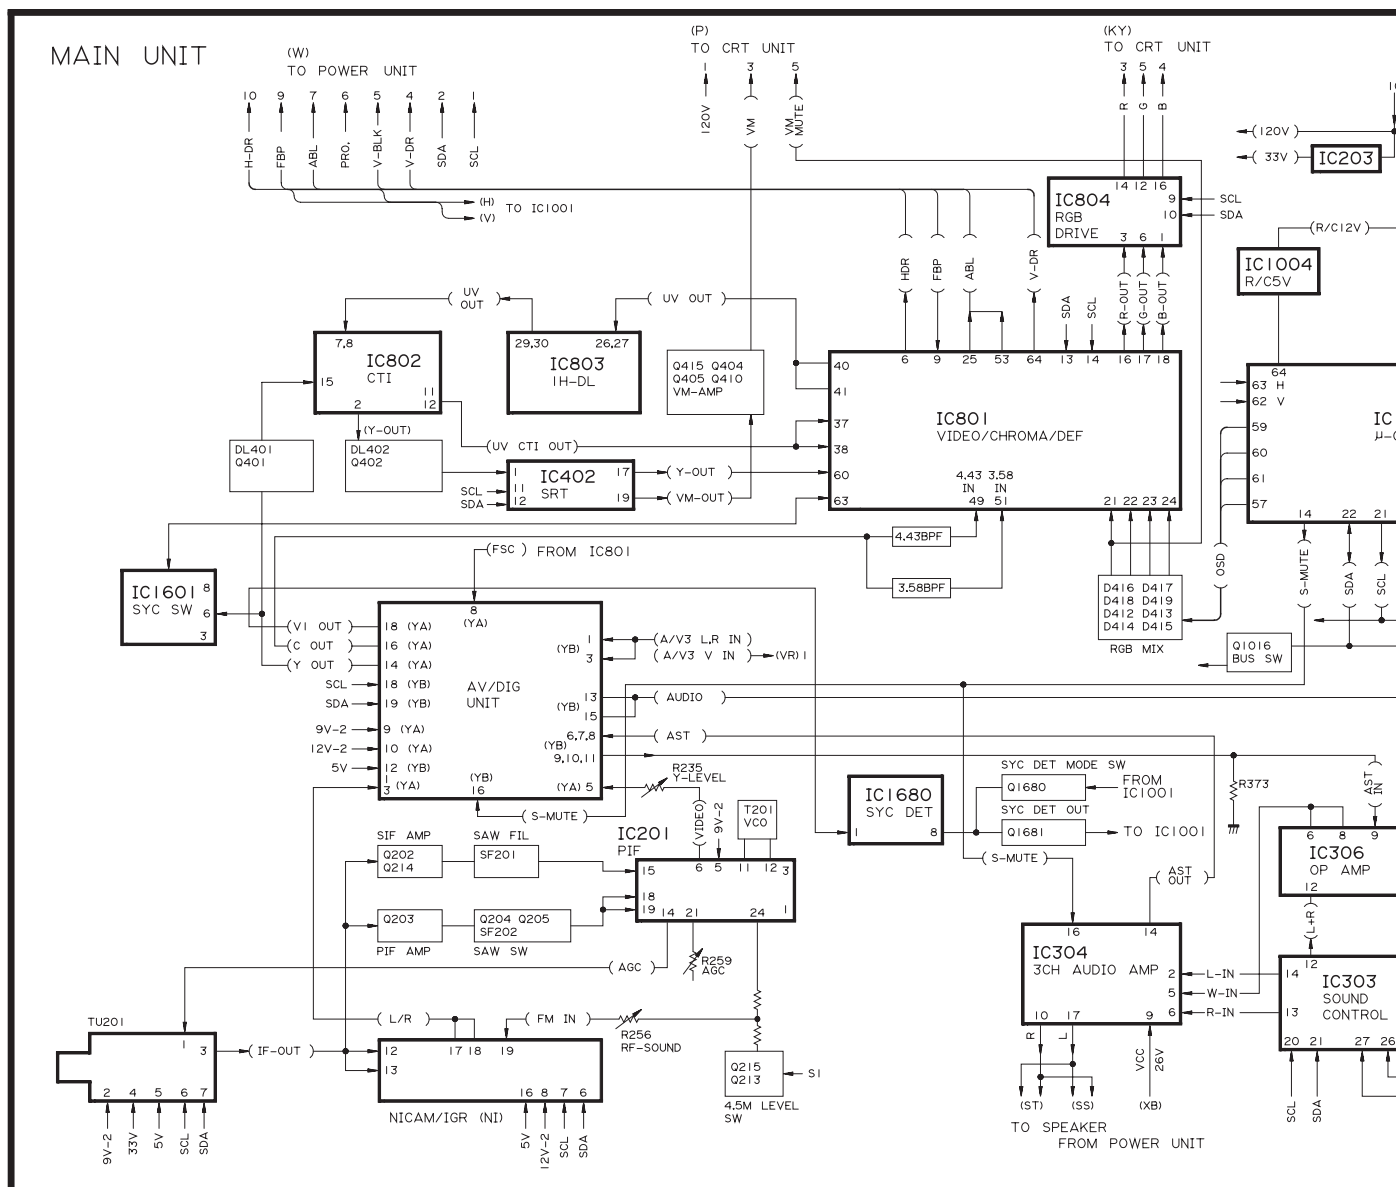

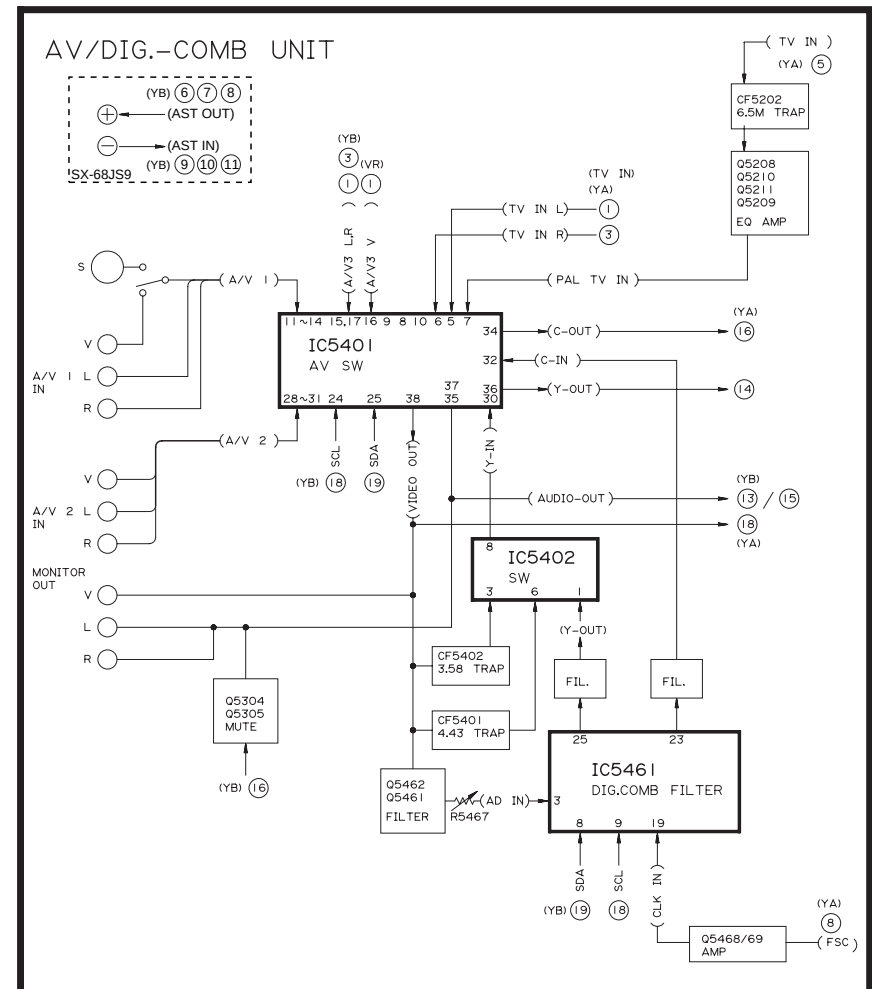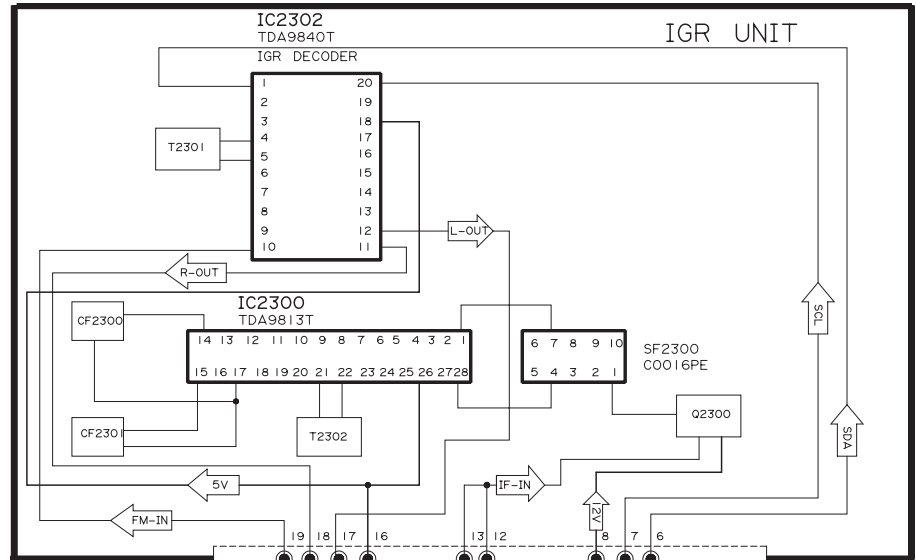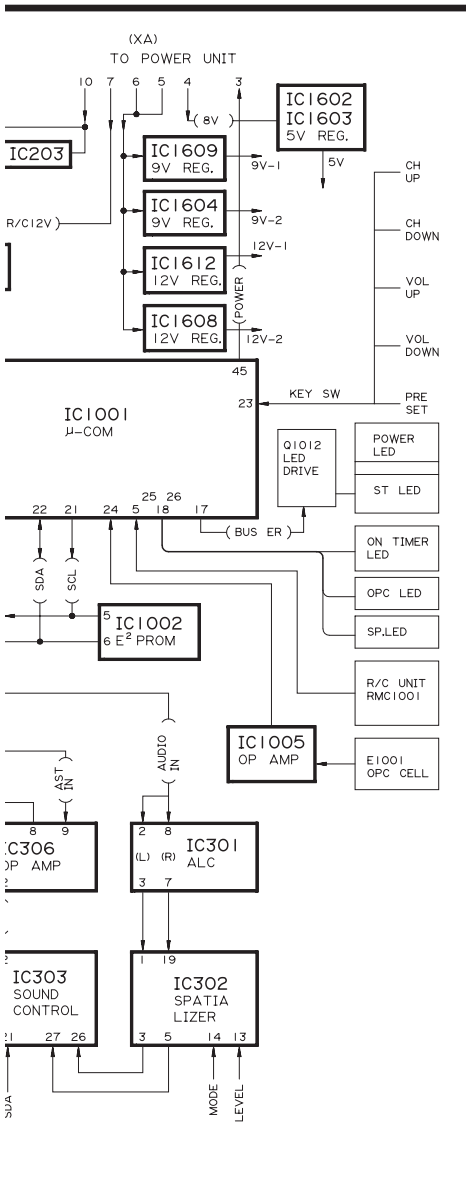



POWER UNIT/CRT UNIT BLOCK DIAGRAM

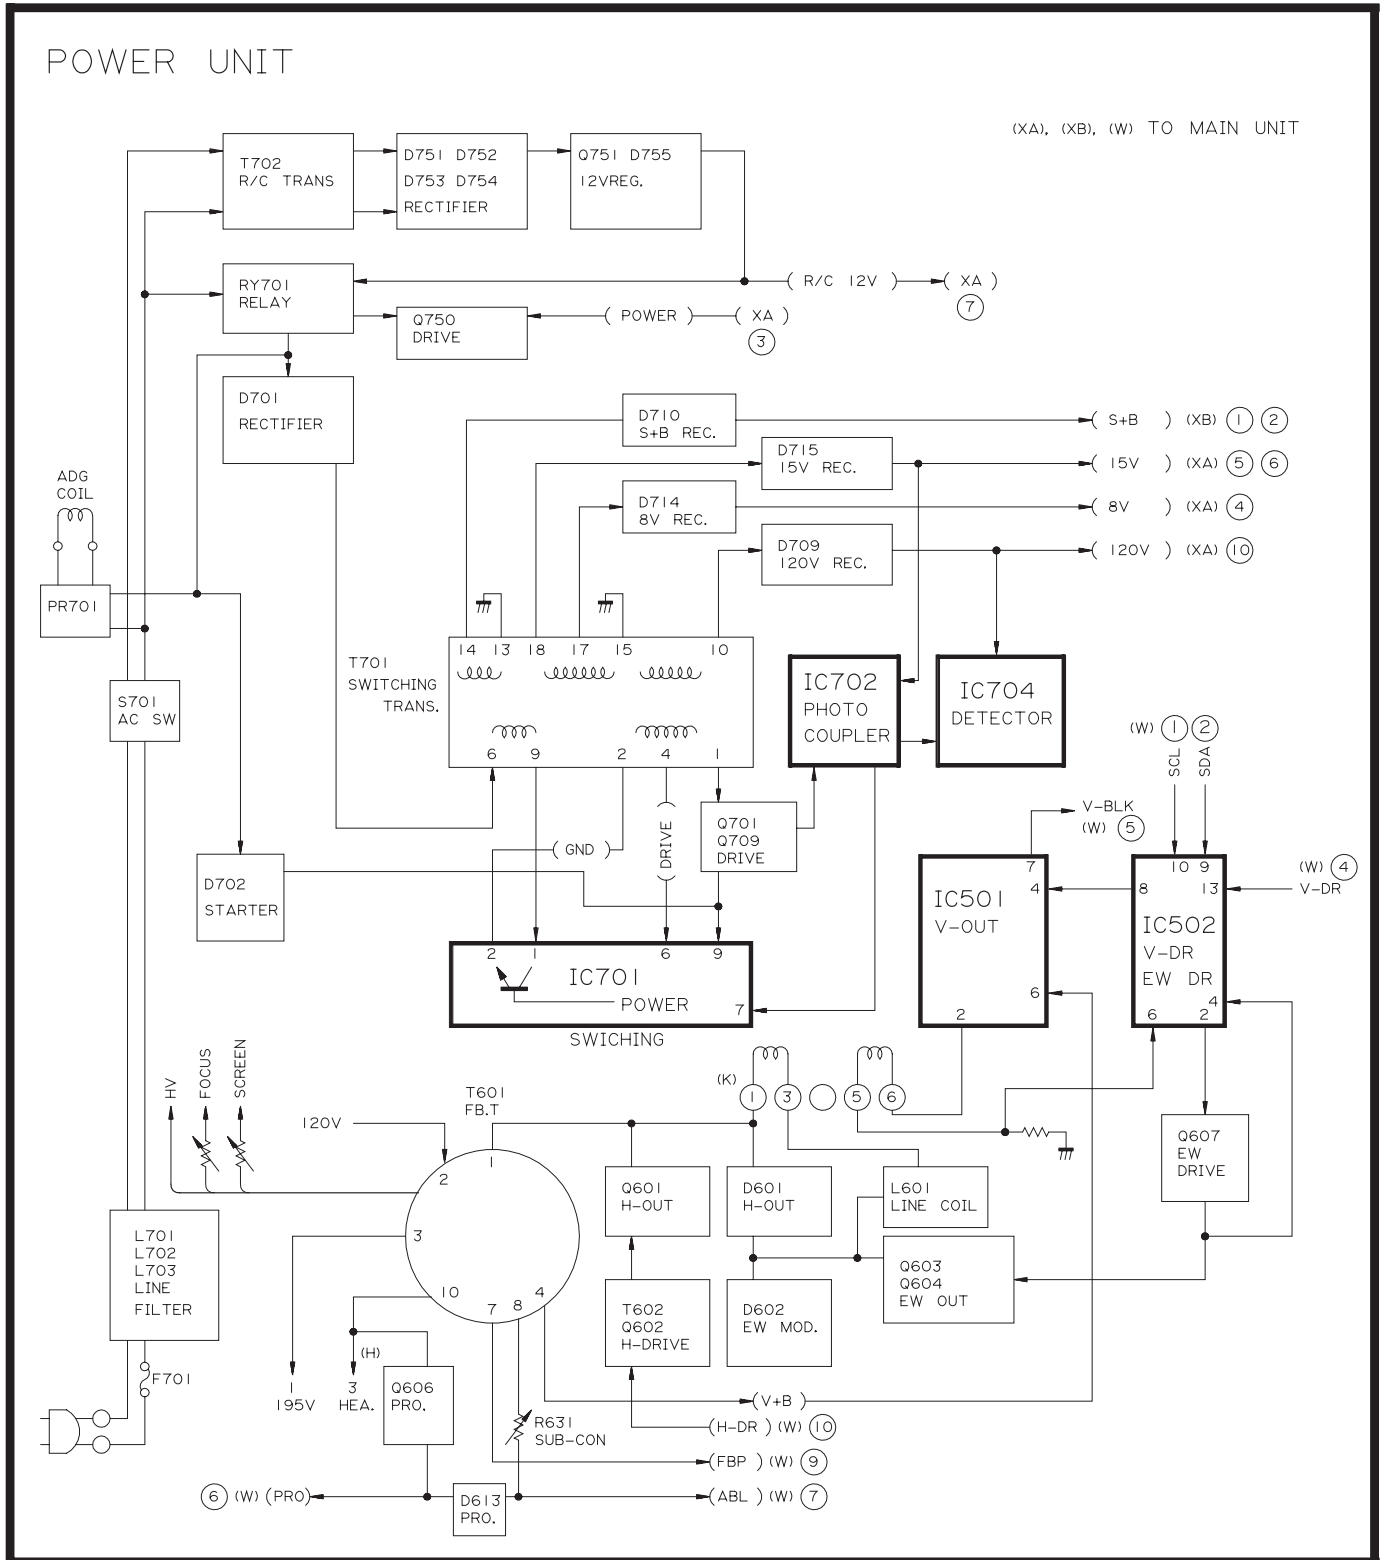

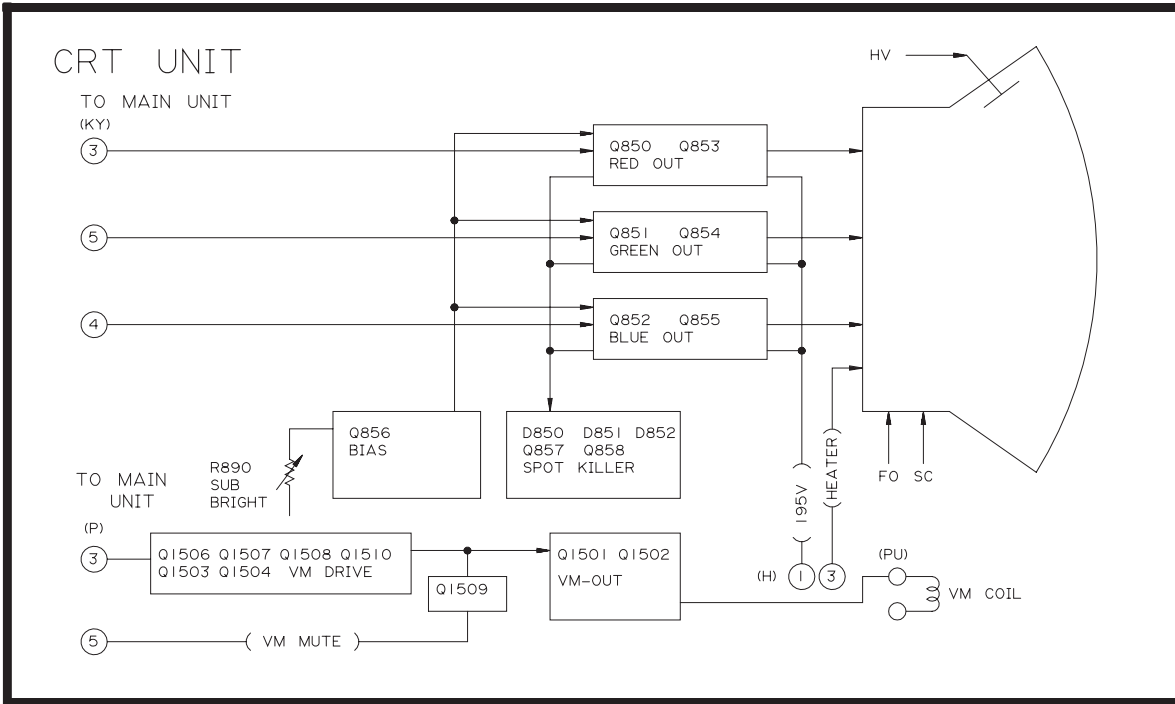




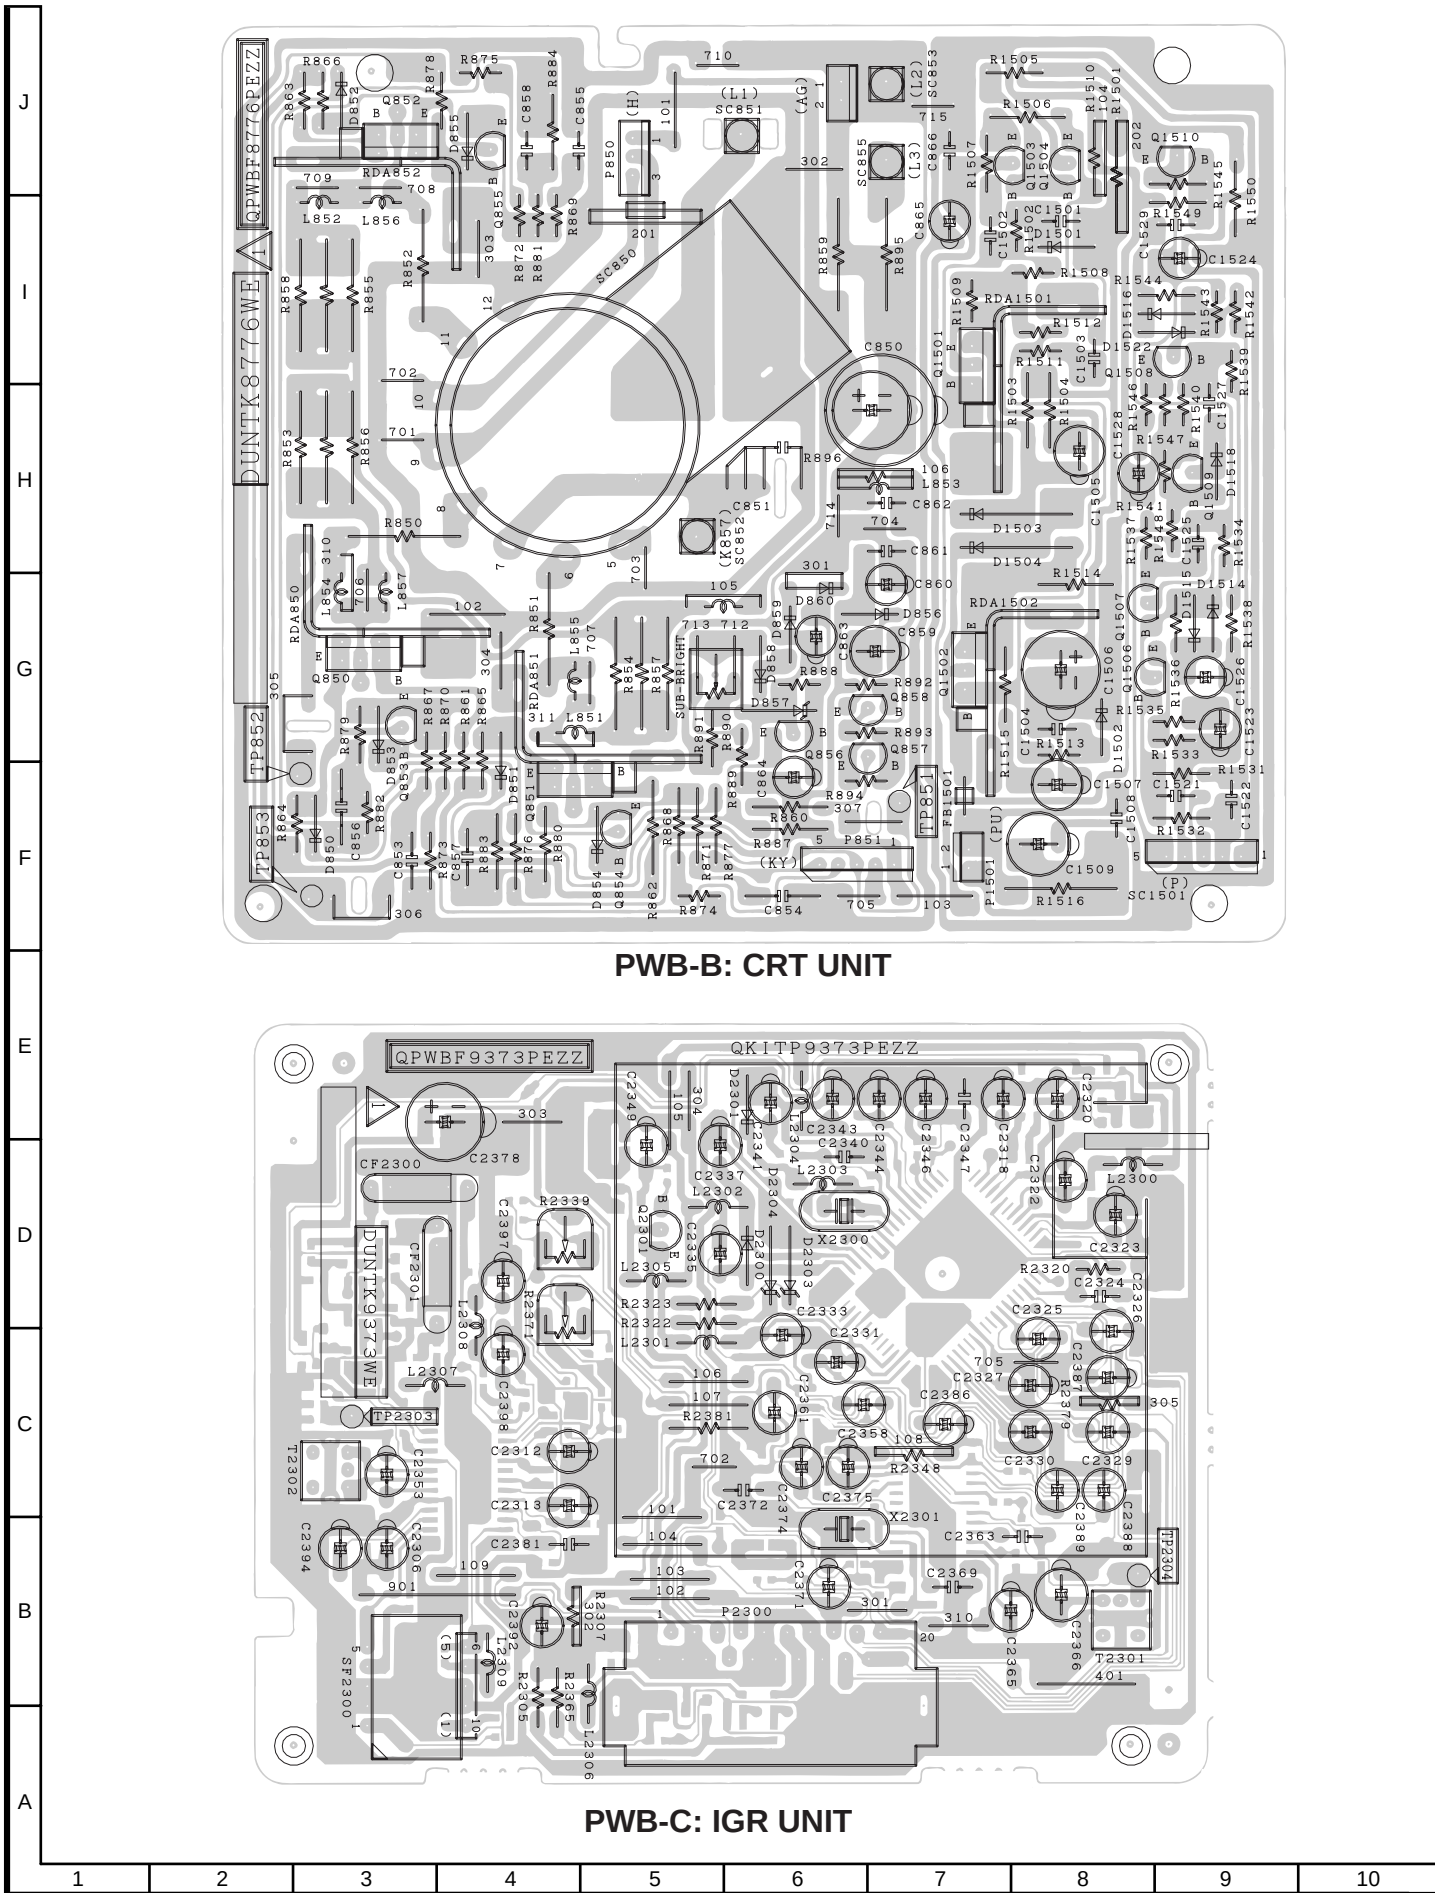

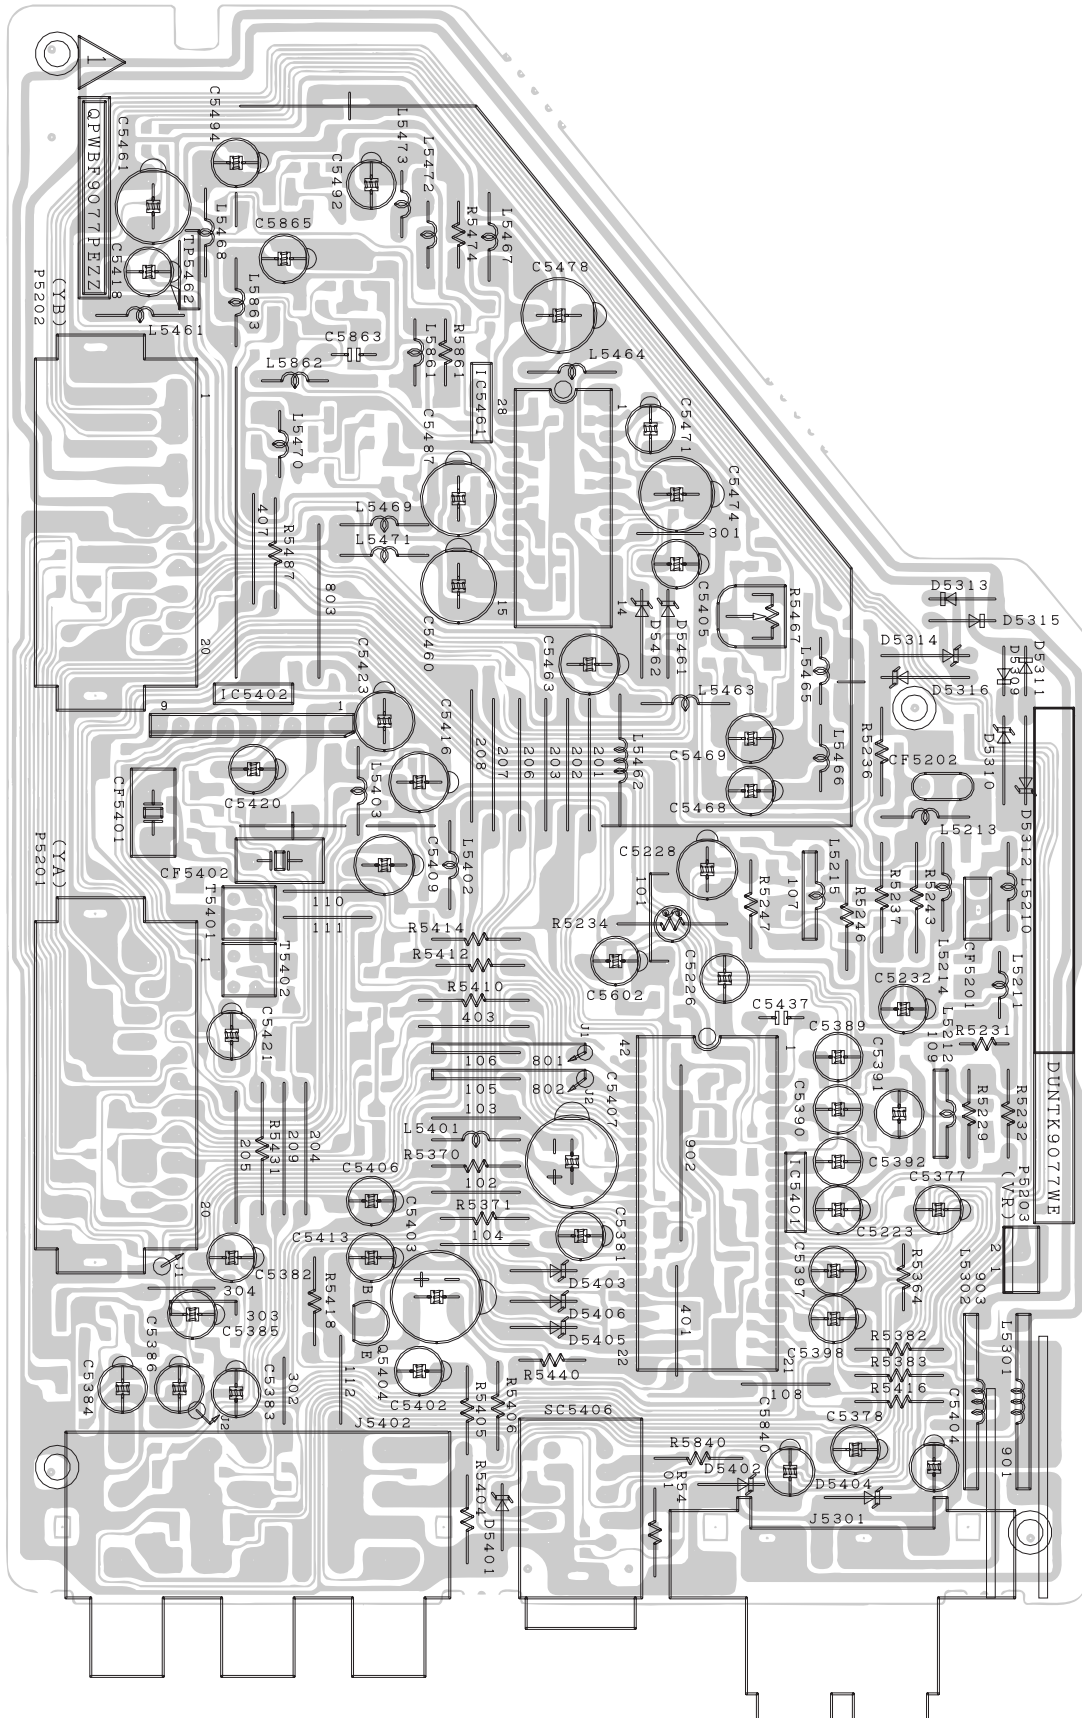

PWB-D: AV/DIG. COMB UNIT

10	11	12	13	14	15	16	17	18	19
----	----	----	----	----	----	----	----	----	----

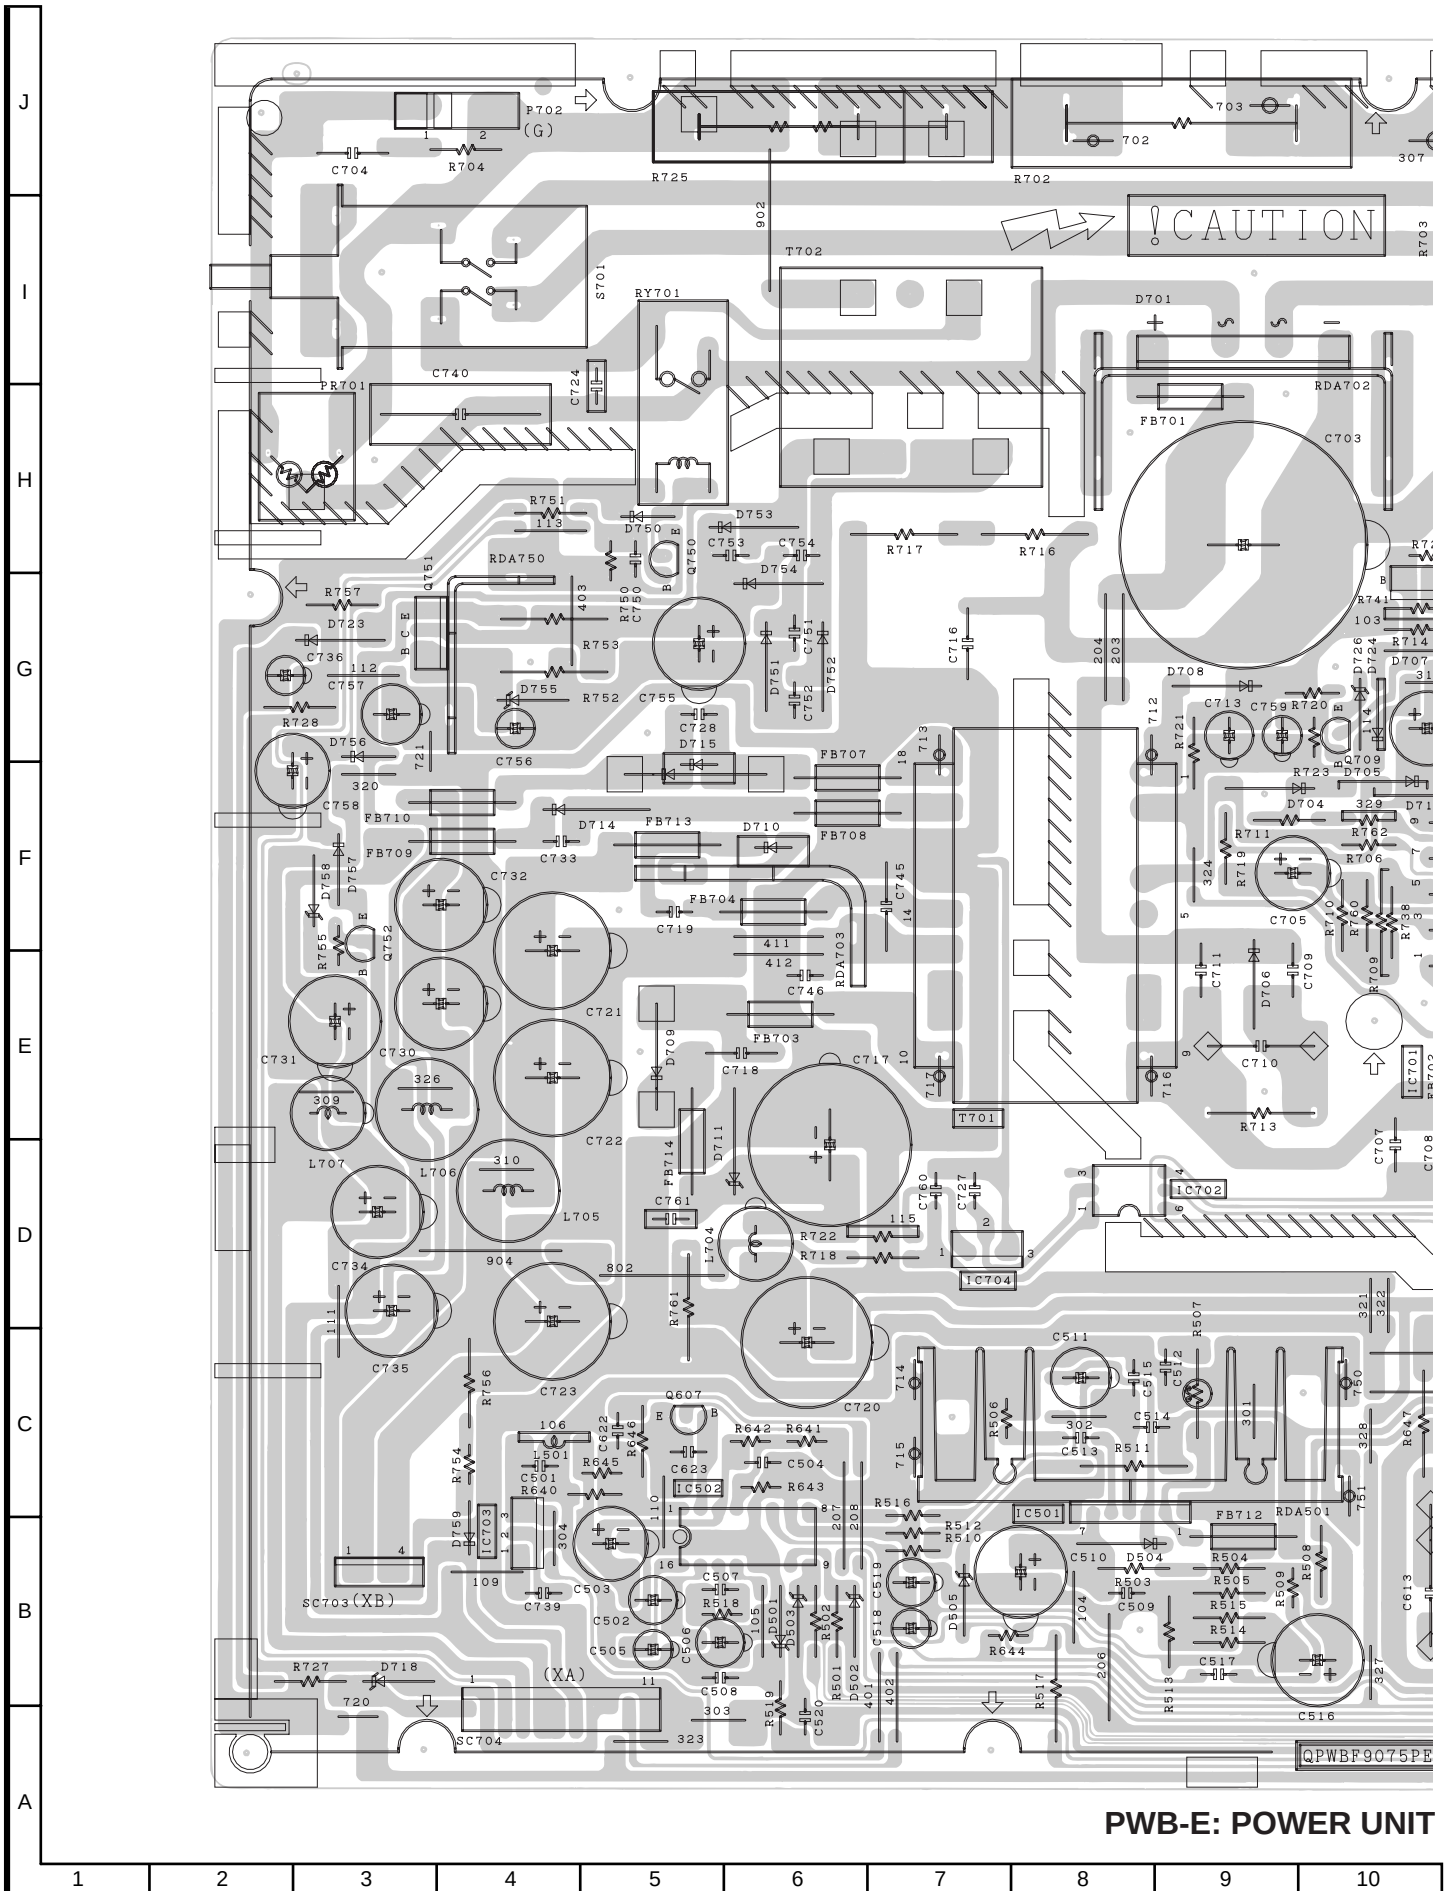

PWB-E: POWER UNIT

PARTS LIST

PARTS REPLACEMENT

Replacement parts which have these special safety characteristics identified in this manual: electrical components having such features are identified by "△" in the Replacement Parts Lists.
The use of a substitute replacement part which does not have the same safety characteristics as the factory recommended replacement parts shown in this service manual may create shock, fire or other hazards.

"HOW TO ORDER REPLACEMENT PARTS"

To have your order filled promptly and correctly, please furnish the following informations.

- | | |
|-----------------|----------------|
| 1. MODEL NUMBER | 2. REF. NO. |
| 3. PART NO. | 4. DESCRIPTION |
| 5. CODE | 6. QUANTITY |

▲ MARK : X-RAY RELATED PARTS

MARK ★: SPARE PARTS-DELIVERY SECTION

Ref. No.	Part No.	★	Description	Code
PICTURE TUBE				
△	VB68KYN690X2E		CRT Ass'y 68cm (29") (With DY and Parity Magnet)	
△	RCiLG0045PEZZ	J	Degaussing (ADG) Coil	AY
	MSPRC0005PEFW	J	CRT Spring	AB
	QEARC2901PEZZ	J	Wire, Grounding Sprap	AK
PRINTED WIRING BOARD ASSEMBLIES (NOT REPLACEMENT ITEM)				
PWB-A	DUNTK9074WEW7	-	Main Unit	—
PWB-B	DUNTK8776WEX2	-	CRT Unit	—
PWB-C	DUNTK9373WEV4	-	IGR Unit	—
PWB-D	DUNTK9077WEW5	-	AV/Dig.-Comb Unit	—
PWB-E	DUNTK9075WEW6	-	Power Unit	—
DUNTK9074WEW7 PWB-A: MAIN UNIT				
TUNER				
NOTE: THE PARTS HERE SHOWN ARE SUPPLIED AS AN ASSEMBLY BUT INDEPENDENTLY.				
△ TU201	VTUVTSR6HHD64/	R	VHF Tuner	BH
INTEGRATED CIRCUITS				
IC304	VHiTA8218AH-1	R	TA8218AH	AP
IC201	VHiLA7565N/-1	R	LA7565N	AQ
IC203	RH-iX0249CEZZ	R	IX0249CE	AE
IC301	VHiBA3308//-1	R	BA3308	AG
IC302	VHiAN7395K/-1	R	AN7395K	AT
IC303	VHiUPC1853C2E	R	UPC1853C	AW
IC306	VHiJNM2058D-1	R	NJM2058D	AG
IC402	VHiTA1226N/-1	R	TA1226N	AW
IC801	RH-iX2652CEN1	R	IX2652CE	BE
IC802	VHiTA8814N/-1	R	TA8814N	AV
IC803	VHiTA8772AN-1	R	TA8772AN	AV
IC804	VHiTA8889AP-1	R	TA8889AP	AR
IC1001	RH-iX3282CEZZ	R	IX3282CE	BD
IC1002	VHiM24C08B/-1	R	M24C08B	AM
IC1003	VHiPST994C/-1	R	PST994C	AD

Ref. No.	Part No.	★	Description	Code
IC1004	VHiUPC78L05-4	R	UPC78L05	AD
IC1005	VHiUPC358C/-1	R	UPC358C	AD
IC1601	VHiTA7348P/-1	R	TA7348P	AK
IC1602	VHiKA7805Pi-1	R	KIA7805PI	AE
IC1603	VHiKA7805Pi-1	R	KIA7805PI	AE
IC1604	VHiKA7809Pi-1	R	KIA7809PI	AE
IC1608	VHiKA7812Pi-1	R	KIA7812PI	AE
IC1609	VHiKA7809Pi-1	R	KIA7809PI	AE
IC1612	VHiKA7812Pi-1	R	KIA7812PI	AE
IC1680	VHiAN5421//-1	R	AN5421	AH
TRANSISTORS				
Q202	VS2SC2735//1E	R	2SC2735	AC
Q203	VS2SC2735//1E	R	2SC2735	AC
Q204	VS2SD601A//1	R	2SD601A	AC
Q206	VS2SC1815GW-1	R	2SC1815GW	AB
Q207	VS2SB709A//1	R	2SB709A	AA
Q208	VS2SD601A//1	R	2SD601A	AC
Q209	VS2SB709A//1	R	2SB709A	AA
Q210	VS2SD601A//1	R	2SD601A	AC
Q211	VS2SD601A//1	R	2SD601A	AC
Q212	VS2SD601A//1	R	2SD601A	AC
Q214	VS2SC2735//1E	R	2SC2735	AC
Q216	VS2SD601A//1	R	2SD601A	AC
Q304	VS2SD601A//1	R	2SD601A	AC
Q305	VS2SD601A//1	R	2SD601A	AC
△ Q306	VS2SD601A//1	R	2SD601A	AC
Q401	VS2SA1015Y/1E	R	2SA1015Y	AC
Q402	VS2SA1015Y/1E	R	2SA1015Y	AC
Q403	VS2SC1815GW-1	R	2SC1815GW	AB
Q404	VS2SA1015Y/1E	R	2SC1815GW	AC
Q405	VS2SK30AG//2E	R	2SK30AG	AD
Q410	VS2SC1815GW-1	R	2SC1815GW	AB
Q412	VS2SC1815GW-1	R	2SC1815GW	AB
Q415	VS2SC1815GW-1	R	2SC1815GW	AB
Q416	VS2SC1815GW-1	R	2SC1815GW	AB
Q801	VS2SD601A//1	R	2SD601A	AC
Q804	VS2SD601A//1	R	2SD601A	AC
Q901	VS2SD601A//1	R	2SD601A	AC
Q1001	VS2SD601A//1	R	2SD601A	AC
Q1002	VS2SD601A//1	R	2SD601A	AC
Q1003	VS2SD601A//1	R	2SD601A	AC
Q1004	VS2SD601A//1	R	2SD601A	AC
Q1005	VS2SD601A//1	R	2SD601A	AC
Q1006	VS2SD601A//1	R	2SD601A	AC
△ Q1007	VS2SB709A//1	R	2SB709A	AA
△ Q1008	VS2SB709A//1	R	2SB709A	AA
Q1009	VS2SD601A//1	R	2SD601A	AC
Q1010	VS2SD601A//1	R	2SD601A	AC
Q1011	VS2SB709A//1	R	2SB709A	AA
Q1012	VS2SD601A//1	R	2SD601A	AC
Q1013	VS2SD601A//1	R	2SD601A	AC
Q1014	VS2SD601A//1	R	2SD601A	AC
Q1015	VS2SD601A//1	R	2SD601A	AC
Q1016	VS2SK583//1	R	2SK583	AE
Q1017	VS2SD601A//1	R	2SD601A	AC
Q1018	VS2SD601A//1	R	2SD601A	AC
△ Q1019	VS2SB709A//1	R	2SB709A	AA
Q1020	VS2SD601A//1	R	2SD601A	AC
Q1601	VS2SD601A//1	R	2SD601A	AC
Q1602	VS2SD601A//1	R	2SD601A	AC
Q1604	VS2SD601A//1	R	2SD601A	AC
Q1605	VS2SD601A//1	R	2SD601A	AC
Q1606	VS2SB709A//1	R	2SB709A	AA
Q1607	VS2SA1015Y/1E	R	2SA1015Y	AC
Q1608	VS2SD601A//1	R	2SD601A	AC
Q1609	VS2SC1815GW-1	R	2SC1815GW	AB
Q1610	VS2SD601A//1	R	2SD601A	AC
Q1680	VS2SD601A//1	R	2SD601A	AC
Q1681	VS2SD601A//1	R	2SD601A	AC
DIODES				
D201	RH-DX0179CEZZ	R	DX0179CE	AA
D202	RH-EX0619GEZZ	R	Zener, EX0619GE	AA
D203	RH-EX0619GEZZ	R	Zener, EX0619GE	AA

Ref. No.	Part No.	★	Description	Code	Ref. No.	Part No.	★	Description	Code
DUNTK9074WEW7									
PWB-A: MAIN UNIT (Continued)									
D206	RH-DX0179CEZZ	R	DX0179CE	AA	D1050	RH-EX0619GEZZ	R	Zener, EX0619GE	AA
D207	VHD1SS119//1E	R	1SS119	AA	D1051	RH-EX0619GEZZ	R	Zener, EX0619GE	AA
D210	VHD1SS119//1E	R	1SS119	AA	D1052	RH-EX0619GEZZ	R	Zener, EX0619GE	AA
D211	VHD1SS119//1E	R	1SS119	AA	D1053	VHD1SS119//1E	R	1SS119	AA
D302	RH-EX0619GEZZ	R	Zener, EX0619GE	AA	D1054	VHD1SS119//1E	R	1SS119	AA
D303	RH-EX0619GEZZ	R	Zener, EX0619GE	AA	D1055	VHD1SS119//1E	R	1SS119	AA
D304	VHD1SS119//1E	R	1SS119	AA	D1056	VHD1SS119//1E	R	1SS119	AA
D305	VHD1SS119//1E	R	1SS119	AA	D1057	VHD1SS119//1E	R	1SS119	AA
D306	VHD1SS119//1E	R	1SS119	AA	D1058	RH-PX0003PEZZ	R	Photo, PX0003PE	AF
D311	VHD1SS119//1E	R	1SS119	AA	D1059	VHD1SS119//1E	R	1SS119	AA
D313	VHD1SS119//1E	R	1SS119	AA	D1061	RH-PX0274CEZZ	R	Photo, PX0274CE	AC
D314	VHD1SS119//1E	R	1SS119	AA	D1062	RH-PX0274CEZZ	R	Photo, PX0274CE	AC
D315	VHD1SS119//1E	R	1SS119	AA	D1063	RH-PX0274CEZZ	R	Photo, PX0274CE	AC
D316	RH-DX0446CEZZ	R	DX0446CE	AB	D1064	RH-EX0310CEZZ	R	Zener, EX0310CE	AA
D318	RH-DX0446CEZZ	R	DX0446CE	AB	D1065	VHD1SS119//1E	R	1SS119	AA
D319	RH-DX0446CEZZ	R	DX0446CE	AB	D1066	VHD1SS119//1E	R	1SS119	AA
D322	RH-EX0670GEZZ	R	Zener, EX0670GE	AA	△ D1067	VHD1SS119//1E	R	1SS119	AA
D323	RH-EX0670GEZZ	R	Zener, EX0670GE	AA	D1601	VHD1SS119//1E	R	1SS119	AA
D326	RH-EX0670GEZZ	R	Zener, EX0670GE	AA	D1602	VHD1SS119//1E	R	1SS119	AA
△ D329	VHD1SS119//1E	R	1SS119	AA	D1603	RH-EX0291CEZZ	R	Zener, EX0291CE	AA
D402	RH-EX0619GEZZ	R	Zener, EX0619GE	AA	D1604	VHD1SS119//1E	R	1SS119	AA
D403	VHD1SS119//1E	R	1SS119	AA	D1605	VHD1SS119//1E	R	1SS119	AA
D407	RH-EX0619GEZZ	R	Zener, EX0619GE	AA	D1606	VHD1SS119//1E	R	1SS119	AA
D410	VHD1SS119//1E	R	1SS119	AA	D1607	RH-EX0281CEZZ	R	Zener, EX0281CE	AA
D411	VHD1SS119//1E	R	1SS119	AA	D1608	RH-EX0313CEZZ	R	Zener, EX0313CE	AA
D416	VHD1SS119//1E	R	1SS119	AA	D1609	VHD1SS119//1E	R	1SS119	AA
D417	VHD1SS119//1E	R	1SS119	AA	D1610	VHD1SS119//1E	R	1SS119	AA
D418	VHD1SS119//1E	R	1SS119	AA	D1611	VHD1SS119//1E	R	1SS119	AA
D419	VHD1SS119//1E	R	1SS119	AA	D1612	VHD1SS119//1E	R	1SS119	AA
D420	VHD1SS119//1E	R	1SS119	AA	D1613	VHD1SS119//1E	R	1SS119	AA
D421	VHD1SS119//1E	R	1SS119	AA	D1614	RH-EX0358GEZZ	R	Zener, EX0358GE	AB
D804	RH-EX0294CEZZ	R	Zener, EX0294CE	AA	D1615	VHD1SS119//1E	R	1SS119	AA
D805	RH-EX0619GEZZ	R	Zener, EX0619GE	AA	D1616	VHD1SS119//1E	R	1SS119	AA
D806	RH-EX0619GEZZ	R	Zener, EX0619GE	AA	D1617	VHD1SS119//1E	R	1SS119	AA
D807	RH-EX0641GEZZ	R	Zener, EX0641GE	AA	D1618	VHD1SS119//1E	R	1SS119	AA
D808	RH-EX0641GEZZ	R	Zener, EX0641GE	AA	D1619	RH-EX0358GEZZ	R	Zener, EX0358GE	AB
D809	RH-EX0641GEZZ	R	Zener, EX0641GE	AA	D1620	VHD1SS119//1E	R	1SS119	AA
D1001	VHD1SS119//1E	R	1SS119	AA	D1621	VHD1SS119//1E	R	1SS119	AA
D1002	VHD1SS119//1E	R	1SS119	AA	D1622	VHD1SS119//1E	R	1SS119	AA
D1003	VHD1SS119//1E	R	1SS119	AA	D1624	VHD1SS119//1E	R	1SS119	AA
D1004	VHD1SS119//1E	R	1SS119	AA	D1625	VHD1SS119//1E	R	1SS119	AA
D1005	RH-EX0619GEZZ	R	Zener, EX0619GE	AA	PACKAGED CIRCUITS				
D1006	RH-EX0619GEZZ	R	Zener, EX0619GE	AA	X801	RCRSB0067CEZZ	R	Crystal, CRSB0067CE	AQ
D1007	RH-EX0619GEZZ	R	Zener, EX0619GE	AA	X802	RCRSB0001PEZZ	R	Crystal, CRSB0001PE	AL
D1008	RH-EX0619GEZZ	R	Zener, EX0619GE	AA	COILS AND FILTERS				
D1009	RH-EX0619GEZZ	R	Zener, EX0619GE	AA	CF201	RFILC0150CEZZ	R	Filter, C0150CE	AF
D1010	RH-EX0619GEZZ	R	Zener, EX0619GE	AA	CF203	RFILC0270CEZZ	R	Filter, C0270CE	AD
D1011	RH-EX0619GEZZ	R	Zener, EX0619GE	AA	CF1001	RFILA0084CEZZ	R	Filter, A0084CE	AE
D1018	RH-EX0619GEZZ	R	Zener, EX0619GE	AA	CF1601	RFILA0034CEZZ	R	Filter, A0034CE	AD
D1019	RH-EX0619GEZZ	R	Zener, EX0619GE	AA	DL401	RCILZ0953CEZZ	R	Coil, Z0953CE	AQ
D1020	VHD1SS119//1E	R	1SS119	AA	DL402	RCILZ0952CEZZ	R	Coil, Z0952CE	AN
D1022	RH-EX0619GEZZ	R	Zener, EX0619GE	AA	L203	VP-DF680K0000	R	Peaking, 68μH	AB
△ D1023	VHD1SS119//1E	R	1SS119	AA	L204	VP-DF270K0000	R	Peaking, 27μH	AB
D1024	RH-EX0619GEZZ	R	Zener, EX0619GE	AA	L206	VP-XF100K0000	R	Peaking, 10μH	AB
D1025	VHD1SS119//1E	R	1SS119	AA	L207	VP-XF1R0K0000	R	Peaking, 1μH	AB
D1026	VHD1SS119//1E	R	1SS119	AA	L208	VP-XF6R8K0000	R	Peaking, 6.8μH	AB
D1027	RH-EX0619GEZZ	R	Zener, EX0619GE	AA	L210	VP-DF560K0000	R	Peaking, 56μH	AB
D1028	VHD1SS119//1E	R	1SS119	AA	L211	VP-DF560K0000	R	Peaking, 56μH	AB
D1029	VHD1SS119//1E	R	1SS119	AA	L230	VP-XF270K0000	R	Peaking, 27μH	AB
D1031	RH-EX0619GEZZ	R	Zener, EX0619GE	AA	L401	VP-XF330K0000	R	Peaking, 33μH	AB
D1036	RH-EX0619GEZZ	R	Zener, EX0619GE	AA	L402	VP-XF560K0000	R	Peaking, 56μH	AB
D1037	RH-EX0619GEZZ	R	Zener, EX0619GE	AA	L403	VP-DF220K0000	R	Peaking, 22μH	AB
D1038	RH-EX0619GEZZ	R	Zener, EX0619GE	AA	L404	VP-DF100K0000	R	Peaking, 10μH	AB
D1039	RH-EX0619GEZZ	R	Zener, EX0619GE	AA	L801	VP-XF180K0000	R	Peaking, 18μH	AB
D1040	RH-EX0619GEZZ	R	Zener, EX0619GE	AA	L802	VP-XF150K0000	R	Peaking, 15μH	AB
D1041	RH-EX0619GEZZ	R	Zener, EX0619GE	AA	L803	VP-DF220K0000	R	Peaking, 22μH	AB
D1042	RH-EX0619GEZZ	R	Zener, EX0619GE	AA	L1001	VP-DF1R0K0000	R	Peaking, 1μH	AB
D1043	RH-EX0619GEZZ	R	Zener, EX0619GE	AA	SF201	RFILC0304CEZZ	R	Filter, C0304CE	AH
D1044	RH-EX0619GEZZ	R	Zener, EX0619GE	AA	SF202	RFILC0399CEZZ	R	Filter, C0399CE	AW
D1045	RH-EX0619GEZZ	R	Zener, EX0619GE	AA	T201	RCILD0237CEZZ	R	Detection Coil	AG
D1048	RH-EX0619GEZZ	R	Zener, EX0619GE	AA	T202	RCILi0543CEZZ	R	IF Coil	AD
D1049	RH-EX0619GEZZ	R	Zener, EX0619GE	AA					

Ref. No.	Part No.	★	Description	Code
DUNTK9074WEW7				
PWB-A: MAIN UNIT (Continued)				
CONTROLS				
R235	RVR-M4620GEZZ	R	1K(B)	AB
R256	RVR-M4622GEZZ	R	2.2K(B), RF-S	AB
R259	RVR-M4627GEZZ	R	15K(B), RF AGC	AC
R1685	RVR-M4622GEZZ	R	2.2K(B), SYC ERQ ADJ	AB
CAPACITORS				
C208	VCKYTV1HF103Z	R	0.01 50V Ceramic	AA
C209	VCEAGA0JW107M	R	100 6.3V Electrolytic	AB
C210	VCKYTV1HF103Z	R	0.01 50V Ceramic	AA
C211	VCEAGA1CW106M	R	10 16V Electrolytic	AA
C212	VCKYTV1HF103Z	R	0.01 50V Ceramic	AA
C213	VCEAGA1CW477M	R	470 16V Electrolytic	AC
C214	VCEAGA1HW106M	R	10 50V Electrolytic	AC
C217	VCKYTV1HB102K	R	1000p 50V Ceramic	AA
C218	VCKYTV1HF103Z	R	0.01 50V Ceramic	AA
C219	VCKYTV1HF103Z	R	0.01 50V Ceramic	AA
C220	VCKYTV1HF103Z	R	0.01 50V Ceramic	AA
C221	VCKYTV1HF103Z	R	0.01 50V Ceramic	AA
C222	VCKYTV1HF103Z	R	0.01 50V Ceramic	AA
C224	VCKYTV1HF103Z	R	0.01 50V Ceramic	AA
C227	VCKYTV1HF103Z	R	0.01 50V Ceramic	AA
C228	VCEAGA1HW105M	R	1 50V Electrolytic	AC
C229	VCKYTV1HF103Z	R	0.01 50V Ceramic	AA
C230	VCEAGA1CW107M	R	100 16V Electrolytic	AB
C232	VCKYTV1HF103Z	R	0.01 50V Ceramic	AA
C233	VCKYTV1HF103Z	R	0.01 50V Ceramic	AA
C234	VCKYTV1HF103Z	R	0.01 50V Ceramic	AA
C235	VCQYTA1HM153J	R	0.015 50V Mylar	AA
C236	VCEAGA1HW105M	R	1 50V Electrolytic	AC
C238	VCQYTA1HM123J	R	0.012 50V Mylar	AA
C240	VCEAGA1CW476M	R	47 16V Electrolytic	AB
C241	VCKYTV1HF103Z	R	0.01 50V Ceramic	AA
C242	VCFYFA1HA474J	R	0.47 50V	AC
C243	VCKYTV1HF103Z	R	0.01 50V Ceramic	AA
C244	VCKYTV1HF103Z	R	0.01 50V Ceramic	AA
C245	VCKYTV1HF103Z	R	0.01 50V Ceramic	AA
C246	VCKYTV1HF103Z	R	0.01 50V Ceramic	AA
C247	VCKYTV1HF103Z	R	0.01 50V Ceramic	AA
C248	VCKYTV1HF103Z	R	0.01 50V Ceramic	AA
C249	VCCCTV1HH2R0D	R	2p 50V Ceramic	AB
C250	VCKYTV1HF103Z	R	0.01 50V Ceramic	AA
C301	VCEAGA1CW107M	R	100 16V Electrolytic	AB
C302	VCEAGA1CW107M	R	100 16V Electrolytic	AB
C303	VCEAGA1CW106M	R	10 16V Electrolytic	AA
C304	VCEAGA1CW106M	R	10 16V Electrolytic	AA
C305	VCEAGA1CW106M	R	10 16V Electrolytic	AA
C306	VCEAGA1CW106M	R	10 16V Electrolytic	AA
C307	VCEAGA1CW226M	R	22 16V Electrolytic	AB
C308	VCEAGA1CW337M	R	330 16V Electrolytic	AC
C309	VCEAGA1CW106M	R	10 16V Electrolytic	AA
C310	VCEAGA1CW106M	R	10 16V Electrolytic	AA
C311	VCQYTA1HM393J	R	0.039 50V Mylar	AA
C312	VCQYTA1HM563J	R	0.056 50V Mylar	AB
C313	VCEAGA1CW107M	R	100 16V Electrolytic	AB
C314	VCEAGA1CW106M	R	10 16V Electrolytic	AA
C315	VCKYTV1HF103Z	R	0.01 50V Ceramic	AA
C316	VCEAGA1CW106M	R	10 16V Electrolytic	AA
C317	VCEAGA1CW226M	R	22 16V Electrolytic	AB
C318	VCEAGA1HW105M	R	1 50V Electrolytic	AC
C319	VCKYTV1HF103Z	R	0.01 50V Ceramic	AA
C320	VCQYTA1HM273J	R	0.027 50V Mylar	AB
C321	VCEAGA1CW107M	R	100 16V Electrolytic	AB
C322	VCEAGA1HW335M	R	3.3 50V Electrolytic	AB
C323	VCEAGA1HW335M	R	3.3 50V Electrolytic	AB
C324	VCEAGA1CW226M	R	22 16V Electrolytic	AB
C325	VCEAGA1CW226M	R	22 16V Electrolytic	AB
C326	VCEAGA1CW226M	R	22 16V Electrolytic	AB
C327	VCEAGA1CW226M	R	22 16V Electrolytic	AB
C328	VCCCTV1HH681J	R	680p 50V Ceramic	AB
C329	VCQYTA1HM823J	R	0.082 50V Mylar	AA

Ref. No.	Part No.	★	Description	Code
C330	VCQYTA1HM104J	R	0.1 50V Mylar	AA
C331	VCQYTA1HM222J	R	2200p 50V Mylar	AA
C332	VCQYTA1HM223J	R	0.022 50V Mylar	AA
C333	VCQYTA1HM223J	R	0.022 50V Mylar	AA
C334	VCQYTA1HM102J	R	1000p 50V Mylar	AA
C335	VCQYTA1HM104J	R	0.1 50V Mylar	AA
C336	VCQYTA1HM104J	R	0.1 50V Mylar	AA
C337	VCQYTA1HM682J	R	6800p 50V Mylar	AB
C338	VCQYTA1HM682J	R	6800p 50V Mylar	AB
C339	VCEAGA1HW225M	R	2.2 50V Electrolytic	AB
C340	VCEAGA1HW225M	R	2.2 50V Electrolytic	AB
C341	VCKYTV1HF103Z	R	0.01 50V Ceramic	AA
C342	VCEAGA1CW108M	R	1000 16V Electrolytic	AD
C343	VCEAGA1VW476M	R	47 35V Electrolytic	AB
C344	VCEAGA1VW476M	R	47 35V Electrolytic	AB
C345	VCFYFA1HA154J	R	0.15 50V	AC
C346	VCFYFA1HA154J	R	0.15 50V	AC
C347	VCEAGA1HW475M	R	4.7 50V Electrolytic	AB
C348	VCEAGA1HW475M	R	4.7 50V Electrolytic	AB
C349	VCQYTA1HM332J	R	3300p 50V Mylar	AA
C350	VCQYTA1HM332J	R	3300p 50V Mylar	AA
C351	VCEAGA1VW337M	R	330 35V Electrolytic	AC
C352	VCFYFA1HA224J	R	0.22 50V	AB
C353	VCEAGA1VW477M	R	470 35V Electrolytic	AD
C354	VCEAGA1VW477M	R	470 35V Electrolytic	AD
C355	VCFYFA1HA224J	R	0.22 50V	AB
C357	VCKYPA1HF103Z	R	0.01 50V Ceramic	AA
C358	VCEAGH1HW108M	R	1000 50V Electrolytic	AE
C359	VCFYAH2AA474J	R	0.47 100V	AG
C360	VCFYAH2AA474J	R	0.47 100V	AG
C365	VCEAGA1VW226M	R	22 35V Electrolytic	AA
C366	VCEAGA1VW476M	R	47 35V Electrolytic	AB
C367	VCEAGA1HW225M	R	2.2 50V Electrolytic	AB
C368	VCFYFA1HA184J	R	0.18 50V	AC
C369	VCQYTA1HM223J	R	0.022 50V Mylar	AA
C370	VCFYFA1HA184J	R	0.18 50V	AC
C371	VCKYTV1HF103Z	R	0.01 50V Ceramic	AA
C372	VCFYFA1HA124J	R	0.12 50V	AC
C373	VCFYFA1HA474J	R	0.47 50V	AC
C374	VCQYTA1HM823J	R	0.082 50V Mylar	AA
C376	VCEAGA1CW337M	R	330 16V Electrolytic	AC
C377	VCEAGA1AW227M	R	220 10V Electrolytic	AB
C378	VCFYFA1HA224J	R	0.22 50V	AB
C379	VCFYFA1HA224J	R	0.22 50V	AB
C380	VCEAGA1VW108M	R	1000 35V Electrolytic	AD
C381	VCEAGA1VW108M	R	1000 35V Electrolytic	AD
C382	VCEAGA1HW105M	R	1 50V Electrolytic	AC
C383	VCFYFA1HA224J	R	0.22 50V	AB
C384	VCFYFA1HA224J	R	0.22 50V	AB
C385	VCEAGA1VW226M	R	22 35V Electrolytic	AA
C386	VCQYTA1HM823J	R	0.082 50V Mylar	AA
C387	VCEAGA1CW106M	R	10 16V Electrolytic	AA
C401	VCEAGA1CW476M	R	47 16V Electrolytic	AB
C402	VCFYFA1HA124J	R	0.12 50V	AC
C403	VCEAGA1CW107M	R	100 16V Electrolytic	AB
C404	VCKYTV1HF103Z	R	0.01 50V Ceramic	AA
C408	VCQYTA1HM104J	R	0.1 50V Mylar	AA
C409	VCEAGA1CW107M	R	100 16V Electrolytic	AB
C410	VCKYTV1HF103Z	R	0.01 50V Ceramic	AA
C411	VCEAGA1CW106M	R	10 16V Electrolytic	AA
C412	VCQYTA1HM104J	R	0.1 50V Mylar	AA
C413	VCKYTV1HF103Z	R	0.01 50V Ceramic	AA
C414	VCCCTV1HH330J	R	33p 50V Ceramic	AA
C415	VCCCTV1HH101J	R	100p 50V Ceramic	AA
C416	VCEAGA1HW224M	R	0.22 50V Electrolytic	AA
C418	VCEAGA1HW225M	R	2.2 50V Electrolytic	AB
C419	VCEAGA1CW106M	R	10 16V Electrolytic	AA
C420	VCEAGA1CW106M	R	10 16V Electrolytic	AA
C432	VCQYTA1HM104J	R	0.1 50V Mylar	AA
C434	VCQYTA1HM104J	R	0.1 50V Mylar	AA
C435	VCQYTA1HM104J	R	0.1 50V Mylar	AA
C436	VCQYTA1HM104J	R	0.1 50V Mylar	AA
C437	VCEAGA1HW475M	R	4.7 50V Electrolytic	AB
C438	VCEAGA1HW105M	R	1 50V Electrolytic	AC
C439	VCEAGA1CW106M	R	10 16V Electrolytic	AA

Ref. No.	Part No.	★	Description	Code	Ref. No.	Part No.	★	Description	Code
DUNTK9074WEW7									
PWB-A: MAIN UNIT (Continued)									
C440	VCKYTV1HF103Z	R 0.01	50V Ceramic	AA	C1011	VCEAGA1HW475M	R 4.7	50V Electrolytic	AB
C441	VCEAGA1CW106M	R 10	16V Electrolytic	AA	C1012	VCEAGA1HW105M	R 1	50V Electrolytic	AC
C442	VCKYTV1HF103Z	R 0.01	50V Ceramic	AA	C1013	VCEAGA1CW106M	R 10	16V Electrolytic	AA
C443	VCEAGA1CW477M	R 470	16V Electrolytic	AC	C1014	VCEAGA1CW106M	R 10	16V Electrolytic	AA
C444	VCEAGA1HW225M	R 2.2	50V Electrolytic	AB	C1015	VCEAGA1AW476M	R 47	10V Electrolytic	AA
C445	VCEAGA1CW106M	R 10	16V Electrolytic	AA	C1016	VCKYTV1HF103Z	R 0.01	50V Ceramic	AA
C446	VCEAGA1HW225M	R 2.2	50V Electrolytic	AB	C1017	VCEAGA0JW107M	R 100	6.3V Electrolytic	AB
C448	VCEAGA1CW337M	R 330	16V Electrolytic	AC	C1018	VCKYTV1HF103Z	R 0.01	50V Ceramic	AA
C450	VCCCTV1HH330J	R 33p	50V Ceramic	AA	C1019	VCEAGA1AW107M	R 100	10V Electrolytic	AB
C451	VCKYTV1HF103Z	R 0.01	50V Ceramic	AA	C1020	VCQYTA1HM473J	R 0.047	50V Mylar	AA
C453	VCCCTV1HH560J	R 56p	50V Ceramic	AA	C1021	VCCCTV1HH560J	R 56p	50V Ceramic	AA
C455	VCEAGA0JW108M	R 1000	6.3V Electrolytic	AC	C1022	VCKYTV1HF103Z	R 0.01	50V Ceramic	AA
C456	VCEAGA1CW106M	R 10	16V Electrolytic	AA	C1023	VCKYTV1HF103Z	R 0.01	50V Ceramic	AA
C801	VCKYTV1HF103Z	R 0.01	50V Ceramic	AA	C1024	VCKYTV1HF103Z	R 0.01	50V Ceramic	AA
C802	VCEAGA1CW107M	R 100	16V Electrolytic	AB	C1025	VCKYTV1HF103Z	R 0.01	50V Ceramic	AA
C803	VCFYFA1HA124J	R 0.12	50V	AC	C1026	VCKYTV1HF103Z	R 0.01	50V Ceramic	AA
C804	VCKYTV1HF103Z	R 0.01	50V Ceramic	AA	C1027	VCKYTV1HF103Z	R 0.01	50V Ceramic	AA
C805	VCKYTV1HF103Z	R 0.01	50V Ceramic	AA	C1029	VCKYPA1HF103Z	R 0.01	50V Ceramic	AA
C806	VCKYTV1HF103Z	R 0.01	50V Ceramic	AA	C1030	VCKYPA1HF103Z	R 0.01	50V Ceramic	AA
C807	VCEAGA1CW337M	R 330	16V Electrolytic	AC	C1031	VCCCTV1HH220J	R 22p	50V Ceramic	AA
C808	VCQYTA1HM103J	R 0.01	50V Mylar	AA	△ C1032	VCEAGA1CW106M	R 10	16V Electrolytic	AA
C809	VCEAGA1HW225M	R 2.2	50V Electrolytic	AB	C1601	VCEAGA1EW227M	R 220	25V Electrolytic	AC
C810	VCKYTV1HF103Z	R 0.01	50V Ceramic	AA	C1602	VCEAGA1CW227M	R 220	16V Electrolytic	AC
C811	VCQYTA1HM104J	R 0.1	50V Mylar	AA	C1604	VCEAGA1CW106M	R 10	16V Electrolytic	AA
C812	VCQYTA1HM104J	R 0.1	50V Mylar	AA	C1605	VCEAGA1CW106M	R 10	16V Electrolytic	AA
C813	VCQYTA1HM223J	R 0.022	50V Mylar	AA	C1606	VCKYTV1HF103Z	R 0.01	50V Ceramic	AA
C814	VCCCTV1HH120J	R 12p	50V Ceramic	AA	C1607	VCKYTV1HF103Z	R 0.01	50V Ceramic	AA
C815	VCCCTV1HH100D	R 10p	50V Ceramic	AA	C1608	VCEAGA1CW106M	R 10	16V Electrolytic	AA
C816	VCQYTA1HM223J	R 0.022	50V Mylar	AA	C1609	VCKYTV1HF103Z	R 0.01	50V Ceramic	AA
C817	VCCCPA1HH220J	R 22p	50V Ceramic	AA	C1610	VCEAGA1CW476M	R 47	16V Electrolytic	AB
C818	VCCCTV1HH390J	R 39p	50V Ceramic	AA	C1611	VCCCTV1HH221J	R 220p	50V Ceramic	AA
C821	VCCCTV1HH330J	R 33p	50V Ceramic	AA	C1612	VCEAGA1CW227M	R 220	16V Electrolytic	AC
C822	VCKYTV1HF103Z	R 0.01	50V Ceramic	AA	C1613	VCEAGA1CW107M	R 100	16V Electrolytic	AB
C823	VCQYTA1HM104J	R 0.1	50V Mylar	AA	C1614	VCEAGA1CW227M	R 220	16V Electrolytic	AC
C824	VCEAGA1HW105M	R 1	50V Electrolytic	AC	C1615	VCEAGA1CW107M	R 100	16V Electrolytic	AB
C825	VCCCTV1HH220J	R 22p	50V Ceramic	AA	C1616	VCQYTA1HM473J	R 0.047	50V Mylar	AA
C827	VCQYTA1HM104J	R 0.1	50V Mylar	AA	C1617	VCEAGA1HW225M	R 2.2	50V Electrolytic	AB
C828	VCQYTA1HM104J	R 0.1	50V Mylar	AA	C1618	VCQYTA1HM153J	R 0.015	50V Mylar	AA
C829	VCQYTA1HM104J	R 0.1	50V Mylar	AA	C1619	VCKYTV1HF103Z	R 0.01	50V Ceramic	AA
C830	VCQYTA1HM104J	R 0.1	50V Mylar	AA	C1620	VCQYTA1HM104J	R 0.1	50V Mylar	AA
C831	VCQYTA1HM104J	R 0.1	50V Mylar	AA	C1621	VCEAGA1CW337M	R 330	16V Electrolytic	AC
C832	VCEAGA1HW105M	R 1	50V Electrolytic	AC	C1622	VCQYTA1HM103J	R 0.01	50V Mylar	AA
C833	VCEAGA1HW225M	R 2.2	50V Electrolytic	AB	C1623	VCQYTA1HM103J	R 0.01	50V Mylar	AA
C834	VCEAGA1HW225M	R 2.2	50V Electrolytic	AB	C1624	VCEAGA1HW105M	R 1	50V Electrolytic	AC
C835	VCEAGA1CW107M	R 100	16V Electrolytic	AB	C1625	VCEAGA1HW105M	R 1	50V Electrolytic	AC
C836	VCKYTV1HF103Z	R 0.01	50V Ceramic	AA	C1626	VCEAGA1CW476M	R 47	16V Electrolytic	AB
C837	VCEAGA1HW474M	R 0.47	50V Electrolytic	AA	C1627	VCEAGA1EW227M	R 220	25V Electrolytic	AC
C838	VCEAGA1CW106M	R 10	16V Electrolytic	AA	C1628	VCEAGA1CW227M	R 220	16V Electrolytic	AC
C839	VCQYTA1HM104J	R 0.1	50V Mylar	AA	C1629	VCEAGA1CW227M	R 220	16V Electrolytic	AC
C840	VCQYTA1HM104J	R 0.1	50V Mylar	AA	C1630	VCEAGA1EW227M	R 220	25V Electrolytic	AC
C841	VCCCTV1HH470J	R 47p	50V Ceramic	AA	C1631	VCEAGA1CW227M	R 220	16V Electrolytic	AC
C842	VCCCTV1HH470J	R 47p	50V Ceramic	AA	C1632	VCEAGA1EW227M	R 220	25V Electrolytic	AC
C843	VCCCTV1HH470J	R 47p	50V Ceramic	AA	C1633	VCEAGA1HW105M	R 1	50V Electrolytic	AC
C844	VCQYTA1HM104J	R 0.1	50V Mylar	AA	C1634	VCEAGA1HW475M	R 4.7	50V Electrolytic	AB
C845	VCEAGA1HW105M	R 1	50V Electrolytic	AC	C1680	VCEAGA1CW106M	R 10	16V Electrolytic	AA
C846	VCEAGA1HW474M	R 0.47	50V Electrolytic	AA	C1681	VCQYTA1HM392J	R 3900p	50V Mylar	AA
C847	VCQYTA1HM104J	R 0.1	50V Mylar	AA	C1682	VCQYTA1HM103J	R 0.01	50V Mylar	AA
C849	VCKYTV1HF103Z	R 0.01	50V Ceramic	AA	C1683	VCQYTA1HM103J	R 0.01	50V Mylar	AA
C901	VCEAGA1HW105M	R 1	50V Electrolytic	AC	C1684	VCQYTA1HM272J	R 2700p	50V Mylar	AA
C909	VCKYTV1HF103Z	R 0.01	50V Ceramic	AA	C1685	VCEAGA1HW105M	R 1	50V Electrolytic	AC
C910	VCQYTA1HM104J	R 0.1	50V Mylar	AA	C1686	VCQYTA1HM103J	R 0.01	50V Mylar	AA
C911	VCEAGA1CW337M	R 330	16V Electrolytic	AC	C1687	VCEAGA1HW105M	R 1	50V Electrolytic	AC
C1001	VCEAGA1CW107M	R 100	16V Electrolytic	AB	C1688	VCEAGA1HW225M	R 2.2	50V Electrolytic	AB
C1002	VCEAGA1CW107M	R 100	16V Electrolytic	AB	C1689	VCEAGA1CW106M	R 10	16V Electrolytic	AA
C1003	VCEAGA1CW107M	R 100	16V Electrolytic	AB	C2801	VCCCTV1HH330J	R 33p	50V Ceramic	AA
C1004	VCCCTV1HH220J	R 22p	50V Ceramic	AA	C2802	VCEAGA1CW107M	R 100	16V Electrolytic	AB
C1005	VCCCTV1HH220J	R 22p	50V Ceramic	AA	C2803	VCKYTV1HF103Z	R 0.01	50V Ceramic	AA
C1006	VCCCTV1HH220J	R 22p	50V Ceramic	AA	C2804	VCEAGA1CW226M	R 22	16V Electrolytic	AB
C1007	VCCCTV1HH560J	R 56p	50V Ceramic	AA	C2805	VCQYTA1HM104J	R 0.1	50V Mylar	AA
C1008	VCEAGA1AW107M	R 100	10V Electrolytic	AB	C2806	VCQYTA1HM104J	R 0.1	50V Mylar	AA
C1009	VCKYTV1HF103Z	R 0.01	50V Ceramic	AA	C2808	VCEAGA1HW105M	R 1	50V Electrolytic	AC
△ C1010	VCEAGA1CW476M	R 47	16V Electrolytic	AB	C2810	VCEAGA1HW105M	R 1	50V Electrolytic	AC
					C2811	VCKYTV1HF103Z	R 0.01	50V Ceramic	AA
					C2816	VCKYTV1HF103Z	R 0.01	50V Ceramic	AA
					C2817	VCEAGA1CW477M	R 470	16V Electrolytic	AC

Ref. No.	Part No.	★	Description	Code
DUNTK9074WEW7				
PWB-A: MAIN UNIT (Continued)				
C2818	VCQYTA1HM104J	R 0.1	50V Mylar	AA
C2819	VCEAGA1HW474M	R 0.47	50V Electrolytic	AA
RESISTORS				
R201	VRS-VV3DB153J	R 15k	2W Metal Oxide	AA
R207	VRD-RA2EE221J	R 220	1/4W Carbon	AA
R208	VRS-TV1JD562J	R 5.6k	1/16W Metal Oxide	AA
R209	VRS-TV1JD222J	R 2.2k	1/16W Metal Oxide	AA
R210	VRS-TV1JD121J	R 120	1/16W Metal Oxide	AA
R211	VRS-TV1JD271J	R 270	1/16W Metal Oxide	AA
R212	VRS-TV1JD560J	R 56	1/16W Metal Oxide	AA
R213	VRS-TV1JD151J	R 150	1/16W Metal Oxide	AA
R215	VRD-RA2BE680J	R 68	1/8W Carbon	AA
R216	VRD-RA2BE680J	R 68	1/8W Carbon	AA
R217	VRS-TV1JD151J	R 150	1/16W Metal Oxide	AA
R218	VRS-TV1JD562J	R 5.6k	1/16W Metal Oxide	AA
R219	VRS-TV1JD152J	R 1.5k	1/16W Metal Oxide	AA
R220	VRS-TV1JD332J	R 3.3k	1/16W Metal Oxide	AA
R221	VRS-TV1JD330J	R 33	1/16W Metal Oxide	AA
R232	VRD-RM2HD471J	R 470	1/2W Carbon	AA
R233	VRD-RA2BE561J	R 560	1/8W Carbon	AA
R234	VRS-TV1JD102J	R 1k	1/16W Metal Oxide	AA
R236	VRS-TV1JD561J	R 560	1/16W Metal Oxide	AA
R237	VRS-TV1JD221J	R 220	1/16W Metal Oxide	AA
R238	VRS-TV1JD151J	R 150	1/16W Metal Oxide	AA
R239	VRS-TV1JD103J	R 10k	1/16W Metal Oxide	AA
R240	VRS-TV1JD103J	R 10k	1/16W Metal Oxide	AA
R241	VRS-TV1JD103J	R 10k	1/16W Metal Oxide	AA
R242	VRS-TV1JD101J	R 100	1/16W Metal Oxide	AA
R244	VRS-TV1JD561J	R 560	1/16W Metal Oxide	AA
R254	VRS-TV1JD222J	R 2.2k	1/16W Metal Oxide	AA
R255	VRS-TV1JD222J	R 2.2k	1/16W Metal Oxide	AA
R258	VRS-TV1JD102J	R 1k	1/16W Metal Oxide	AA
R260	VRS-TV1JD472J	R 4.7k	1/16W Metal Oxide	AA
R261	VRS-TV1JD102J	R 1k	1/16W Metal Oxide	AA
R262	VRS-TV1JD473J	R 47k	1/16W Metal Oxide	AA
R263	VRS-TV1JD473J	R 47k	1/16W Metal Oxide	AA
R265	VRS-TV1JD473J	R 47k	1/16W Metal Oxide	AA
R266	VRS-TV1JD333J	R 33k	1/16W Metal Oxide	AA
R267	VRS-TV1JD222J	R 2.2k	1/16W Metal Oxide	AA
R268	VRS-TV1JD102J	R 1k	1/16W Metal Oxide	AA
R269	VRS-TV1JD472J	R 4.7k	1/16W Metal Oxide	AA
R270	VRS-TV1JD332J	R 3.3k	1/16W Metal Oxide	AA
R271	VRS-TV1JD393J	R 39k	1/16W Metal Oxide	AA
R272	VRS-TV1JD393J	R 39k	1/16W Metal Oxide	AA
R273	VRS-TV1JD682J	R 6.8k	1/16W Metal Oxide	AA
R274	VRS-TV1JD561J	R 560	1/16W Metal Oxide	AA
R275	VRS-TV1JD562J	R 5.6k	1/16W Metal Oxide	AA
R276	VRS-TV1JD222J	R 2.2k	1/16W Metal Oxide	AA
R277	VRS-TV1JD271J	R 270	1/16W Metal Oxide	AA
R278	VRS-TV1JD6R8J	R 6.8	1/16W Metal Oxide	AA
R279	VRS-TV1JD151J	R 150	1/16W Metal Oxide	AA
R280	VRS-TV1JD681J	R 680	1/16W Metal Oxide	AA
R281	VRS-TV1JD151J	R 150	1/16W Metal Oxide	AA
R282	VRS-TV1JD223J	R 22k	1/16W Metal Oxide	AA
R283	VRS-TV1JD222J	R 2.2k	1/16W Metal Oxide	AA
R284	VRS-TV1JD222J	R 2.2k	1/16W Metal Oxide	AA
R287	VRS-TV1JD223J	R 22k	1/16W Metal Oxide	AA
R290	VRS-TV1JD272J	R 2.7k	1/16W Metal Oxide	AA
R291	VRS-TV1JD272J	R 2.7k	1/16W Metal Oxide	AA
R292	VRS-TV1JD683J	R 68k	1/16W Metal Oxide	AA
R293	VRS-TV1JD222J	R 2.2k	1/16W Metal Oxide	AA
R294	VRS-TV1JD102J	R 1k	1/16W Metal Oxide	AA
R295	VRS-TV1JD564J	R 560k	1/16W Metal Oxide	AA
R296	VRS-TV1JD152J	R 1.5k	1/16W Metal Oxide	AA
R297	VRS-TV1JD682J	R 6.8k	1/16W Metal Oxide	AA
R298	VRS-TV1JD223J	R 22k	1/16W Metal Oxide	AA
R299	VRS-TV1JD223J	R 22k	1/16W Metal Oxide	AA
R301	VRS-TV1JD102J	R 1k	1/16W Metal Oxide	AA
R302	VRS-TV1JD102J	R 1k	1/16W Metal Oxide	AA
R303	VRS-TV1JD560J	R 56	1/16W Metal Oxide	AA
R304	VRS-TV1JD560J	R 56	1/16W Metal Oxide	AA

Ref. No.	Part No.	★	Description	Code
R305	VRS-TV1JD393J	R 39k	1/16W Metal Oxide	AA
R306	VRS-TV1JD393J	R 39k	1/16W Metal Oxide	AA
R307	VRS-TV1JD332J	R 3.3k	1/16W Metal Oxide	AA
R308	VRS-TV1JD332J	R 3.3k	1/16W Metal Oxide	AA
R309	VRS-TV1JD472J	R 4.7k	1/16W Metal Oxide	AA
R310	VRS-TV1JD472J	R 4.7k	1/16W Metal Oxide	AA
R311	VRS-TV1JD223J	R 22k	1/16W Metal Oxide	AA
R312	VRS-TV1JD223J	R 22k	1/16W Metal Oxide	AA
R313	VRD-RA2EE105J	R 1M	1/4W Carbon	AA
R314	VRD-RM2HD221J	R 220	1/2W Carbon	AA
R315	VRD-RA2EE105J	R 1M	1/4W Carbon	AA
R317	VRS-TV1JD154J	R 150k	1/16W Metal Oxide	AA
R318	VRS-TV1JD472J	R 4.7k	1/16W Metal Oxide	AA
△ R320	VRG-RF2EB100J	R 10	1/4W Fuse Resistor	AB
R322	VRS-TV1JD102J	R 1k	1/16W Metal Oxide	AA
R327	VRS-TV1JD101J	R 100	1/16W Metal Oxide	AA
R328	VRS-TV1JD101J	R 100	1/16W Metal Oxide	AA
R329	VRS-TV1JD824J	R 820k	1/16W Metal Oxide	AA
△ R330	VRG-RF2EB100J	R 10	1/4W Fuse Resistor	AB
R331	VRS-TV1JD102J	R 1k	1/16W Metal Oxide	AA
R333	VRS-TV1JD152J	R 1.5k	1/16W Metal Oxide	AA
R334	VRS-TV1JD152J	R 1.5k	1/16W Metal Oxide	AA
R335	VRD-RA2BE182J	R 1.8k	1/8W Carbon	AA
R336	VRS-TV1JD182J	R 1.8k	1/16W Metal Oxide	AA
R337	VRS-TV1JD272J	R 2.7k	1/16W Metal Oxide	AA
R338	VRD-RA2EE2R2J	R 2.2	1/4W Carbon	AA
R339	VRD-RA2EE2R2J	R 2.2	1/4W Carbon	AA
R341	VRS-TV1JD101J	R 100	1/16W Metal Oxide	AA
R342	VRS-TV1JD103J	R 10k	1/16W Metal Oxide	AA
R344	VRD-RA2BE103J	R 10k	1/8W Carbon	AA
R345	VRS-TV1JD103J	R 10k	1/16W Metal Oxide	AA
R346	VRS-TV1JD103J	R 10k	1/16W Metal Oxide	AA
R349	VRD-RA2BE103J	R 10k	1/8W Carbon	AA
R350	VRS-TV1JD103J	R 10k	1/16W Metal Oxide	AA
R352	VRS-TV1JD101J	R 100	1/16W Metal Oxide	AA
R353	VRS-TV1JD182J	R 1.8k	1/16W Metal Oxide	AA
R354	VRS-TV1JD182J	R 1.8k	1/16W Metal Oxide	AA
R355	VRS-TV1JD392J	R 3.9k	1/16W Metal Oxide	AA
R356	VRS-TV1JD123J	R 12k	1/16W Metal Oxide	AA
R357	VRS-TV1JD103J	R 10k	1/16W Metal Oxide	AA
R358	VRS-TV1JD123J	R 12k	1/16W Metal Oxide	AA
R359	VRS-TV1JD682J	R 6.8k	1/16W Metal Oxide	AA
R360	VRS-TV1JD392J	R 3.9k	1/16W Metal Oxide	AA
R361	VRS-TV1JD392J	R 3.9k	1/16W Metal Oxide	AA
R362	VRS-TV1JD183J	R 18k	1/16W Metal Oxide	AA
R364	VRS-TV1JD392J	R 3.9k	1/16W Metal Oxide	AA
R365	VRS-TV1JD123J	R 12k	1/16W Metal Oxide	AA
R366	VRS-TV1JD123J	R 12k	1/16W Metal Oxide	AA
R367	VRD-RA2BE123J	R 12k	1/8W Carbon	AA
R368	VRS-TV1JD562J	R 5.6k	1/16W Metal Oxide	AA
R369	VRS-TV1JD562J	R 5.6k	1/16W Metal Oxide	AA
△ R370	VRG-RF2EB100J	R 10	1/4W Fuse Resistor	AB
R371	VRD-RA2EE2R2J	R 2.2	1/4W Carbon	AA
R373	VRN-VV3DBR39J	R 0.39	2W Metal Film	AA
R376	VRS-TV1JD682J	R 6.8k	1/16W Metal Oxide	AA
R377	VRS-TV1JD272J	R 2.7k	1/16W Metal Oxide	AA
△ R381	VRS-TV1JD562J	R 5.6k	1/16W Metal Oxide	AA
△ R382	VRS-TV1JD562J	R 5.6k	1/16W Metal Oxide	AA
△ R383	VRD-RA2BE391J	R 390	1/8W Carbon	AA
△ R384	VRD-RA2BE102J	R 1k	1/8W Carbon	AA
R401	VRS-TV1JD821J	R 820	1/16W Metal Oxide	AA
R402	VRS-TV1JD821J	R 820	1/16W Metal Oxide	AA
R403	VRD-RA2EE471J	R 470	1/4W Carbon	AA
R404	VRS-TV1JD821J	R 820	1/16W Metal Oxide	AA
R405	VRS-TV1JD821J	R 820	1/16W Metal Oxide	AA
R406	VRD-RA2EE471J	R 470	1/4W Carbon	AA
R410	VRS-TV1JD101J	R 100	1/16W Metal Oxide	AA
R412	VRD-RA2EE471J	R 470	1/4W Carbon	AA
R413	VRS-TV1JD101J	R 100	1/16W Metal Oxide	AA
R415	VRS-TV1JD101J	R 100	1/16W Metal Oxide	AA
R416	VRS-TV1JD392J	R 3.9k	1/16W Metal Oxide	AA
R417	VRD-RA2EE471J	R 470	1/4W Carbon	AA
R418	VRD-RA2BE101J	R 100	1/8W Carbon	AB
R419	VRD-RA2BE101J	R 100	1/8W Carbon	AB
R420	VRS-TV1JD332J	R 3.3k	1/16W Metal Oxide	AA

Ref. No.	Part No.	★	Description	Code
DUNTK9074WEW7				
PWB-A: MAIN UNIT (Continued)				
R421	VRS-TV1JD273J	R	27k 1/16W Metal Oxide	AA
R422	VRS-TV1JD394J	R	390k 1/16W Metal Oxide	AA
R423	VRS-TV1JD394J	R	390k 1/16W Metal Oxide	AA
R424	VRD-RA2EE105J	R	1M 1/4W Carbon	AA
R425	VRS-TV1JD682J	R	6.8k 1/16W Metal Oxide	AA
R427	VRS-TV1JD223J	R	22k 1/16W Metal Oxide	AA
R428	VRD-RA2BE154J	R	150k 1/8W Carbon	AA
R429	VRS-TV1JD392J	R	3.9k 1/16W Metal Oxide	AA
R430	VRS-TV1JD222J	R	2.2k 1/16W Metal Oxide	AA
R450	VRD-RM2HD471J	R	470 1/2W Carbon	AA
R451	VRD-RA2BE101J	R	100 1/8W Carbon	AB
R457	VRD-RM2HD271J	R	270 1/2W Carbon	AA
R461	VRS-TV1JD103J	R	10k 1/16W Metal Oxide	AA
R462	VRS-TV1JD222J	R	2.2k 1/16W Metal Oxide	AA
R463	VRS-TV1JD101J	R	100 1/16W Metal Oxide	AA
R464	VRS-TV1JD101J	R	100 1/16W Metal Oxide	AA
R465	VRS-TV1JD561J	R	560 1/16W Metal Oxide	AA
R466	VRS-TV1JD561J	R	560 1/16W Metal Oxide	AA
R467	VRS-TV1JD561J	R	560 1/16W Metal Oxide	AA
R468	VRD-RA2BE562J	R	5.6k 1/8W Carbon	AA
R469	VRS-TV1JD102J	R	1k 1/16W Metal Oxide	AA
R470	VRD-RA2BE101J	R	100 1/8W Carbon	AB
R471	VRS-TV1JD473J	R	47k 1/16W Metal Oxide	AA
R472	VRS-TV1JD472J	R	4.7k 1/16W Metal Oxide	AA
R474	VRS-TV1JD392J	R	3.9k 1/16W Metal Oxide	AA
R475	VRS-TV1JD562J	R	5.6k 1/16W Metal Oxide	AA
R476	VRS-TV1JD224J	R	220k 1/16W Metal Oxide	AA
R478	VRD-RA2EE471J	R	470 1/4W Carbon	AA
R479	VRS-TV1JD472J	R	4.7k 1/16W Metal Oxide	AA
R480	VRS-TV1JD222J	R	2.2k 1/16W Metal Oxide	AA
R481	VRS-TV1JD273J	R	27k 1/16W Metal Oxide	AA
R482	VRS-TV1JD223J	R	22k 1/16W Metal Oxide	AA
R485	VRS-TV1JD223J	R	22k 1/16W Metal Oxide	AA
R486	VRS-TV1JD472J	R	4.7k 1/16W Metal Oxide	AA
R489	VRS-TV1JD121J	R	120 1/16W Metal Oxide	AA
R490	VRS-TV1JD682J	R	6.8k 1/16W Metal Oxide	AA
R491	VRS-TV1JD822J	R	8.2k 1/16W Metal Oxide	AA
R492	VRS-TV1JD391J	R	390 1/16W Metal Oxide	AA
R493	VRD-RA2BE154J	R	150k 1/8W Carbon	AA
R494	VRS-TV1JD101J	R	100 1/16W Metal Oxide	AA
R495	VRS-TV1JD471J	R	470 1/16W Metal Oxide	AA
R496	VRD-RA2BE104J	R	100k 1/8W Carbon	AA
R497	VRS-TV1JD104J	R	100k 1/16W Metal Oxide	AA
R498	VRS-TV1JD101J	R	100 1/16W Metal Oxide	AA
R801	VRS-TV1JD104J	R	100k 1/16W Metal Oxide	AA
R802	VRS-TV1JD104J	R	100k 1/16W Metal Oxide	AA
R803	VRS-TV1JD103J	R	10k 1/16W Metal Oxide	AA
R804	VRS-TV1JD183J	R	18k 1/16W Metal Oxide	AA
R805	VRS-TV1JD153J	R	15k 1/16W Metal Oxide	AA
R806	VRS-TV1JD102J	R	1k 1/16W Metal Oxide	AA
R807	VRS-TV1JD153J	R	15k 1/16W Metal Oxide	AA
R808	VRS-TV1JD473J	R	47k 1/16W Metal Oxide	AA
R809	VRS-TV1JD822J	R	8.2k 1/16W Metal Oxide	AA
R815	VRS-TV1JD101J	R	100 1/16W Metal Oxide	AA
R816	VRS-TV1JD101J	R	100 1/16W Metal Oxide	AA
R817	VRS-TV1JD332J	R	3.3k 1/16W Metal Oxide	AA
R818	VRD-RA2BE102J	R	1k 1/8W Carbon	AA
R821	VRD-RA2EE475J	R	4.7M 1/4W Carbon	AA
R822	VRD-RA2EE475J	R	4.7M 1/4W Carbon	AA
R823	VRS-TV1JD122J	R	1.2k 1/16W Metal Oxide	AA
R825	VRS-TV1JD821J	R	820 1/16W Metal Oxide	AA
R826	VRS-TV1JD102J	R	1k 1/16W Metal Oxide	AA
R827	VRD-RM2HD121J	R	120 1/2W Carbon	AA
R828	VRS-TV1JD102J	R	1k 1/16W Metal Oxide	AA
R829	VRS-TV1JD103J	R	10k 1/16W Metal Oxide	AA
R830	VRS-TV1JD102J	R	1k 1/16W Metal Oxide	AA
R833	VRS-TV1JD221J	R	220 1/16W Metal Oxide	AA
R834	VRS-TV1JD221J	R	220 1/16W Metal Oxide	AA
R835	VRS-TV1JD221J	R	220 1/16W Metal Oxide	AA
R836	VRD-RA2BE473J	R	47k 1/8W Carbon	AA
R837	VRS-TV1JD473J	R	47k 1/16W Metal Oxide	AA
R838	VRS-TV1JD222J	R	2.2k 1/16W Metal Oxide	AA

Ref. No.	Part No.	★	Description	Code
R839	VRS-TV1JD153J	R	15k 1/16W Metal Oxide	AA
R840	VRS-TV1JD183J	R	18k 1/16W Metal Oxide	AA
R841	VRS-TV1JD822J	R	8.2k 1/16W Metal Oxide	AA
R842	VRS-TV1JD561J	R	560 1/16W Metal Oxide	AA
R843	VRS-TV1JD471J	R	470 1/16W Metal Oxide	AA
R846	VRD-RA2BE101J	R	100 1/8W Carbon	AB
R847	VRS-TV1JD101J	R	100 1/16W Metal Oxide	AA
R848	VRS-TV1JD392J	R	3.9k 1/16W Metal Oxide	AA
R901	VRS-TV1JD101J	R	100 1/16W Metal Oxide	AA
R903	VRS-TV1JD222J	R	2.2k 1/16W Metal Oxide	AA
R906	VRD-RA2EE332J	R	3.3k 1/4W Carbon	AA
R1001	VRS-TV1JD103J	R	10k 1/16W Metal Oxide	AA
R1002	VRS-TV1JD473J	R	47k 1/16W Metal Oxide	AA
R1003	VRS-TV1JD103J	R	10k 1/16W Metal Oxide	AA
R1004	VRS-TV1JD101J	R	100 1/16W Metal Oxide	AA
R1005	VRS-TV1JD222J	R	2.2k 1/16W Metal Oxide	AA
R1007	VRS-TV1JD101J	R	100 1/16W Metal Oxide	AA
R1008	VRS-TV1JD563J	R	56k 1/16W Metal Oxide	AA
R1009	VRD-RA2BE222J	R	2.2k 1/8W Carbon	AA
R1011	VRS-TV1JD000J	R	0 1/16W Metal Oxide	AA
R1013	VRS-TV1JD000J	R	0 1/16W Metal Oxide	AA
R1014	VRS-TV1JD563J	R	56k 1/16W Metal Oxide	AA
R1016	VRS-TV1JD563J	R	56k 1/16W Metal Oxide	AA
R1018	VRS-TV1JD563J	R	56k 1/16W Metal Oxide	AA
R1020	VRS-TV1JD563J	R	56k 1/16W Metal Oxide	AA
R1023	VRS-TV1JD000J	R	0 1/16W Metal Oxide	AA
R1024	VRS-TV1JD563J	R	56k 1/16W Metal Oxide	AA
R1026	VRS-TV1JD563J	R	56k 1/16W Metal Oxide	AA
R1027	VRS-TV1JD563J	R	56k 1/16W Metal Oxide	AA
R1028	VRS-TV1JD101J	R	100 1/16W Metal Oxide	AA
R1031	VRS-TV1JD101J	R	100 1/16W Metal Oxide	AA
R1032	VRS-TV1JD101J	R	100 1/16W Metal Oxide	AA
R1033	VRS-TV1JD102J	R	1k 1/16W Metal Oxide	AA
R1034	VRS-TV1JD563J	R	56k 1/16W Metal Oxide	AA
R1035	VRS-TV1JD562J	R	5.6k 1/16W Metal Oxide	AA
R1036	VRS-TV1JD562J	R	5.6k 1/16W Metal Oxide	AA
R1037	VRS-TV1JD562J	R	5.6k 1/16W Metal Oxide	AA
R1038	VRS-TV1JD562J	R	5.6k 1/16W Metal Oxide	AA
R1039	VRS-TV1JD562J	R	5.6k 1/16W Metal Oxide	AA
R1040	VRS-TV1JD562J	R	5.6k 1/16W Metal Oxide	AA
R1041	VRS-TV1JD562J	R	5.6k 1/16W Metal Oxide	AA
R1042	VRS-TV1JD103J	R	10k 1/16W Metal Oxide	AA
R1043	VRS-TV1JD123J	R	12k 1/16W Metal Oxide	AA
R1044	VRS-TV1JD101J	R	100 1/16W Metal Oxide	AA
R1046	VRS-TV1JD562J	R	5.6k 1/16W Metal Oxide	AA
R1047	VRS-TV1JD562J	R	5.6k 1/16W Metal Oxide	AA
R1048	VRS-TV1JD333J	R	33k 1/16W Metal Oxide	AA
R1049	VRS-TV1JD103J	R	10k 1/16W Metal Oxide	AA
△ R1050	VRD-RA2BE562J	R	5.6k 1/8W Carbon	AA
△ R1051	VRS-TV1JD103J	R	10k 1/16W Metal Oxide	AA
△ R1052	VRS-TV1JD562J	R	5.6k 1/16W Metal Oxide	AA
△ R1053	VRS-TV1JD103J	R	10k 1/16W Metal Oxide	AA
△ R1054	VRS-TV1JD103J	R	10k 1/16W Metal Oxide	AA
R1055	VRS-TV1JD101J	R	100 1/16W Metal Oxide	AA
R1056	VRS-TV1JD102J	R	1k 1/16W Metal Oxide	AA
R1057	VRS-TV1JD101J	R	100 1/16W Metal Oxide	AA
R1058	VRS-TV1JD562J	R	5.6k 1/16W Metal Oxide	AA
R1059	VRS-TV1JD102J	R	1k 1/16W Metal Oxide	AA
R1060	VRS-TV1JD102J	R	1k 1/16W Metal Oxide	AA
R1061	VRS-TV1JD101J	R	100 1/16W Metal Oxide	AA
R1062	VRS-TV1JD683J	R	68k 1/16W Metal Oxide	AA
R1067	VRS-TV1JD101J	R	100 1/16W Metal Oxide	AA
R1068	VRS-TV1JD562J	R	5.6k 1/16W Metal Oxide	AA
R1069	VRS-TV1JD101J	R	100 1/16W Metal Oxide	AA
R1070	VRS-TV1JD562J	R	5.6k 1/16W Metal Oxide	AA
R1071	VRS-TV1JD101J	R	100 1/16W Metal Oxide	AA
R1072	VRS-TV1JD562J	R	5.6k 1/16W Metal Oxide	AA
R1073	VRS-TV1JD101J	R	100 1/16W Metal Oxide	AA
R1074	VRS-TV1JD103J	R	10k 1/16W Metal Oxide	AA
R1075	VRS-TV1JD101J	R	100 1/16W Metal Oxide	AA
R1076	VRS-TV1JD562J	R	5.6k 1/16W Metal Oxide	AA
R1077	VRS-TV1JD102J	R	1k 1/16W Metal Oxide	AA
R1078	VRS-TV1JD102J	R	1k 1/16W Metal Oxide	AA
R1079	VRS-TV1JD101J	R	100 1/16W Metal Oxide	AA
R1080	VRS-TV1JD222J	R	2.2k 1/16W Metal Oxide	AA

Ref. No.	Part No.	★	Description	Code
DUNTK9074WEW7 PWB-A: MAIN UNIT (Continued)				
R1081	VRS-TV1JD101J	R 100	1/16W Metal Oxide	AA
R1082	VRS-TV1JD101J	R 100	1/16W Metal Oxide	AA
R1083	VRD-RA2BE101J	R 100	1/8W Carbon	AB
R1084	VRS-TV1JD102J	R 1k	1/16W Metal Oxide	AA
R1085	VRS-TV1JD101J	R 100	1/16W Metal Oxide	AA
R1086	VRS-TV1JD101J	R 100	1/16W Metal Oxide	AA
R1087	VRD-RA2BE333J	R 33k	1/8W Carbon	AA
R1088	VRS-TV1JD562J	R 5.6k	1/16W Metal Oxide	AA
R1089	VRS-TV1JD103J	R 10k	1/16W Metal Oxide	AA
R1090	VRS-TV1JD332J	R 3.3k	1/16W Metal Oxide	AA
R1091	VRS-TV1JD332J	R 3.3k	1/16W Metal Oxide	AA
R1092	VRD-RA2BE103J	R 10k	1/8W Carbon	AA
R1093	VRS-TV1JD273J	R 27k	1/16W Metal Oxide	AA
R1094	VRS-TV1JD683J	R 68k	1/16W Metal Oxide	AA
R1095	VRS-TV1JD562J	R 5.6k	1/16W Metal Oxide	AA
R1096	VRS-TV1JD273J	R 27k	1/16W Metal Oxide	AA
R1097	VRS-TV1JD681J	R 680	1/16W Metal Oxide	AA
R1098	VRD-RA2BE100J	R 10	1/8W Carbon	AA
△ R1099	VRS-TV1JD102J	R 1k	1/16W Metal Oxide	AA
R1101	VRS-TV1JD473J	R 47k	1/16W Metal Oxide	AA
R1102	VRS-TV1JD473J	R 47k	1/16W Metal Oxide	AA
R1103	VRS-TV1JD273J	R 27k	1/16W Metal Oxide	AA
R1104	VRS-TV1JD822J	R 8.2k	1/16W Metal Oxide	AA
R1105	VRS-TV1JD472J	R 4.7k	1/16W Metal Oxide	AA
R1106	VRS-TV1JD222J	R 2.2k	1/16W Metal Oxide	AA
R1107	VRD-RM2HD122J	R 1.2k	1/2W Carbon	AA
R1109	VRS-TV1JD103J	R 10k	1/16W Metal Oxide	AA
R1110	VRS-TV1JD103J	R 10k	1/16W Metal Oxide	AA
R1111	VRD-RA2BE561J	R 560	1/8W Carbon	AA
R1112	VRS-TV1JD472J	R 4.7k	1/16W Metal Oxide	AA
R1113	VRS-TV1JD103J	R 10k	1/16W Metal Oxide	AA
R1114	VRD-RA2BE122J	R 1.2k	1/8W Carbon	AA
R1115	VRD-RA2BE472J	R 4.7k	1/8W Carbon	AA
R1116	VRS-TV1JD103J	R 10k	1/16W Metal Oxide	AA
R1117	VRD-RA2EE272J	R 2.7k	1/4W Carbon	AA
R1118	VRD-RA2EE272J	R 2.7k	1/4W Carbon	AA
R1119	VRS-TV1JD472J	R 4.7k	1/16W Metal Oxide	AA
R1120	VRS-TV1JD103J	R 10k	1/16W Metal Oxide	AA
R1121	VRS-TV1JD472J	R 4.7k	1/16W Metal Oxide	AA
R1122	VRS-TV1JD103J	R 10k	1/16W Metal Oxide	AA
R1123	VRD-RM2HD101J	R 100	1/2W Carbon	AA
R1124	VRD-RA2BE101J	R 100	1/8W Carbon	AB
R1125	VRD-RM2HD821J	R 820	1/2W Carbon	AA
R1126	VRS-TV1JD472J	R 4.7k	1/16W Metal Oxide	AA
R1127	VRS-TV1JD333J	R 33k	1/16W Metal Oxide	AA
R1128	VRS-TV1JD224J	R 220k	1/16W Metal Oxide	AA
R1129	VRD-RA2EE225J	R 2.2M	1/4W Carbon	AA
R1130	VRS-TV1JD333J	R 33k	1/16W Metal Oxide	AA
R1131	VRS-TV1JD562J	R 5.6k	1/16W Metal Oxide	AA
R1132	VRS-TV1JD103J	R 10k	1/16W Metal Oxide	AA
R1133	VRS-TV1JD472J	R 4.7k	1/16W Metal Oxide	AA
R1140	VRS-TV1JD223J	R 22k	1/16W Metal Oxide	AA
R1141	VRS-TV1JD332J	R 3.3k	1/16W Metal Oxide	AA
R1142	VRS-TV1JD332J	R 3.3k	1/16W Metal Oxide	AA
R1143	VRS-TV1JD332J	R 3.3k	1/16W Metal Oxide	AA
R1144	VRD-RA2EE750J	R 75	1/4W Carbon	AA
R1145	VRD-RA2BE392J	R 3.9k	1/8W Carbon	AA
R1146	VRS-TV1JD472J	R 4.7k	1/16W Metal Oxide	AA
R1147	VRS-TV1JD223J	R 22k	1/16W Metal Oxide	AA
R1148	VRS-TV1JD223J	R 22k	1/16W Metal Oxide	AA
R1149	VRS-TV1JD223J	R 22k	1/16W Metal Oxide	AA
R1150	VRS-TV1JD562J	R 5.6k	1/16W Metal Oxide	AA
R1151	VRS-TV1JD562J	R 5.6k	1/16W Metal Oxide	AA
R1152	VRS-TV1JD103J	R 10k	1/16W Metal Oxide	AA
△ R1153	VRS-TV1JD103J	R 10k	1/16W Metal Oxide	AA
△ R1154	VRS-TV1JD222J	R 2.2k	1/16W Metal Oxide	AA
R1155	VRD-RA2BE473J	R 47k	1/8W Carbon	AA
R1156	VRS-TV1JD473J	R 47k	1/16W Metal Oxide	AA
R1601	VRS-TV1JD473J	R 47k	1/16W Metal Oxide	AA
R1602	VRS-TV1JD473J	R 47k	1/16W Metal Oxide	AA
R1603	VRD-RM2HD1R5J	R 1.5	1/2W Carbon	AA
R1604	VRD-RA2BE153J	R 15k	1/8W Carbon	AA

Ref. No.	Part No.	★	Description	Code
R1605	VRD-RM2HD390J	R 39	1/2W Carbon	AA
R1606	VRD-RA2BE153J	R 15k	1/8W Carbon	AA
R1607	VRN-VV3DBR82J	R 0.82	2W Metal Film	AB
R1608	VRD-RM2HD330J	R 33	1/2W Carbon	AA
R1610	VRD-RA2EE102J	R 1k	1/4W Carbon	AA
R1611	VRS-TV1JD101J	R 100	1/16W Metal Oxide	AA
R1612	VRS-VV3DB180J	R 18	2W Metal Oxide	AA
R1613	VRD-RM2HD101J	R 100	1/2W Carbon	AA
R1614	VRD-RM2HD101J	R 100	1/2W Carbon	AA
R1615	VRS-TV1JD103J	R 10k	1/16W Metal Oxide	AA
R1616	VRS-TV1JD103J	R 10k	1/16W Metal Oxide	AA
R1617	VRS-TV1JD103J	R 10k	1/16W Metal Oxide	AA
R1618	VRS-TV1JD103J	R 10k	1/16W Metal Oxide	AA
R1619	VRS-TV1JD102J	R 1k	1/16W Metal Oxide	AA
R1620	VRS-TV1JD222J	R 2.2k	1/16W Metal Oxide	AA
R1621	VRS-TV1JD102J	R 1k	1/16W Metal Oxide	AA
R1622	VRS-TV1JD394J	R 390k	1/16W Metal Oxide	AA
R1623	VRS-TV1JD332J	R 3.3k	1/16W Metal Oxide	AA
R1624	VRS-TV1JD471J	R 470	1/16W Metal Oxide	AA
R1625	VRS-TV1JD102J	R 1k	1/16W Metal Oxide	AA
R1626	VRS-TV1JD100J	R 10	1/16W Metal Oxide	AA
R1627	VRS-TV1JD102J	R 1k	1/16W Metal Oxide	AA
R1628	VRS-TV1JD102J	R 1k	1/16W Metal Oxide	AA
R1629	VRS-TV1JD102J	R 1k	1/16W Metal Oxide	AA
R1630	VRD-RM2HD470J	R 47	1/2W Carbon	AA
R1631	VRD-RM2HD470J	R 47	1/2W Carbon	AA
R1632	VRS-TV1JD331J	R 330	1/16W Metal Oxide	AA
R1633	VRD-RM2HD101J	R 100	1/2W Carbon	AA
R1634	VRS-TV1JD102J	R 1k	1/16W Metal Oxide	AA
R1635	VRD-RM2HD820J	R 82	1/2W Carbon	AA
R1636	VRD-RM2HD820J	R 82	1/2W Carbon	AA
R1637	VRS-TV1JD331J	R 330	1/16W Metal Oxide	AA
R1638	VRS-TV1JD102J	R 1k	1/16W Metal Oxide	AA
R1639	VRS-TV1JD822J	R 8.2k	1/16W Metal Oxide	AA
R1640	VRS-TV1JD103J	R 10k	1/16W Metal Oxide	AA
R1641	VRS-TV1JD103J	R 10k	1/16W Metal Oxide	AA
R1642	VRD-RM2HD2R7J	R 2.7	1/2W Carbon	AA
R1643	VRD-RA2BE562J	R 5.6k	1/8W Carbon	AA
R1644	VRS-TV1JD182J	R 1.8k	1/16W Metal Oxide	AA
R1645	VRN-VV3DB2R2J	R 2.2	2W Metal Film	AB
R1646	VRD-RA2BE153J	R 15k	1/8W Carbon	AA
R1647	VRD-RA2BE153J	R 15k	1/8W Carbon	AA
R1648	VRS-TV1JD333J	R 33k	1/16W Metal Oxide	AA
R1649	VRD-RA2BE102J	R 1k	1/8W Carbon	AA
R1650	VRD-RA2BE153J	R 15k	1/8W Carbon	AA
R1651	VRS-VV3DB471J	R 470	2W Metal Oxide	AA
R1652	VRD-RA2BE153J	R 15k	1/8W Carbon	AA
R1653	VRN-VV3DB2R7J	R 2.7	2W Metal Film	AB
R1655	VRD-RA2BE562J	R 5.6k	1/8W Carbon	AA
R1656	VRS-VV3DB120J	R 12	2W Metal Oxide	AA
R1657	VRD-RM2HD680J	R 68	1/2W Carbon	AA
R1658	VRD-RM2HD680J	R 68	1/2W Carbon	AA
R1659	VRD-RA2BE101J	R 100	1/8W Carbon	AB
R1660	VRD-RA2EE475J	R 4.7M	1/4W Carbon	AA
R1661	VRS-TV1JD102J	R 1k	1/16W Metal Oxide	AA
R1662	VRD-RM2HD100J	R 10	1/2W Carbon	AA
R1663	VRD-RM2HD100J	R 10	1/2W Carbon	AA
R1664	VRD-RM2HD2R7J	R 2.7	1/2W Carbon	AA
R1665	VRD-RM2HD2R7J	R 2.7	1/2W Carbon	AA
R1666	VRD-RM2HD1R5J	R 1.5	1/2W Carbon	AA
R1667	VRS-TV1JD333J	R 33k	1/16W Metal Oxide	AA
R1668	VRS-TV1JD562J	R 5.6k	1/16W Metal Oxide	AA
R1669	VRS-TV1JD333J	R 33k	1/16W Metal Oxide	AA
R1670	VRS-TV1JD333J	R 33k	1/16W Metal Oxide	AA
△ R1680	VRG-RF2EB100J	R 10	1/4W Fuse Resistor	AB
R1681	VRS-TV1JD472J	R 4.7k	1/16W Metal Oxide	AA
R1682	VRS-TV1JD562J	R 5.6k	1/16W Metal Oxide	AA
R1683	VRS-TV1JD151J	R 150	1/16W Metal Oxide	AA
R1684	VRS-TV1JD104J	R 100k	1/16W Metal Oxide	AA
R1686	VRS-TV1JD562J	R 5.6k	1/16W Metal Oxide	AA
R1687	VRS-TV1JD104J	R 100k	1/16W Metal Oxide	AA
R1688	VRS-TV1JD393J	R 39k	1/16W Metal Oxide	AA
R1689	VRS-TV1JD222J	R 2.2k	1/16W Metal Oxide	AA
R1690	VRS-TV1JD682J	R 6.8k	1/16W Metal Oxide	AA
R1691	VRS-TV1JD332J	R 3.3k	1/16W Metal Oxide	AA
R1692	VRS-TV1JD393J	R 39k	1/16W Metal Oxide	AA

Ref. No.	Part No.	★	Description	Code
DUNTK9074WEW7				
PWB-A: MAIN UNIT (Continued)				
R1693	VRS-TV1JD103J	R	10k 1/16W Metal Oxide	AA
R1694	VRS-TV1JD223J	R	22k 1/16W Metal Oxide	AA
R1695	VRS-TV1JD103J	R	10k 1/16W Metal Oxide	AA
R1696	VRS-TV1JD103J	R	10k 1/16W Metal Oxide	AA
R2801	VRD-RA2EE475J	R	4.7M 1/4W Carbon	AA
R2802	VRD-RA2EE475J	R	4.7M 1/4W Carbon	AA
MISCELLANEOUS PARTS				
RDA301	PRDAR0214PEFW	R	Heat Sink, for IC301	AP
	QCNW-1981PEZZ	R	Connecting Cord	AL
	QCNW-1983PEZZ	R	Connecting Cord	AK
	QCNW-1987PEZZ	R	Connecting Cord	AK
△ J1001	QJAKE0158CEZZ	R	Jack, VIDEO IN	AF
△ J1002	QJAKE0159CEZZ	R	Jack, L-IN	AF
△ J1003	QJAKE0157CEZZ	R	Jack, R-IN	AG
P201	QPLGN0261CEZZ	R	Plug, 2Pin	AB
P301	QPLGN0461CEZZ	R	Plug, 4Pin	AB
P302	QPLGN0561CEZZ	R	Plug, 5Pin	AB
P304	QPLGN0361CEZZ	R	Plug, 3Pin	AB
P1002	QPLGN0261CEZZ	R	Plug, 2Pin	AB
P1003	QPLGN0461CEZZ	R	Plug, 4Pin	AB
RMC1001	RRMCU0222CEZZ	R	Remote Receiver	AL
SC303	QSOCN0403CENT	R	Socket, 4Pin	AC
SC801	QSOCN0503CENT	R	Socket, 5Pin	AC
SC401	QSOCN0503CENT	R	Socket, 5Pin	AC
SC402	QSOCN0284FJZZ	R	Socket, 20Pin	AK
SC403	QSOCN0284FJZZ	R	Socket, 20Pin	AK
SC406	QSOCN0284FJZZ	R	Socket, 20Pin	AK
SC602	QSOCN1003CENT	R	Socket, 10Pin	AC
SC1001	QSOCN1003CENT	R	Socket, 10Pin	AC
SLD201	PSLDM0209PEFW	R	Shield	AH
SLD202	PSLDM0210PEFW	R	Shield	AG
SLD1001	PSLDM0211PEFW	R	Shield	AG
S1006	QSW-B0015CEZZ	R	Switch, SET-UP	AC
S1101	QSW-K0079GEZZ	R	Switch, PRE SET	AB
S1102	QSW-K0079GEZZ	R	Switch, VOL DOWN	AB
S1103	QSW-K0079GEZZ	R	Switch, VOL UP	AB
S1104	QSW-K0079GEZZ	R	Switch, CH DOWN	AB
S1105	QSW-K0079GEZZ	R	Switch, CH UP	AB
TP201	QLUGP0102PEZZ	R	Lug	AA
TP801	QLUGP0102PEZZ	R	Lug	AA
TP802	QLUGP0102PEZZ	R	Lug	AA
TP1680	QLUGP0102PEZZ	R	Lug	AA
	LHLDP1053PE00	R	Holder	AD
	LHLDZ0088PEZZ	R	Holder	AD

DUNTK8776WEX2
PWB-B: CRT UNIT

TRANSISTORS				
Q850	VS2SC4544LB1E	R	2SC4544	AD
Q851	VS2SC4544LB1E	R	2SC4544	AD
Q852	VS2SC4544LB1E	R	2SC4544	AD
Q853	VS2SC1815GW-1	R	2SC1815GW	AB
Q854	VS2SC1815GW-1	R	2SC1815GW	AB
Q855	VS2SC1815GW-1	R	2SC1815GW	AB
Q856	VS2SA1015Y/1E	R	2SA1015Y	AC
Q857	VS2SC1815GW-1	R	2SC1815GW	AB
Q858	VS2SA1015Y/1E	R	2SA1015Y	AC
Q1501	VS2SA1837/-1	R	2SA1837	AF
Q1502	VS2SC4793/-1	R	2SC4793	AF
Q1503	VS2SC1815YW-1	R	2SC1815YW	AC
Q1504	VS2SA1015Y/1E	R	2SA1015Y	AC
Q1506	VS2SC1815YW-1	R	2SC1815YW	AC
Q1507	VS2SA1015Y/1E	R	2SA1015Y	AC
Q1508	VS2SC1815YW-1	R	2SC1815YW	AC
Q1509	VS2SC1815YW-1	R	2SC1815YW	AC
Q1510	VS2SC1815YW-1	R	2SC1815YW	AC

Ref. No.	Part No.	★	Description	Code
DIODES				
D850	VHD1SS119//1E	R	1SS119	AA
D851	VHD1SS119//1E	R	1SS119	AA
D852	VHD1SS119//1E	R	1SS119	AA
D853	VHD1SS119//1E	R	1SS119	AA
D854	VHD1SS119//1E	R	1SS119	AA
D855	VHD1SS119//1E	R	1SS119	AA
D856	VHD1SS119//1E	R	1SS119	AA
D857	RH-EX0619GEZZ	R	Zener, EX0619GE	AA
D858	VHD1SS119//1E	R	1SS119	AA
D859	VHD1SS119//1E	R	1SS119	AA
D860	VHD1SS119//1E	R	1SS119	AA
D1501	VHD1SS119//1E	R	1SS119	AA
D1502	VHD1SS119//1E	R	1SS119	AA
D1503	RH-DX0086TAZZ	R	DX0086TA	AC
D1504	RH-DX0086TAZZ	R	DX0086TA	AC
D1516	VHD1SS119//1E	R	1SS119	AA
D1518	VHD1SS119//1E	R	1SS119	AA
D1522	VHD1SS119//1E	R	1SS119	AA
COILS				
L854	VP-2K470K000K	R	Peaking, 47μH	AB
L855	VP-2K470K000K	R	Peaking, 47μH	AB
L856	VP-2K470K000K	R	Peaking, 47μH	AB
CONTROL				
R890	RVR-M4263CEZZ	R	330(B), Sub-Bright	AD
CAPACITORS				
△ C850	VCEAGA2EW106M	R	10 250V Electrolytic	AC
C851	RC-KZ0153CEZZ	R	0.001 3KV Ceramic	AB
C853	VCKYD41HB471K	R	470p 50V Ceramic	AA
C854	VCKYPA1HB331K	R	330p 50V Ceramic	AA
C855	VCKYPA1HB561K	R	560p 50V Ceramic	AA
C856	VCKYPA1HB471K	R	470p 50V Ceramic	AA
C857	VCKYD41HB471K	R	470p 50V Ceramic	AA
C858	VCKYPA1HB471K	R	470p 50V Ceramic	AA
C859	VCEAGA1CW107M	R	100 16V Electrolytic	AB
C860	VCEAGA1CW476M	R	47 16V Electrolytic	AB
C861	VCKYPA1HF103Z	R	0.01 50V Ceramic	AA
C863	VCEAGA1CW106M	R	10 16V Electrolytic	AA
C864	VCEAGA1CW226M	R	22 16V Electrolytic	AB
C1501	VCKYPA1HF103Z	R	0.01 50V Ceramic	AA
C1502	VCKYPA2HB472K	R	4700p 500V Ceramic	AB
C1503	VCKYPA2HB472K	R	4700p 500V Ceramic	AB
C1504	VCKYPA1HF103Z	R	0.01 50V Ceramic	AA
C1505	VCEAGA1CW107M	R	100 16V Electrolytic	AB
C1506	VCEAGA2CW106M	R	10 160V Electrolytic	AC
C1507	VCEAGA1CW107M	R	100 16V Electrolytic	AB
C1508	VCCSPA2HL560K	R	56p 500V Ceramic	AA
C1509	VCEAGA2AW226M	R	22 100V Electrolytic	AC
C1521	VCKYPA1HF103Z	R	0.01 50V Ceramic	AA
C1522	VCKYPA1HF103Z	R	0.01 50V Ceramic	AA
C1524	VCEAGA1CW107M	R	100 16V Electrolytic	AB
C1527	VCKYPA1HF103Z	R	0.01 50V Ceramic	AA
C1529	VCKYPA1HF103Z	R	0.01 50V Ceramic	AA
RESISTORS				
R850	VRC-MA2HG102K	R	1k 1/2W Solid	AA
R851	VRC-MA2HG102K	R	1k 1/2W Solid	AA
R852	VRC-MA2HG102K	R	1k 1/2W Solid	AA
R853	VRS-VV3DB183J	R	18k 2W Metal Oxide	AA
R854	VRS-VV3DB183J	R	18k 2W Metal Oxide	AA
R855	VRS-VV3DB183J	R	18k 2W Metal Oxide	AA
R856	VRS-VV3DB153J	R	15k 2W Metal Oxide	AA
R857	VRS-VV3DB153J	R	15k 2W Metal Oxide	AA
R858	VRS-VV3DB153J	R	15k 2W Metal Oxide	AA
R859	VRC-MA2HG224K	R	220k 1/2W Solid	AA
R860	VRD-RA2EE151J	R	150 1/4W Carbon	AA
R861	VRD-RA2BE221J	R	220 1/8W Carbon	AA
R862	VRD-RA2BE221J	R	220 1/8W Carbon	AA
R863	VRD-RA2BE221J	R	220 1/8W Carbon	AA
R864	VRD-RA2BE471J	R	470 1/8W Carbon	AA
R865	VRD-RA2BE471J	R	470 1/8W Carbon	AA
R866	VRD-RA2BE471J	R	470 1/8W Carbon	AA

Ref. No.	Part No.	★	Description	Code
DUNTK8776WEX2				
PWB-B: CRT UNIT (Continued)				
R867	VRD-RA2BE121J	R	120 1/8W Carbon	AA
R868	VRD-RA2BE181J	R	180 1/8W Carbon	AA
R869	VRD-RA2BE121J	R	120 1/8W Carbon	AA
R870	VRD-RA2BE181J	R	180 1/8W Carbon	AA
R871	VRD-RA2BE121J	R	120 1/8W Carbon	AA
R872	VRD-RA2BE181J	R	180 1/8W Carbon	AA
R873	VRD-RA2BE471J	R	470 1/8W Carbon	AA
R874	VRD-RA2BE471J	R	470 1/8W Carbon	AA
R875	VRD-RA2BE471J	R	470 1/8W Carbon	AA
R876	VRD-RA2BE561J	R	560 1/8W Carbon	AA
R877	VRD-RA2BE561J	R	560 1/8W Carbon	AA
R878	VRD-RA2BE561J	R	560 1/8W Carbon	AA
R879	VRD-RA2BE151J	R	150 1/8W Carbon	AA
R880	VRD-RA2BE221J	R	220 1/8W Carbon	AA
R881	VRD-RA2BE221J	R	220 1/8W Carbon	AA
R882	VRD-RA2BE101J	R	100 1/8W Carbon	AB
R883	VRD-RA2BE101J	R	100 1/8W Carbon	AB
R884	VRD-RA2BE101J	R	100 1/8W Carbon	AB
R887	VRD-RM2HD471J	R	470 1/2W Carbon	AA
R888	VRD-RA2BE152J	R	1.5k 1/8W Carbon	AA
R889	VRD-RA2BE681J	R	680 1/8W Carbon	AA
R891	VRD-RA2BE101J	R	100 1/8W Carbon	AB
R892	VRD-RA2BE223J	R	22k 1/8W Carbon	AA
R893	VRD-RA2BE100J	R	10 1/8W Carbon	AA
R894	VRD-RA2BE682J	R	6.8k 1/8W Carbon	AA
R895	VRC-MA2HG335J	R	3.3M 1/2W Solid	AC
R1502	VRD-RA2BE561J	R	560 1/8W Carbon	AA
R1503	VRD-RA2EE560J	R	56 1/4W Carbon	AA
R1504	VRD-RA2EE2R7J	R	2.7 1/4W Carbon	AA
R1505	VRD-RA2BE101J	R	100 1/8W Carbon	AB
R1506	VRD-RA2BE100J	R	10 1/8W Carbon	AA
R1507	VRD-RA2BE820J	R	82 1/8W Carbon	AA
R1508	VRD-RA2BE683J	R	68k 1/8W Carbon	AA
R1509	VRD-RA2BE123J	R	12k 1/8W Carbon	AA
R1510	VRD-RM2HD121J	R	120 1/2W Carbon	AA
R1511	VRD-RA2BE820J	R	82 1/8W Carbon	AA
R1512	VRD-RA2BE683J	R	68k 1/8W Carbon	AA
R1513	VRD-RA2BE561J	R	560 1/8W Carbon	AA
R1514	VRD-RA2EE560J	R	56 1/4W Carbon	AA
R1515	VRD-RA2EE2R7J	R	2.7 1/4W Carbon	AA
R1516	VRS-VV3DB221J	R	220 2W Metal Oxide	AA
R1531	VRD-RA2BE153J	R	15k 1/8W Carbon	AA
R1532	VRD-RA2BE153J	R	15k 1/8W Carbon	AA
R1533	VRD-RA2BE471J	R	470 1/8W Carbon	AA
R1534	VRD-RA2BE102J	R	1k 1/8W Carbon	AA
R1537	VRD-RA2BE221J	R	220 1/8W Carbon	AA
R1538	VRD-RA2BE221J	R	220 1/8W Carbon	AA
R1539	VRD-RA2BE681J	R	680 1/8W Carbon	AA
R1540	VRD-RA2BE104J	R	100k 1/8W Carbon	AA
R1541	VRD-RA2BE103J	R	10k 1/8W Carbon	AA
R1542	VRD-RA2BE223J	R	22k 1/8W Carbon	AA
R1543	VRD-RA2BE681J	R	680 1/8W Carbon	AA
R1544	VRD-RA2BE103J	R	10k 1/8W Carbon	AA
R1545	VRD-RA2BE153J	R	15k 1/8W Carbon	AA
R1547	VRD-RA2BE151J	R	150 1/8W Carbon	AA
R1548	VRD-RA2BE332J	R	3.3k 1/8W Carbon	AA
R1549	VRD-RA2BE393J	R	39k 1/8W Carbon	AA
R1550	VRD-RM2HD471J	R	470 1/2W Carbon	AA
MISCELLANEOUS PARTS				
RDA850	PRDAR0083PEFW	R	Heat Sink, for Q850	AD
RDA851	PRDAR0083PEFW	R	Heat Sink, for Q851	AD
RDA852	PRDAR0083PEFW	R	Heat Sink, for Q852	AD
RDA1501	PRDAR0083PEFW	R	Heat Sink, for Q1501	AD
RDA1502	PRDAR0083PEFW	R	Heat Sink, for Q1502	AD
FB1501	RBLN-0020CEZZ	R	Balun, BLN-0020CE	AB
P850	QPLGN0361CEZZ	R	Plug, 3Pin	AB
P851	QSOCN0503CENT	R	Socket, 5Pin	AC
SC1501	QSOCN0503CENT	R	Socket, 5Pin	AC
P1501	QPLGN0261CEZZ	R	Plug, 2Pin	AB
SC850	QSOCV0919CEZZ	R	Socket, 9Pin	AH
SC851	QTIPM0083CEZZ	R	Tip	AB

Ref. No.	Part No.	★	Description	Code
SC852	QTIPM0083CEZZ	R	Tip	AB
SC853	QTIPM0083CEZZ	R	Tip	AB
SC855	QTIPM0083CEZZ	R	Tip	AB
DUNTK9373WEV4				
PWB-C: IGR UNIT				
INTEGRATED CIRCUITS				
IC2300	VHITDA9813T-1	R	TDA9813T	AY
IC2302	VHITDA9840T-1	R	TDA9840T	AS
TRANSISTOR				
Q2300	VS2SC2735//1E	R	2SC2735	AC
DIODE				
D2305	RH-EX1222CEZZ	R	Zener, EX1222CE	AE
PACKAGED CIRCUIT				
X2301	RCRSB0174GEZZ	R	Crystal, CRSB0174GE	AF
COILS AND FILTERS				
CF2300	RFILC0063CEZZ	R	Filter, C0063CE	AG
CF2301	RFILC0061CEZZ	R	Filter, C0061CEZ	AF
SF2300	RFILC0016PEZZ	R	Filter, C0016PEZ	AS
L2306	VP-XF1R2K0000	R	Peaking, 1.2μH	AB
T2301	RCiLi0489CEZZ	R	IF Coil	AE
T2302	RCiLD0231CEZZ	R	Detection Coil	AF
CONTROLS				
R2339	RVR-M4624GEZZ	R	4.7K(B), Separation	AB
R2371	RVR-M4624GEZZ	R	4.7K(B), Audio Level	AB
CAPACITORS				
C2300	VCKYCY1HF103Z	R	0.01 50V Ceramic	AA
C2301	VCKYCY1HF103Z	R	0.01 50V Ceramic	AA
C2302	VCKYCY1HF103Z	R	0.01 50V Ceramic	AA
C2303	VCKYCY1HF103Z	R	0.01 50V Ceramic	AA
C2304	VCKYCY1HF103Z	R	0.01 50V Ceramic	AA
C2305	VCKYCY1HF103Z	R	0.01 50V Ceramic	AA
C2306	VCEAGA1CW476M	R	47 16V Electrolytic	AB
C2312	VCEAGA1HW225M	R	2.2 50V Electrolytic	AB
C2313	VCEAGA1HW224M	R	0.22 50V Electrolytic	AA
C2353	VCEAGA1HW225M	R	2.2 50V Electrolytic	AB
C2358	VCE9GA1CW106M	R	10 16V Electrolytic	AB
C2361	VCE9GA1CW106M	R	10 16V Electrolytic	AB
C2362	VCCCCY1HH470J	R	47p 50V Ceramic	AA
C2363	VCQYTA1HM104J	R	0.1 50V Mylar	AA
C2364	VCKYCY1HF103Z	R	0.01 50V Ceramic	AA
C2365	VCEAGA1CW106M	R	10 16V Electrolytic	AA
C2366	VCEAGA0JW227M	R	220 6.3V Electrolytic	AB
C2369	VCQYTA1HM103J	R	0.01 50V Mylar	AA
C2370	VCKYCY1HF103Z	R	0.01 50V Ceramic	AA
C2371	VCEAGA0JW476M	R	47 6.3V Electrolytic	AB
C2372	VCQYTA1HM103J	R	0.01 50V Mylar	AA
C2373	VCCCCY1HH100D	R	10p 50V Ceramic	AA
C2376	VCCCCY1HH100D	R	10p 50V Ceramic	AA
C2377	VCKYCY1HF103Z	R	0.01 50V Ceramic	AA
C2381	VCQYTA1HM104J	R	0.1 50V Mylar	AA
C2388	VCE9GA1CW106M	R	10 16V Electrolytic	AB
C2389	VCE9GA1CW106M	R	10 16V Electrolytic	AB
C2392	VCEAGA1CW106M	R	10 16V Electrolytic	AA
C2393	VCKYCY1HF103Z	R	0.01 50V Ceramic	AA
C2394	VCEAGA1HW225M	R	2.2 50V Electrolytic	AB
C2395	VCKYCY1HF103Z	R	0.01 50V Ceramic	AA
C2397	VCEAGA1CW226M	R	22 16V Electrolytic	AB
C2398	VCEAGA1CW226M	R	22 16V Electrolytic	AB
C2400	VCKYCY1HF103Z	R	0.01 50V Ceramic	AA
C2401	VCKYCY1HB102K	R	1000p 50V Ceramic	AA
C2402	VCCCCY1HH100D	R	10p 50V Ceramic	AA
C2403	VCCCCY1HH100D	R	10p 50V Ceramic	AA
C2404	VCKYCY1HB102K	R	1000p 50V Ceramic	AA

△

Ref. No.	Part No.	★	Description	Code
DUNTK9373WEV4				
PWB-C: IGR UNIT (Continued)				
RESISTORS				
R2300	VRS-CY1JF101J	R	100 1/16W Metal Oxide	AA
R2301	VRS-CY1JF000J	R	0 1/16W Metal Oxide	AA
R2302	VRS-CY1JF222J	R	2.2k 1/16W Metal Oxide	AA
R2303	VRS-CY1JF470J	R	47 1/16W Metal Oxide	AA
R2305	VRD-RA2BE682J	R	6.8k 1/8W Carbon	AA
R2306	VRS-CY1JF182J	R	1.8k 1/16W Metal Oxide	AA
R2311	VRS-CY1JF181J	R	180 1/16W Metal Oxide	AA
R2334	VRS-CY1JF561J	R	560 1/16W Metal Oxide	AA
R2341	VRS-CY1JF392J	R	3.9k 1/16W Metal Oxide	AA
R2344	VRS-CY1JF101J	R	100 1/16W Metal Oxide	AA
R2345	VRS-CY1JF101J	R	100 1/16W Metal Oxide	AA
R2346	VRS-CY1JF000J	R	0 1/16W Metal Oxide	AA
R2351	VRS-CY1JF333J	R	33k 1/16W Metal Oxide	AA
R2352	VRS-CY1JF223J	R	22k 1/16W Metal Oxide	AA
R2353	VRS-CY1JF223J	R	22k 1/16W Metal Oxide	AA
R2362	VRS-CY1JF562J	R	5.6k 1/16W Metal Oxide	AA
R2363	VRS-CY1JF562J	R	5.6k 1/16W Metal Oxide	AA
R2370	VRS-CY1JF392J	R	3.9k 1/16W Metal Oxide	AA
R2374	VRS-CY1JF561J	R	560 1/16W Metal Oxide	AA
R2378	VRS-CY1JF000J	R	0 1/16W Metal Oxide	AA
R2383	VRS-CY1JF000J	R	0 1/16W Metal Oxide	AA
R2384	VRS-CY1JF223J	R	22k 1/16W Metal Oxide	AA
R2385	VRS-CY1JF223J	R	22k 1/16W Metal Oxide	AA
R2386	VRS-CY1JF472J	R	4.7k 1/16W Metal Oxide	AA
MISCELLANEOUS PARTS				
P2300	QPLGN0274FJZZ	R	Plug, 20Pin	AE
SLD2301	PSLDM0212PEFW	R	Shield	AE
SLD2302	PSLDM0213PEFW	R	Shield	AD
TP2303	QLUGP0102PEZZ	R	Lug	AA
SP1	VSP1306PB067S	R	Speaker	AV
SP2	VSP1306PB067A	R	Speaker	AV
SP3	VSPRA01T-028A	R	Speaker	AU
SP4	VSPRA01T-028A	R	Speaker	AU
DUNTK9077WEW5				
PWB-D: AV/DIG.-COMB UNIT				
INTEGRATED CIRCUITS				
IC5401	VHiTA1218AN-1	R	TA1218AN	AX
IC5402	VHiTA7348P/-1	R	TA7348P	AK
IC5461	VHiTC9090AN-1	R	TC9090AN	BC
TRANSISTORS				
Q5208	VS2SD601A/-1	R	2SD601A	AC
Q5209	VS2SD601A/-1	R	2SD601A	AC
Q5210	VS2SD601A/-1	R	2SD601A	AC
Q5211	VS2SB709A/-1	R	2SB709A	AA
Q5304	VS2SD601A/-1	R	2SD601A	AC
Q5305	VS2SD601A/-1	R	2SD601A	AC
Q5401	VS2SD601A/-1	R	2SD601A	AC
Q5402	VS2SD601A/-1	R	2SD601A	AC
Q5404	VS2SC1815GW-1	R	2SC1815GW	AB
Q5406	VS2SD601A/-1	R	2SD601A	AC
Q5409	VS2SD601A/-1	R	2SD601A	AC
Q5410	VS2SD601A/-1	R	2SD601A	AC
Q5461	VS2SD601A/-1	R	2SD601A	AC
Q5462	VS2SB709A/-1	R	2SB709A	AA
Q5463	VS2SD601A/-1	R	2SD601A	AC
Q5464	VS2SD601A/-1	R	2SD601A	AC
Q5465	VS2SD601A/-1	R	2SD601A	AC
Q5466	VS2SB709A/-1	R	2SB709A	AA
Q5467	VS2SD601A/-1	R	2SD601A	AC
Q5468	VS2SD601A/-1	R	2SD601A	AC
Q5469	VS2SD601A/-1	R	2SD601A	AC
Q5807	VS2SD601A/-1	R	2SD601A	AC
Q5861	VS2SD601A/-1	R	2SD601A	AC
Q5862	VS2SD601A/-1	R	2SD601A	AC

Ref. No.	Part No.	★	Description	Code
Q5863	VS2SB709A/-1	R	2SB709A	AA
Q5864	VS2SD601A/-1	R	2SD601A	AC
DIODES				
D5309	VHD1SS119//1E	R	1SS119	AA
D5310	RH-EX0649GEZZ	R	Zener, EX0649GE	AB
D5311	VHD1SS119//1E	R	1SS119	AA
D5312	RH-EX0649GEZZ	R	Zener, EX0649GE	AB
D5313	VHD1SS119//1E	R	1SS119	AA
D5314	RH-EX0619GEZZ	R	Zener, EX0619GE	AA
D5315	VHD1SS119//1E	R	1SS119	AA
D5316	RH-EX0619GEZZ	R	Zener, EX0619GE	AA
D5401	RH-EX0631GEZZ	R	Zener, EX0631GE	AA
D5402	RH-EX0631GEZZ	R	Zener, EX0631GE	AA
D5403	RH-EX0631GEZZ	R	Zener, EX0631GE	AA
D5404	RH-EX0631GEZZ	R	Zener, EX0631GE	AA
D5405	RH-EX0619GEZZ	R	Zener, EX0619GE	AA
D5406	RH-EX0619GEZZ	R	Zener, EX0619GE	AA
D5461	RH-EX0619GEZZ	R	Zener, EX0619GE	AA
D5462	RH-EX0619GEZZ	R	Zener, EX0619GE	AA
COILS AND FILTERS				
CF5202	RFILC0024CEZZ	R	Filter, C0024CE	AE
CF5401	RFILC0286CEZZ	R	Filter, C0286CE	AE
CF5402	RFILC0170CEZZ	R	Filter, C0170CE	AD
L5213	VP-DF8R2K0000	R	Peaking, 8.2μH	AB
L5214	VP-DF150K0000	R	Peaking, 15μH	AB
L5301	RCILP0299CEZZ	R	Coil, P0299CE	AF
L5302	RCILP0299CEZZ	R	Coil, P0299CE	AF
L5401	VP-DF100K0000	R	Peaking, 10μH	AB
L5403	VP-DF100K0000	R	Peaking, 10μH	AB
L5461	VP-DF100K0000	R	Peaking, 10μH	AB
L5462	VP-DF100K0000	R	Peaking, 10μH	AB
L5463	VP-DF101K0000	R	Peaking, 100μH	AB
L5464	VP-DF101K0000	R	Peaking, 100μH	AB
L5465	VP-XF330K0000	R	Peaking, 33μH	AB
L5466	VP-XF330K0000	R	Peaking, 33μH	AB
L5467	VP-DF101K0000	R	Peaking, 100μH	AB
L5468	VP-DF101K0000	R	Peaking, 100μH	AB
L5469	VP-DF101K0000	R	Peaking, 100μH	AB
L5470	VP-XF270K0000	R	Peaking, 27μH	AB
L5471	VP-DF101K0000	R	Peaking, 100μH	AB
L5472	VP-XF470K0000	R	Peaking, 47μH	AB
L5473	VP-XF470K0000	R	Peaking, 47μH	AB
L5861	VP-XF330K0000	R	Peaking, 33μH	AB
L5862	VP-XF150K0000	R	Peaking, 15μH	AB
L5863	VP-DF101K0000	R	Peaking, 100μH	AB
T5401	RCiLi0512CEZZ	R	IF Coil	AE
CONTROL				
R5467	RVR-M4619GEZZ	R	680(B), Video Level	AB
CAPACITORS				
C5226	VCE9GA1CW106M	R	10 16V Electrolytic	AB
C5228	VCEAGA1CW107M	R	100 16V Electrolytic	AB
C5229	VCKYTV1HF103Z	R	0.01 50V Ceramic	AA
C5230	VCCCTV1HH820J	R	82p 50V Ceramic	AA
C5231	VCCCTV1HH680J	R	68p 50V Ceramic	AA
C5232	VCEAGA1CW106M	R	10 16V Electrolytic	AA
C5233	VCCCTV1HH271J	R	270p 50V Ceramic	AA
C5268	VCCCTV1HH330J	R	33p 50V Ceramic	AA
C5375	VCKYTV1HB102K	R	1000p 50V Ceramic	AA
C5376	VCKYTV1HB102K	R	1000p 50V Ceramic	AA
C5377	VCEAGA1CW106M	R	10 16V Electrolytic	AA
C5378	VCEAGA1CW106M	R	10 16V Electrolytic	AA
C5379	VCKYTV1HB102K	R	1000p 50V Ceramic	AA
C5380	VCKYTV1HB102K	R	1000p 50V Ceramic	AA
C5381	VCEAGA1CW106M	R	10 16V Electrolytic	AA
C5382	VCEAGA1CW106M	R	10 16V Electrolytic	AA
C5383	VCEAGA1CW106M	R	10 16V Electrolytic	AA
C5384	VCEAGA1CW106M	R	10 16V Electrolytic	AA
C5385	VCEAGA1CW106M	R	10 16V Electrolytic	AA
C5386	VCEAGA1CW106M	R	10 16V Electrolytic	AA
C5387	VCKYTV1HB102K	R	1000p 50V Ceramic	AA
C5388	VCKYTV1HB102K	R	1000p 50V Ceramic	AA

Ref. No.	Part No.	★	Description	Code
DUNTK9077WEW5				
PWB-D: AV/DIG.-COMB UNIT (Continued)				
C5389	VCE9GA1CW106M	R 10	16V Electrolytic	AB
C5390	VCE9GA1CW106M	R 10	16V Electrolytic	AB
C5397	VCEAGA1CW106M	R 10	16V Electrolytic	AA
C5398	VCEAGA1CW106M	R 10	16V Electrolytic	AA
C5401	VCKYTV1HF103Z	R 0.01	50V Ceramic	AA
C5402	VCEAGA1CW106M	R 10	16V Electrolytic	AA
C5403	VCEAGA1CW477M	R 470	16V Electrolytic	AC
C5404	VCEAGA1CW106M	R 10	16V Electrolytic	AA
C5405	VCEAGA1CW106M	R 10	16V Electrolytic	AA
C5406	VCEAGA1CW106M	R 10	16V Electrolytic	AA
C5407	RC-EZ0650CEZZ	R 1000	16V Electrolytic	AE
C5408	VCKYTV1HF103Z	R 0.01	50V Ceramic	AA
C5413	VCEAGA1CW476M	R 47	16V Electrolytic	AB
C5416	VCEAGA1CW107M	R 100	16V Electrolytic	AB
C5418	VCEAGA1CW106M	R 10	16V Electrolytic	AA
C5419	VCKYTV1HF103Z	R 0.01	50V Ceramic	AA
C5420	VCEAGA1CW106M	R 10	16V Electrolytic	AA
C5421	VCEAGA1CW106M	R 10	16V Electrolytic	AA
C5422	VCKYTV1HF103Z	R 0.01	50V Ceramic	AA
C5423	VCEAGA1CW107M	R 100	16V Electrolytic	AB
C5436	VCKYTV1HF103Z	R 0.01	50V Ceramic	AA
C5437	VCQYTA1HM104J	R 0.1	50V Mylar	AA
C5460	VCEAGA0JW477M	R 470	6.3V Electrolytic	AB
C5461	VCEAGA0JW477M	R 470	6.3V Electrolytic	AB
C5462	VCKYTV1HF103Z	R 0.01	50V Ceramic	AA
C5463	VCEAGA1CW107M	R 100	16V Electrolytic	AB
C5464	VCKYTV1HF103Z	R 0.01	50V Ceramic	AA
C5465	VCCCTV1HH150J	R 15p	50V Ceramic	AA
C5466	VCCCTV1HH560J	R 56p	50V Ceramic	AA
C5467	VCCCTV1HH150J	R 15p	50V Ceramic	AA
C5468	VCEAGA1CW106M	R 10	16V Electrolytic	AA
C5469	VCEAGA1CW106M	R 10	16V Electrolytic	AA
C5470	VCKYTV1HF103Z	R 0.01	50V Ceramic	AA
C5471	VCEAGA1HW474M	R 0.47	50V Electrolytic	AA
C5472	VCKYTV1HF103Z	R 0.01	50V Ceramic	AA
C5473	VCKYTV1HF103Z	R 0.01	50V Ceramic	AA
C5474	VCEAGA0JW477M	R 470	6.3V Electrolytic	AB
C5475	VCKYTV1HF103Z	R 0.01	50V Ceramic	AA
C5476	VCKYTV1HF103Z	R 0.01	50V Ceramic	AA
C5477	VCKYTV1HF103Z	R 0.01	50V Ceramic	AA
C5478	VCEAGA0JW477M	R 470	6.3V Electrolytic	AB
C5479	VCKYTV1HF103Z	R 0.01	50V Ceramic	AA
C5480	VCKYTV1HF103Z	R 0.01	50V Ceramic	AA
C5481	VCKYTV1HF103Z	R 0.01	50V Ceramic	AA
C5482	VCCCTV1HH181J	R 180p	50V Ceramic	AA
C5483	VCKYTV1HF103Z	R 0.01	50V Ceramic	AA
C5484	VCKYTV1HF103Z	R 0.01	50V Ceramic	AA
C5485	VCCCTV1HH121J	R 120p	50V Ceramic	AA
C5486	VCKYTV1HF103Z	R 0.01	50V Ceramic	AA
C5487	VCEAGA0JW477M	R 470	6.3V Electrolytic	AB
C5488	VCKYTV1HF103Z	R 0.01	50V Ceramic	AA
C5489	VCCCTV1HH220J	R 22p	50V Ceramic	AA
C5490	VCCCTV1HH560J	R 56p	50V Ceramic	AA
C5491	VCCCTV1HH220J	R 22p	50V Ceramic	AA
C5492	VCEAGA1CW106M	R 10	16V Electrolytic	AA
C5493	VCKYTV1HF103Z	R 0.01	50V Ceramic	AA
C5494	VCEAGA1CW106M	R 10	16V Electrolytic	AA
C5495	VCKYTV1HF103Z	R 0.01	50V Ceramic	AA
C5496	VCCCTV1HH121J	R 120p	50V Ceramic	AA
C5497	VCCCTV1HH150J	R 15p	50V Ceramic	AA
C5498	VCCCTV1HH100D	R 10p	50V Ceramic	AA
C5499	VCCCTV1HH330J	R 33p	50V Ceramic	AA
C5801	VCKYTV1HF103Z	R 0.01	50V Ceramic	AA
C5840	VCEAGA1CW106M	R 10	16V Electrolytic	AA
C5841	VCKYTV1HF103Z	R 0.01	50V Ceramic	AA
C5861	VCCCTV1HH270J	R 27p	50V Ceramic	AA
C5863	VCQYTA1HM104J	R 0.1	50V Mylar	AA
C5864	VCKYTV1HF103Z	R 0.01	50V Ceramic	AA
C5865	VCEAGA1CW106M	R 10	16V Electrolytic	AA
C5866	VCCCTV1HH560J	R 56p	50V Ceramic	AA

Ref. No.	Part No.	★	Description	Code
RESISTORS				
R5223	VRS-TV1JD221J	R 220	1/16W Metal Oxide	AA
R5225	VRS-TV1JD221J	R 220	1/16W Metal Oxide	AA
R5234	VRG-RF2EB100J	R 10	1/4W	AB
R5235	VRS-TV1JD561J	R 560	1/16W Metal Oxide	AA
R5236	VRD-RM2HD391J	R 390	1/2W Carbon	AA
R5237	VRD-RA2EE331J	R 330	1/4W Carbon	AA
R5238	VRS-TV1JD122J	R 1.2k	1/16W Metal Oxide	AA
R5239	VRS-TV1JD152J	R 1.5k	1/16W Metal Oxide	AA
R5240	VRS-TV1JD103J	R 10k	1/16W Metal Oxide	AA
R5241	VRS-TV1JD101J	R 100	1/16W Metal Oxide	AA
R5242	VRS-TV1JD562J	R 5.6k	1/16W Metal Oxide	AA
R5243	VRD-RA2EE102J	R 1k	1/4W Carbon	AA
R5244	VRS-TV1JD391J	R 390	1/16W Metal Oxide	AA
R5245	VRS-TV1JD221J	R 220	1/16W Metal Oxide	AA
R5246	VRD-RA2EE681J	R 680	1/4W Carbon	AA
R5247	VRD-RA2EE102J	R 1k	1/4W Carbon	AA
R5360	VRS-TV1JD102J	R 1k	1/16W Metal Oxide	AA
R5361	VRS-TV1JD102J	R 1k	1/16W Metal Oxide	AA
R5362	VRS-TV1JD564J	R 560k	1/16W Metal Oxide	AA
R5363	VRS-TV1JD564J	R 560k	1/16W Metal Oxide	AA
R5364	VRD-RA2BE101J	R 100	1/8W Carbon	AB
R5365	VRS-TV1JD101J	R 100	1/16W Metal Oxide	AA
R5366	VRS-TV1JD102J	R 1k	1/16W Metal Oxide	AA
R5367	VRS-TV1JD102J	R 1k	1/16W Metal Oxide	AA
R5368	VRS-TV1JD564J	R 560k	1/16W Metal Oxide	AA
R5369	VRS-TV1JD564J	R 560k	1/16W Metal Oxide	AA
R5370	VRD-RA2BE101J	R 100	1/8W Carbon	AB
R5371	VRD-RA2BE101J	R 100	1/8W Carbon	AB
R5372	VRS-TV1JD104J	R 100k	1/16W Metal Oxide	AA
R5373	VRS-TV1JD104J	R 100k	1/16W Metal Oxide	AA
R5374	VRS-TV1JD101J	R 100	1/16W Metal Oxide	AA
R5375	VRS-TV1JD101J	R 100	1/16W Metal Oxide	AA
R5376	VRS-TV1JD561J	R 560	1/16W Metal Oxide	AA
R5377	VRS-TV1JD561J	R 560	1/16W Metal Oxide	AA
R5378	VRS-TV1JD102J	R 1k	1/16W Metal Oxide	AA
R5379	VRS-TV1JD102J	R 1k	1/16W Metal Oxide	AA
R5380	VRS-TV1JD473J	R 47k	1/16W Metal Oxide	AA
R5381	VRS-TV1JD473J	R 47k	1/16W Metal Oxide	AA
R5382	VRD-RA2BE101J	R 100	1/8W Carbon	AB
R5383	VRD-RA2BE101J	R 100	1/8W Carbon	AB
R5384	VRS-TV1JD564J	R 560k	1/16W Metal Oxide	AA
R5385	VRS-TV1JD564J	R 560k	1/16W Metal Oxide	AA
R5386	VRS-TV1JD102J	R 1k	1/16W Metal Oxide	AA
R5387	VRS-TV1JD102J	R 1k	1/16W Metal Oxide	AA
R5388	VRS-TV1JD101J	R 100	1/16W Metal Oxide	AA
R5389	VRS-TV1JD101J	R 100	1/16W Metal Oxide	AA
R5401	VRD-RA2EE750J	R 75	1/4W Carbon	AA
R5402	VRS-TV1JD102J	R 1k	1/16W Metal Oxide	AA
R5403	VRS-TV1JD102J	R 1k	1/16W Metal Oxide	AA
R5404	VRD-RA2EE750J	R 75	1/4W Carbon	AA
R5405	VRD-RA2BE101J	R 100	1/8W Carbon	AB
R5406	VRD-RA2EE750J	R 75	1/4W Carbon	AA
R5407	VRS-TV1JD103J	R 10k	1/16W Metal Oxide	AA
R5408	VRS-TV1JD101J	R 100	1/16W Metal Oxide	AA
R5409	VRS-TV1JD101J	R 100	1/16W Metal Oxide	AA
R5410	VRD-RA2BE101J	R 100	1/8W Carbon	AB
R5411	VRS-TV1JD102J	R 1k	1/16W Metal Oxide	AA
R5412	VRD-RA2BE101J	R 100	1/8W Carbon	AB
R5413	VRS-TV1JD102J	R 1k	1/16W Metal Oxide	AA
R5416	VRD-RA2BE101J	R 100	1/8W Carbon	AB
R5418	VRD-RM2HD221J	R 220	1/2W Carbon	AA
R5419	VRS-TV1JD101J	R 100	1/16W Metal Oxide	AA
R5420	VRS-TV1JD102J	R 1k	1/16W Metal Oxide	AA
R5422	VRS-TV1JD101J	R 100	1/16W Metal Oxide	AA
R5423	VRS-TV1JD102J	R 1k	1/16W Metal Oxide	AA
R5424	VRS-TV1JD331J	R 330	1/16W Metal Oxide	AA
R5425	VRS-TV1JD151J	R 150	1/16W Metal Oxide	AA
R5426	VRS-TV1JD000J	R 0	1/16W Metal Oxide	AA
R5431	VRD-RA2BE103J	R 10k	1/8W Carbon	AA
R5432	VRS-TV1JD101J	R 100	1/16W Metal Oxide	AA
R5439	VRS-TV1JD103J	R 10k	1/16W Metal Oxide	AA
R5440	VRD-RA2BE103J	R 10k	1/8W Carbon	AA
R5441	VRS-TV1JD473J	R 47k	1/16W Metal Oxide	AA
R5442	VRS-TV1JD473J	R 47k	1/16W Metal Oxide	AA

Ref. No.	Part No.	★	Description	Code
DUNTK9077WEW5				
PWB-D: AV/DIG.-COMB UNIT (Continued)				
R5443	VRS-TV1JD101J	R	100 1/16W Metal Oxide AA	
R5444	VRS-TV1JD102J	R	1k 1/16W Metal Oxide AA	
R5445	VRS-TV1JD331J	R	330 1/16W Metal Oxide AA	
R5448	VRS-TV1JD103J	R	10k 1/16W Metal Oxide AA	
R5449	VRS-TV1JD103J	R	10k 1/16W Metal Oxide AA	
R5451	VRS-TV1JD103J	R	10k 1/16W Metal Oxide AA	
R5452	VRS-TV1JD123J	R	12k 1/16W Metal Oxide AA	
R5453	VRS-TV1JD102J	R	1k 1/16W Metal Oxide AA	
R5454	VRS-TV1JD102J	R	1k 1/16W Metal Oxide AA	
R5455	VRS-TV1JD152J	R	1.5k 1/16W Metal Oxide AA	
R5456	VRS-TV1JD102J	R	1k 1/16W Metal Oxide AA	
R5457	VRS-TV1JD102J	R	1k 1/16W Metal Oxide AA	
R5461	VRS-TV1JD102J	R	1k 1/16W Metal Oxide AA	
R5462	VRS-TV1JD102J	R	1k 1/16W Metal Oxide AA	
R5463	VRS-TV1JD473J	R	47k 1/16W Metal Oxide AA	
R5464	VRS-TV1JD333J	R	33k 1/16W Metal Oxide AA	
R5465	VRS-TV1JD102J	R	1k 1/16W Metal Oxide AA	
R5466	VRS-TV1JD561J	R	560 1/16W Metal Oxide AA	
R5468	VRS-TV1JD102J	R	1k 1/16W Metal Oxide AA	
R5469	VRS-TV1JD102J	R	1k 1/16W Metal Oxide AA	
R5470	VRS-TV1JD101J	R	100 1/16W Metal Oxide AA	
R5471	VRS-TV1JD101J	R	100 1/16W Metal Oxide AA	
R5472	VRS-TV1JD822J	R	8.2k 1/16W Metal Oxide AA	
R5473	VRS-TV1JD123J	R	12k 1/16W Metal Oxide AA	
R5474	VRD-RA2BE821J	R	820 1/8W Carbon AA	
R5475	VRS-TV1JD102J	R	1k 1/16W Metal Oxide AA	
R5476	VRS-TV1JD102J	R	1k 1/16W Metal Oxide AA	
R5477	VRS-TV1JD473J	R	47k 1/16W Metal Oxide AA	
R5478	VRS-TV1JD223J	R	22k 1/16W Metal Oxide AA	
R5479	VRS-TV1JD102J	R	1k 1/16W Metal Oxide AA	
R5480	VRS-TV1JD561J	R	560 1/16W Metal Oxide AA	
R5481	VRS-TV1JD102J	R	1k 1/16W Metal Oxide AA	
R5482	VRS-TV1JD102J	R	1k 1/16W Metal Oxide AA	
R5483	VRS-TV1JD102J	R	1k 1/16W Metal Oxide AA	
R5484	VRS-TV1JD103J	R	10k 1/16W Metal Oxide AA	
R5485	VRS-TV1JD103J	R	10k 1/16W Metal Oxide AA	
R5486	VRS-TV1JD821J	R	820 1/16W Metal Oxide AA	
R5487	VRD-RA2BE561J	R	560 1/8W Carbon AA	
R5488	VRS-TV1JD152J	R	1.5k 1/16W Metal Oxide AA	
R5489	VRS-TV1JD123J	R	12k 1/16W Metal Oxide AA	
R5490	VRS-TV1JD562J	R	5.6k 1/16W Metal Oxide AA	
R5491	VRS-TV1JD152J	R	1.5k 1/16W Metal Oxide AA	
R5492	VRS-TV1JD471J	R	470 1/16W Metal Oxide AA	
R5493	VRS-TV1JD102J	R	1k 1/16W Metal Oxide AA	
R5494	VRS-TV1JD102J	R	1k 1/16W Metal Oxide AA	
R5605	VRS-TV1JD100J	R	10 1/16W Metal Oxide AA	
R5801	VRS-TV1JD102J	R	1k 1/16W Metal Oxide AA	
R5802	VRS-TV1JD000J	R	0 1/16W Metal Oxide AA	
R5840	VRD-RA2EE750J	R	75 1/4W Carbon AA	
R5841	VRS-TV1JD101J	R	100 1/16W Metal Oxide AA	
R5842	VRS-TV1JD101J	R	100 1/16W Metal Oxide AA	
R5843	VRS-TV1JD101J	R	100 1/16W Metal Oxide AA	
R5844	VRS-TV1JD102J	R	1k 1/16W Metal Oxide AA	
R5861	VRD-RA2BE821J	R	820 1/8W Carbon AA	
R5862	VRS-TV1JD561J	R	560 1/16W Metal Oxide AA	
R5864	VRS-TV1JD123J	R	12k 1/16W Metal Oxide AA	
R5865	VRS-TV1JD332J	R	3.3k 1/16W Metal Oxide AA	
R5866	VRS-TV1JD561J	R	560 1/16W Metal Oxide AA	
R5867	VRS-TV1JD152J	R	1.5k 1/16W Metal Oxide AA	
R5868	VRS-TV1JD102J	R	1k 1/16W Metal Oxide AA	
R5869	VRS-TV1JD102J	R	1k 1/16W Metal Oxide AA	
R5870	VRS-TV1JD102J	R	1k 1/16W Metal Oxide AA	
MISCELLANEOUS PARTS				
△ J5301	QANT0010CEZZ		Terminal, Speaker (SX-68JS9 Only)	
△ J5402	QTANJ0954CEZZ	R	Terminal, AV1.2/Monitor-Out AT	
P5201	QPLGN0285FJZZ	R	Plug, 20Pin	AE
P5202	QPLGN0274FJZZ	R	Plug, 20Pin	AE
P5203	QPLGN0261CEZZ	R	Plug, 2Pin	AB
△ SC5406	QSOCD0427CEZZ	R	Socket, 4Pin	AL
SLD5201	PSLDM0217PEFW	R	Shield	AH

Ref. No.	Part No.	★	Description	Code
SLD5202PSLDM0218PEFW R Shield AG				
DUNTK9075WEW6				
PWB-E: POWER UNIT				
INTEGRATED CIRCUITS				
IC701	VHiSTRS6709-1	R	STRS6709	AY
IC501	VHiTA8427K/-1	R	TA8427K	AL
IC502	VHiTA8859CP-1	R	TA8859CP	AT
IC703	VHiKA7812Pi-1	R	KA7812PI	AE
IC704	VHiSE120N/-1	R	SE120N	AG
TRANSISTORS				
△ Q601	VS2SC3886A/1E	R	2SC3886A	AP
Q602	VS2SC2482/-1	R	2SC2482	AD
Q603	VS2SC3851A/-1	R	2SC3851A	AD
Q604	VS2SA1015Y/1E	R	2SA1015Y	AC
Q605	VS2SA1015Y/1E	R	2SA1015Y	AC
△ Q606	VS2SC1815GW-1	R	2SC1815GW	AB
Q607	VS2SC1815GW-1	R	2SC1815GW	AB
△ Q701	VS2SC3852A/-1	R	2SC3852A	AH
△ Q709	VS2SC1815GW-1	R	2SC1815GW	AB
Q750	VS2SC1815GW-1	R	2SC1815GW	AB
Q751	VS2SC4382//1E	R	2SC4382	AF
Q752	VS2SC1815GW-1	R	2SC1815GW	AB
DIODES				
D501	RH-EX0619GEZZ	R	Zener, EX0619GE	AA
D502	RH-EX0619GEZZ	R	Zener, EX0619GE	AA
D503	RH-EX0619GEZZ	R	Zener, EX0619GE	AA
D504	RH-DX0279CEZZ	R	DX0279CE	AB
D505	RH-EX0619GEZZ	R	Zener, EX0619GE	AA
△ D601	RH-DX0255CEZZ	R	DX0255CE	AC
△ D602	RH-DX0229CEZZ	R	DX0229CE	AF
D603	RH-DX0130CEZZ	R	DX0130CE	AE
D604	RH-DX0302CEZZ	R	DX0302CE	AC
D605	RH-DX0127CEZZ	R	DX0127CE	AC
D606	RH-EX0631GEZZ	R	Zener, EX0631GE	AA
△ D607	RH-EX0655GEZZ	R	Zener, EX0655GE	AB
△ D608	VHD1SS119//1E	R	1SS119	AA
D611	RH-DX0446CEZZ	R	DX0446CE	AB
D612	RH-DX0446CEZZ	R	DX0446CE	AB
D613	RH-DX0279CEZZ	R	DX0279CE	AB
△ D701	RH-DX0336CEZZ	R	DX0336CE	AH
△ D702	RH-DX0279CEZZ	R	DX0279CE	AB
△ D703	RH-DX0471CEZZ	R	DX0471CE	AE
△ D704	RH-DX0130CEZZ	R	DX0130CE	AE
△ D705	RH-DX0130CEZZ	R	DX0130CE	AE
△ D706	RH-DX0164CEZZ	R	DX0164CE	AC
△ D707	RH-EX0629GEZZ	R	Zener, EX0629GE	AA
△ D708	RH-DX0130CEZZ	R	DX0130CE	AE
D709	RH-DX0461CEZZ	R	DX0461CE	AG
D710	RH-DX0445CEZZ	R	DX0445CE	AL
D711	RH-EX0152CEZZ	R	Zener, EX0152CE	AE
D714	RH-DX0406CEZZ	R	DX0406CE	AD
D715	RH-DX0355CEZZ	R	DX0355CE	AF
D718	RH-EX0641GEZZ	R	Zener, EX0641GE	AA
D723	RH-DX0279CEZZ	R	DX0279CE	AB
△ D726	RH-EX0295CEZZ	R	Zener, EX0295CE	AA
D750	VHD1SS119//1E	R	1SS119	AA
D751	RH-DX0279CEZZ	R	DX0279CE	AB
D752	RH-DX0279CEZZ	R	DX0279CE	AB
D753	RH-DX0279CEZZ	R	DX0279CE	AB
D754	RH-DX0279CEZZ	R	DX0279CE	AB
D755	RH-EX0641GEZZ	R	Zener, EX0641GE	AA
D756	VHD1SS119//1E	R	1SS119	AA
D757	VHD1SS119//1E	R	1SS119	AA
D758	RH-EX0644GEZZ	R	Zener, EX0644GE	AB
△ IC702	RH-FX0024CEZZ	R	FX0024CE	AG
△ VA701	RH-VX0047CEZZ	R	Varistor, VX0047CE	AF
PACKAGED CIRCUIT				
△ PR701	RMPTP0084CEZZ	R	Packaged Circuit	AM

Ref. No.	Part No.	★	Description	Code	Ref. No.	Part No.	★	Description	Code
DUNTK9075WEW6									
PWB-E: POWER UNIT (Continued)									
COILS AND TRANSFORMERS									
L501	VP-DF101K0000	R	Peaking, 100μH	AB	△ C704	VCFYSB2EB224K	R 0.22	250V	AD
L601	RCiLZ0822CEZZ	R	Coil, Z0822CE	AL	C705	VCEAVA1HN227M	R 220	50V Electrolytic	AC
L602	RCiLZ0720CEZZ	R	Coil, Z0720CE	AL	△ C706	VCQYTA1HM102J	R 1000p	50V Mylar	AA
△ L701	RCiLF0166CEZZ	R	Coil, F0166CE	AQ	△ C708	RC-KZ0057CEZZ	R 1500p	2KV	AD
△ L702	RCiLF0166CEZZ	R	Coil, F0166CE	AQ	△ C709	VCKYPH3DB561K	R 560p	2000V Ceramic	AC
△ L703	RCiLF0166CEZZ	R	Coil, F0166CE	AQ	△ C710	VCQPSC2JA333K	R 0.033	630V	AB
L704	RCiLP0226CEZZ	R	Coil, P0226CE	AD	C711	VCKYPH3DB561K	R 560p	2000V Ceramic	AC
L705	RCiLP0268CEZZ	R	Coil, P0268CE	AE	△ C712	VCEAVA1HN227M	R 220	50V Electrolytic	AC
L706	RCiLP0268CEZZ	R	Coil, P0268CE	AE	△ C713	VCEAGA2AW106M	R 10	100V Electrolytic	AC
L707	RCiLP0226CEZZ	R	Coil, P0226CE	AD	C716	RC-KZ021SCEZZ	R 0.01	250V	AE
△ T601	RTRNF0104PEZZ	R	H-Volt Transformer	BH	C717	RC-EZ0070CEZZ	R 330	160V Electrolytic	AH
T602	RTRNZ0057PEZZ	R	Transformer	AK	C718	RC-KZ0024CEZZ	R 0.001	2KV	AC
△ T701	RTRNZ0099PEZZ	R	Transformer	BB	C719	VCKYPA2HB102K	R 1000p	500V Ceramic	AA
△ T702	RTRNP0016PEZZ	R	Power Transformer	AR	C720	VCEAGH2CW227M	R 220	160V Electrolytic	AH
CONTROL					C721	VCEAGH1VW228M	R 2200	35V Electrolytic	AG
R631	RVR-M4634GEZZ	R	220K(B), SUB-CONT	AB	C722	VCEAGH1VW228M	R 2200	35V Electrolytic	AG
CAPACITORS					C723	VCEAGH1VW228M	R 2200	35V Electrolytic	AG
C501	VCQYTA1HM104J	R 0.1	50V Mylar	AA	△ C724	RC-KZ0029CEZZ	R 0.01	AC250V	AC
C502	VCEACA1HC225J	R 2.2	50V Electrolytic	AC	C727	VCQYTA1HM104J	R 0.1	50V Mylar	AA
C503	VCEAGA1CW108M	R 1000	16V Electrolytic	AD	C728	VCKYPA2HB102K	R 1000p	500V Ceramic	AA
C504	VCKYPA1HF103Z	R 0.01	50V Ceramic	AA	C730	RC-EZ1100CEZZ	R 1000	25V Electrolytic	AF
C505	VCEAGA1HW334T	R 0.33	50V Electrolytic	AC	C731	RC-EZ1100CEZZ	R 1000	25V Electrolytic	AF
C506	VCEACA1HC225J	R 2.2	50V Electrolytic	AC	C732	RC-EZ1100CEZZ	R 1000	25V Electrolytic	AF
C507	VCQYTA1HM223J	R 0.022	50V Mylar	AA	C733	VCKYPA2HB102K	R 1000p	500V Ceramic	AA
C508	VCCSPA1HL221J	R 220p	50V Ceramic	AA	C734	RC-EZ1100CEZZ	R 1000	25V Electrolytic	AF
C509	VCKYPA1HF103Z	R 0.01	50V Ceramic	AA	C735	RC-EZ1100CEZZ	R 1000	25V Electrolytic	AF
C510	VCEAGA1VW108M	R 1000	35V Electrolytic	AD	C736	VCEAGA2AW105M	R 1	100V Electrolytic	AB
C511	VCEAGA1HW107M	R 100	50V Electrolytic	AC	C739	VCFYFA1HA334J	R 0.33	50V	AB
C512	VCFYAA2AA224J	R 0.22	100V	AD	△ C740	RC-FZ021SCEZZ	R 0.22	AC25V	AE
C513	VCQYTA1HM103J	R 0.01	50V Mylar	AA	△ C741	VCQYTA1HM222J	R 2200p	50V Mylar	AA
C514	VCKYPA2HB391K	R 390p	500V Ceramic	AA	C746	VCKYPA1HF103Z	R 0.01	50V Ceramic	AA
C515	VCQYTA1HM683J	R 0.068	50V Mylar	AB	C750	VCKYPA1HF103Z	R 0.01	50V Ceramic	AA
C516	VCEAGA1VW108M	R 1000	35V Electrolytic	AD	C751	VCKYPA2HB102K	R 1000p	500V Ceramic	AA
C517	VCQYTA1HM683J	R 0.068	50V Mylar	AB	C752	VCKYPA2HB102K	R 1000p	500V Ceramic	AA
C518	VCEAGA1HW105M	R 1	50V Electrolytic	AC	C753	VCKYPA2HB102K	R 1000p	500V Ceramic	AA
C519	VCEACA1HC474K	R 0.47	50V Electrolytic	AB	C754	VCKYPA2HB102K	R 1000p	500V Ceramic	AA
C601	VCFYSB2EB103K	R 0.01	250V	AC	C755	VCEAGA2AW107M	R 100	100V Electrolytic	AD
C602	VCKYPA2HB471K	R 470p	500V Ceramic	AA	C756	VCEAGA1CW106M	R 10	16V Electrolytic	AA
C603	VCCCPA1HH101J	R 100p	50V Ceramic	AA	C757	VCEAGA1CW227M	R 220	16V Electrolytic	AC
C604	VCFPPD2DB474J	R 0.47	200V	AE	C758	VCEAGA1CW108M	R 1000	16V Electrolytic	AD
			Metalized Polypro Film		△ C759	VCEAGA1CW476M	R 47	16V Electrolytic	AB
C605	VCEAGA1HW106M	R 10	50V Electrolytic	AC	C761	RC-KZ0029CEZZ	R 0.01	250V	AC
C606	VCKYPA2HB102K	R 1000p	500V Ceramic	AA	RESISTORS				
C607	VCEAGA2EW336M	R 33	250V Electrolytic	AD	R501	VRD-RA2BE101J	R 100	1/8W Carbon	AB
△ C608	VCFPPD3CA822H	R 8200p	1600V	AE	R502	VRD-RA2BE101J	R 100	1/8W Carbon	AB
			Metalized Polypro Film		R503	VRD-RM2HD181J	R 180	1/2W Carbon	AA
△ C609	VCFPPD3CA822H	R 8200p	1600V	AE	R504	VRD-RM2HD181J	R 180	1/2W Carbon	AA
			Metalized Polypro Film		R505	VRD-RA2EE123J	R 12k	1/4W Carbon	AA
C610	VCQYSA2AA473K	R 0.047	100V Mylar	AC	R506	VRD-RA2BE101J	R 100	1/8W Carbon	AB
C612	VCFPPC2DB274J	R 0.27	200V	AE	△ R507	VRG-RF2EB220J	R 22	1/4W Fuse Resistor	AB
			Metalized Polypro Film		R508	VRD-RM2HD391J	R 390	1/2W Carbon	AA
C613	VCFPPC2DB334J	R 0.33	200V	AE	R509	VRD-RA2BE274J	R 270k	1/8W Carbon	AA
			Metalized Polypro Film		R510	VRD-RA2BE124J	R 120k	1/8W Carbon	AA
C614	VCKYPA2HB561K	R 560p	500V Ceramic	AA	R511	VRD-RA2BE683J	R 68k	1/8W Carbon	AA
C615	VCQPSC2JA473K	R 0.047	630V	AB	R512	VRD-RA2BE223J	R 22k	1/8W Carbon	AA
C616	VCE9RH1HW475K	R 4.7	50V Electrolytic	AF	R513	VRD-RM2HD2R7J	R 2.7	1/2W Carbon	AA
C617	VCKYPA2HB102K	R 1000p	500V Ceramic	AA	R514	VRD-RM2HD2R7J	R 2.7	1/2W Carbon	AA
C618	VCEAGH1VW228M	R 2200	35V Electrolytic	AG	R515	VRD-RM2HD2R7J	R 2.7	1/2W Carbon	AA
C619	VCFYSB2EB224K	R 0.22	250V	AD	R516	VRD-RA2BE102J	R 1k	1/8W Carbon	AA
C620	VCKYPA2HB331K	R 330p	500V Ceramic	AA	R517	VRD-RA2BE332J	R 3.3k	1/8W Carbon	AA
C621	VCEAGA1HW105M	R 1	50V Electrolytic	AC	R518	VRD-RA2BE223J	R 22k	1/8W Carbon	AA
C622	VCQYTA1HM682J	R 6800p	50V Mylar	AB	R519	VRD-RA2BE221J	R 220	1/8W Carbon	AA
C623	VCFYFA1HA474J	R 0.47	50V	AC	R601	VRS-KT3LB122J	R 1.2k	3W Metal Oxide	AC
△ C624	VCFPPC3CA272H	R 2700p	1600V	AD	R602	VRS-KT3LB122J	R 1.2k	3W Metal Oxide	AC
			Metalized Polypro Film		R603	VRS-VV3AB272J	R 2.7k	1W Metal Oxide	AA
△ C701	RC-FZ021SCEZZ	R 0.22	AC250V	AE	△ R604	RR-XZ0029CEZZ	R 3.3	1/2W Fuse Resistor	AB
△ C702	RC-FZ020SCEZZ	R 0.1	AC250V	AE	R606	VRD-RA2EE681J	R 680	1/4W Carbon	AA
△ C703	RC-EZ0443CEZZ	R 680	400V Electrolytic	AN	R607	VRD-RA2EE681J	R 680	1/4W Carbon	AA
					R608	VRD-RM2HD470J	R 47	1/2W Carbon	AA
					R609	VRW-KQ41C3R3K	R 3.3	15W Cement	AG
					R611	VRN-VV3LB1R8J	R 1.8	3W Metal Film	AC
					R612	VRD-RA2EE101J	R 100	1/4W Carbon	AA
					R613	VRD-RA2EE101J	R 100	1/4W Carbon	AA
					R614	VRD-RA2BE103J	R 10k	1/8W Carbon	AA

Ref. No.	Part No.	★	Description	Code
DUNTK9075WEW6				
PWB-E: POWER UNIT (Continued)				
R615	VRD-RM2HD102J	R	1k 1/2W Carbon	AA
R616	VRS-SU2HB102J	R	1k 1/2W Metal Oxide	AA
R617	VRD-RA2EE393J	R	39k 1/4W Carbon	AA
R618	VRD-RM2HD472J	R	4.7k 1/2W Carbon	AA
R619	VRD-RA2BE103J	R	10k 1/8W Carbon	AA
R620	VRD-RA2EE472J	R	4.7k 1/4W Carbon	AA
R621	VRD-RM2HD222J	R	2.2k 1/2W Carbon	AA
R622	VRN-VV3LB6R8J	R	6.8 3W Metal Film	AC
R623	VRD-RA2BE102J	R	1k 1/8W Carbon	AA
△ R624	VRD-RA2BE153J	R	15k 1/8W Carbon	AA
△ R625	VRD-RA2BE153J	R	15k 1/8W Carbon	AA
△ R626	VRD-RA2BE101J	R	100 1/8W Carbon	AB
△ R627	VRD-RA2BE103J	R	10k 1/8W Carbon	AA
R628	VRD-RA2BE224J	R	220k 1/8W Carbon	AA
R629	VRS-VV3DB561J	R	560 2W Metal Oxide	AA
△ R630	VRD-RA2BE102J	R	1k 1/8W Carbon	AA
R632	VRD-RA2EE274J	R	270k 1/4W Carbon	AA
R633	VRD-RA2EE824J	R	820k 1/4W Carbon	AA
R634	VRD-RA2EE334J	R	330k 1/4W Carbon	AA
R635	VRD-RA2EE564J	R	560k 1/4W Carbon	AA
R636	VRD-RA2BE103J	R	10k 1/8W Carbon	AA
R637	VRD-RA2BE103J	R	10k 1/8W Carbon	AA
R638	VRD-RA2BE560J	R	56 1/8W Carbon	AA
R639	VRD-RA2BE153J	R	15k 1/8W Carbon	AA
R640	VRD-RA2BE124J	R	120k 1/8W Carbon	AA
R641	VRD-RA2BE223J	R	22k 1/8W Carbon	AA
R642	VRD-RA2BE124J	R	120k 1/8W Carbon	AA
R643	VRD-RA2BE123J	R	12k 1/8W Carbon	AA
R644	VRD-RA2BE103J	R	10k 1/8W Carbon	AA
R645	VRD-RA2BE124J	R	120k 1/8W Carbon	AA
R646	VRD-RA2EE125J	R	1.2M 1/4W Carbon	AA
△ R648	VRD-RA2BE272J	R	2.7k 1/8W Carbon	AA
△ R650	VRN-VV3AB2R2J	R	2.2 1W Metal Film	AA
△ R701	VRC-UA2HG395K	R	3.9M 1/2W Solid	AA
△ R702	VRW-KQ41C1R5K	R	1.5 15W Cement	AG
△ R703	VRW-KQ41C1R5K	R	1.5 15W Cement	AG
△ R704	VRD-RM2HD391J	R	390 1/2W Carbon	AA
△ R705	VRS-VV3AB272J	R	2.7k 1W Metal Oxide	AA
△ R706	VRD-RA2BE822J	R	8.2k 1/8W Carbon	AA
△ R707	VRD-RA2EE101J	R	100 1/4W Carbon	AA
△ R708	VRD-RA2BE102J	R	1k 1/8W Carbon	AA
△ R709	VRN-VV3DB8R2J	R	8.2 2W Metal Film	AB
△ R710	VRD-RM2HD1R5J	R	1.5 1/2W Carbon	AA
△ R711	VRD-RM2HD152J	R	1.5k 1/2W Carbon	AA
△ R712	VRN-VV3LBR27J	R	0.27 3W Metal Film	AC
△ R713	VRS-KT3LB333J	R	33k 3W Metal Oxide	AC
△ R714	VRD-RM2HD822J	R	8.2k 1/2W Carbon	AA
△ R715	VRN-VV3LBR27J	R	0.27 3W Metal Film	AC
△ R716	VRC-UA2HG825K	R	8.2M 1/2W Solid	AA
R717	VRC-UA2HG825K	R	8.2M 1/2W Solid	AA
R718	VRD-RA2BE221J	R	220 1/8W Carbon	AA
△ R719	VRD-RM2HD393J	R	39k 1/2W Carbon	AA
△ R720	VRD-RA2BE393J	R	39k 1/8W Carbon	AA
△ R721	VRD-RM2HD153J	R	15k 1/2W Carbon	AA
△ R723	VRD-RA2BE393J	R	39k 1/8W Carbon	AA
△ R724	VRD-RA2BE473J	R	47k 1/8W Carbon	AA
△ R725	VRW-KQ4AC1R0K	R	1 10W Cement	AF
R727	VRD-RA2EE473J	R	47k 1/4W Carbon	AA
R728	VRD-RM2HD223J	R	22k 1/2W Carbon	AA
△ R734	VRS-VV3AB272J	R	2.7k 1W Metal Oxide	AA
△ R735	VRS-VV3AB272J	R	2.7k 1W Metal Oxide	AA
△ R738	VRD-RM2HD820J	R	82 1/2W Carbon	AA
△ R739	VRD-RA2BE102J	R	1k 1/8W Carbon	AA
△ R743	VRS-VV3AB272J	R	2.7k 1W Metal Oxide	AA
△ R744	VRS-VV3AB272J	R	2.7k 1W Metal Oxide	AA
R750	VRD-RA2BE472J	R	4.7k 1/8W Carbon	AA
R751	VRD-RA2BE332J	R	3.3k 1/8W Carbon	AA
R752	VRS-VV3DB472J	R	4.7k 2W Metal Oxide	AA
R753	VRS-VV3DB272J	R	2.7k 2W Metal Oxide	AA
R755	VRD-RA2BE561J	R	560 1/8W Carbon	AA
R757	VRD-RM2HD562J	R	5.6k 1/2W Carbon	AA
△ R760	VRD-RM2HD1R5J	R	1.5 1/2W Carbon	AA

Ref. No.	Part No.	★	Description	Code
△ R762	VRD-RA2BE101J	R	100 1/8W Carbon	AB
MISCELLANEOUS PARTS				
RDA750	PRDAR0007PEZZ	R	Heat Sink, for Q751	AE
RDA501	PRDAR0213PEFW	R	Heat Sink, for IC501	AM
△ RDA601	PRDAR0106PEFW	R	Heat Sink, for Q601	AL
RDA602	PRDAR0026PEFW	R	Heat Sink, for Q603	AD
△ RDA701	PRDAR0220PEFW	R	Heat Sink, for IC701	AR
△ RDA702	PRDAR0139PEFW	R	Heat Sink, for D701	AC
RDA703	PRDAR0106PEFW	R	Heat Sink, for D710	AL
FB601	RBLN-0037CEZZ	R	Balun	AB
FB602	RBLN-0037CEZZ	R	Balun	AB
FB603	RBLN-0037CEZZ	R	Balun	AB
△ FB701	RBLN-0037CEZZ	R	Balun	AB
△ FB702	RBLN-0037CEZZ	R	Balun	AB
FB703	RBLN-0037CEZZ	R	Balun	AB
FB704	RBLN-0037CEZZ	R	Balun	AB
FB707	RBLN-0037CEZZ	R	Balun	AB
FB708	RBLN-0037CEZZ	R	Balun	AB
FB709	RBLN-0037CEZZ	R	Balun	AB
FB710	RBLN-0037CEZZ	R	Balun	AB
FB712	RBLN-0037CEZZ	R	Balun	AB
FB713	RBLN-0037CEZZ	R	Balun	AB
FB714	RBLN-0037CEZZ	R	Balun	AB
△ FH701	QFSDH1013CEZZ	R	Fuse Holder	AC
△ FH702	QFSDH1014CEZZ	R	Fuse Holder	AC
△ F701	QFS-C5026CEZZ	R	Fuse, T5A 250V	AE
P601	QPLGN0603CEZZ	R	Plug, 6Pin	AB
P602	QPLGN0361CEZZ	R	Plug, 3Pin	AB
△ P701	QPLGN0304CEZZ	R	Plug, 3Pin	AB
△ P702	QPLGN0207CEZZ	R	Plug, 2Pin	AA
△ RY701	RRLYZ0020CEZZ	R	Relay	AN
SC603	QSOCN1003CENT	R	Socket, 10Pin	AC
SC704	QSOCN1003CENT	R	Socket, 10Pin	AC
SC703	QSOCN0403CENT	R	Socket, 4Pin	AC
△ S701	QSW-P0591CEZZ	R	Switch	AQ
SC601	QTIPM0083CEZZ	R	Tip	AB
△	CACCL3003PE01	J	AC Cord	

MISCELLANEOUS PARTS

QCNW-1688PEZZ	R	Connecting Cord	AL
QCNW-1884PEZZ	J	Connecting Cord	AH
QCNW-1984PEZZ	J	Connecting Cord	AL
QCNW-1985PEZZ	J	Connecting Cord	AL
QCNW-1986PEZZ	J	Connecting Cord	AM
QCNW-1988PEZZ	J	Connecting Cord	AH

SUPPLIED ACCESSORIES

ACCESSORIES

SP1	RRMCG1266PESA	J	Remote Control	BC
	TiNS-6610CEZZ		Operation Manual	
	RSP-Z0104PESA		AST Speaker Box (SX-68JS9 Only)	

ACCESSORIES (NOT REPLACEMENT ITEM)

TCAUA0002PEZZ	-	Caution Card	—
---------------	---	--------------	---


Ref. No.	Part No.	★	Description	Code
----------	----------	---	-------------	------

PACKING PARTS
(NOT REPLACEMNT ITEMS)

SPAKC5319CEZZ	-	Packing Case	—
SPAKP0853CEZZ	-	Wrapping Paper	—
SPAKX2879CEZZ	-	Packing Form	—
SSAKA0037CEZZ	-	Polyethylene Bag	—

CABINET PARTS

1	CCABA2488WEA0	Front Cabinet Ass'y	
1-1	Not Available	- Front Cabinet	—
1-2	HDECA0043PESB	SP Punching	
1-3	GCOVA0066PESA	J Cover, R/C LED	AE
1-4	GDORF0164PESC	Door	
1-5	HBDGB3120CESB	Badge, "SHARP"	
1-6	HiNDP0214PEZZ	J Door IND-P	AE
1-7	JBTN-0234PESB	Button, Power	
1-8	PKAi-0002PE00	J Latche, for Door	AG
1-9	MSPRC0005PEFW	R Spring, Power Button	AB
1-10	GCOVA0076PE00	Cover in PNC	
1-11	GCOVA0068PESA	Cover in Door	
2	CCABB2373WEA0	Cabinet	
2-1	Not Available	- Rear Cabinet	—

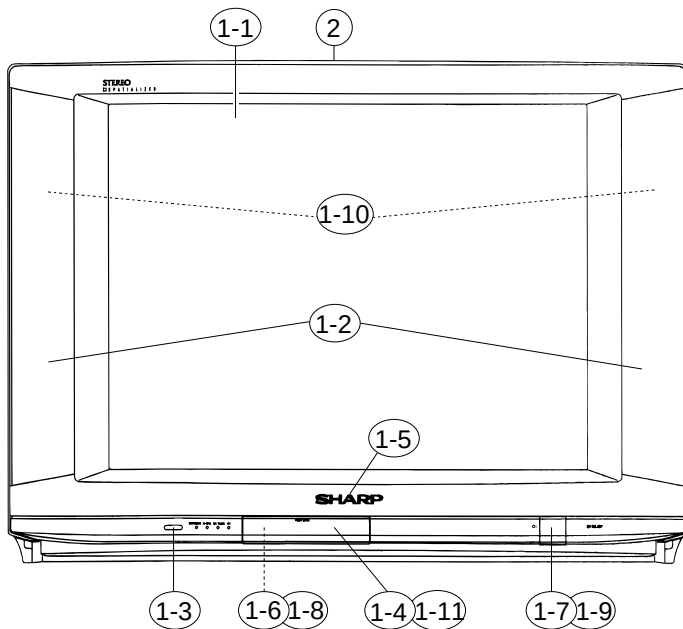



COPYRIGHT © 1999 BY SHARP CORPORATION

ALL RIGHTS RESERVED.

No part of this publication may be reproduced,
stored in a retrieval system, or transmitted in
any form or by any means, electronic, mechanical,
photocopying, recording, or otherwise, without
prior written permission of the publisher.